

Intel® Rack Scale Design (Intel® RSD) Pooled System Management Engine (PSME) Representational State Transfer (REST)

**API Specification
Software v2.3.2**

September 2018

Revision 003US



All information provided here is subject to change without notice. Contact your Intel representative to obtain the latest Intel product specifications and roadmaps

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software, or service activation. Performance varies depending on system configuration. No computer system can be absolutely secure. Check with your system manufacturer or retailer or learn more at www.intel.com.

No license (express, implied, by estoppel, or otherwise) to any intellectual property rights is granted by this document.

The products described may contain design defects or errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Intel disclaims all express and implied warranties, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and noninfringement, as well as any warranty arising from course of performance, course of dealing, or usage in trade.

Copies of documents that have an order number and are referenced in this document may be obtained by calling 18005484725 or by visiting <http://www.intel.com/design/literature.htm>.

Intel, Xeon, and the Intel logo are trademarks of Intel Corporation in the United States and other countries.

* Other names and brands may be claimed as the property of others.

Copyright © 2018 Intel Corporation. All rights reserved.



Table of Contents

1.0	Introduction	9
1.1	Scope.....	9
1.2	Intended Audience	9
1.3	Conventions	9
1.4	Notes and Symbol Convention.....	9
1.5	Terminology	10
1.6	Document References	10
2.0	PSME API.....	12
2.1	PSME API Structure and Relations	12
2.1.1	PSME API Physical Resource Hierarchy	12
3.0	PSME REST API Error Codes	16
3.1	API Error Response.....	16
3.1.1	Message Object.....	16
3.1.2	Example Error JSON Object	16
3.2	API Error Codes	17
3.2.1	General Error Codes.....	17
3.2.2	Patch Method Error Codes.....	18
4.0	PSME REST API Definition.....	19
4.1	OData Support.....	19
4.2	Asynchronous Operations	19
4.3	Protocol Version	19
4.3.1	Operations	20
4.4	OData Service Document.....	20
4.4.1	Operations	20
4.5	Intel® Rack Scale Design OEM Extensions.....	21
4.6	Service Root.....	21
4.6.1	Operations	21
4.7	Chassis Collection	23
4.7.1	Operations	23
4.8	Chassis Resource	24
4.8.1	Operations	24
4.9	Computer Systems Collection	27
4.9.1	Operations	27
4.10	Computer System	27
4.10.1	Operations	27
4.11	Computer System Metrics	36
4.11.1	Operations	36
4.12	Processor Collection	36
4.12.1	Operations	37
4.13	Processor	37
4.13.1	Operations	37
4.14	Processor Metrics.....	40
4.14.1	Operations	40
4.15	Memory Collection.....	41
4.15.1	Operations	41
4.16	Memory	42



4.16.1	Operations	42
4.17	Memory Metrics	43
4.17.1	Operations	44
4.18	Storage Subsystem Collection.....	44
4.18.1	Operations	44
4.19	Storage Subsystem.....	45
4.19.1	Operations	45
4.20	Volume Collection	46
4.20.1	Operations	47
4.21	Drive.....	47
4.21.1	Operations	47
4.22	System Network Interface	50
4.22.1	Operations	50
4.23	Manager Collection.....	52
4.23.1	Operations	52
4.24	Manager.....	53
4.24.1	Operations	53
4.25	Ethernet Switch Collection.....	54
4.25.1	Operations	55
4.26	Ethernet Switch.....	55
4.26.1	Operations	55
4.27	Ethernet Switch Metrics.....	58
4.27.1	Operations	59
4.28	Ethernet Switch Port Collection	59
4.28.1	Operations	59
4.29	Ethernet Switch Port.....	60
4.29.1	Operations	61
4.30	Ethernet Switch Port Metrics.....	65
4.30.1	Operations	65
4.31	Ethernet Switch ACL Collection.....	66
4.31.1	Operations	66
4.32	Ethernet Switch ACL	67
4.32.1	Operations	67
4.33	Ethernet Switch ACL Rule Collection	68
4.33.1	Operations	69
4.34	Ethernet Switch ACL Rule	73
4.34.1	Operations	73
4.35	Ethernet Switch Port Static MAC Collection.....	78
4.35.1	Operations	78
4.36	Ethernet Switch Port Static MAC.....	79
4.36.1	Operations	79
4.37	Network Protocol	80
4.37.1	Operations	82
4.38	Ethernet Interface Collection	83
4.38.1	Operations	83
4.39	Ethernet Interface	84
4.40	VLAN Network Interface Collection	84
4.40.1	Operations	84
4.41	VLAN Network Interface	86
4.41.1	Operations	86



4.42	Event Service.....	88
4.42.1	Operations	88
4.43	Event Subscription Collection.....	89
4.43.1	Metadata.....	89
4.43.2	Operations	89
4.44	Event Subscription.....	90
4.44.1	Metadata.....	91
4.44.2	Operations	91
4.45	Event Array.....	92
4.45.1	Metadata.....	93
4.45.2	Operations	93
4.46	Fabric Collection.....	94
4.46.1	Operations	94
4.47	Fabric.....	95
4.47.1	Operations	95
4.48	Switch collection	96
4.48.1	Operations	96
4.49	Switch.....	96
4.49.1	Operations	97
4.50	Port Collection.....	98
4.50.1	Operations	98
4.51	Port.....	99
4.51.1	Operations	99
4.52	Port Metrics.....	100
4.52.1	Operations	100
4.53	Zones Collection.....	101
4.53.1	Operations	101
4.54	Zone.....	102
4.54.1	Operations	103
4.55	Endpoint Collection.....	104
4.55.1	Operations	104
4.56	Endpoint	106
4.56.1	Operations	106
4.57	PCIe* Device	107
4.57.1	Operations	107
4.58	PCIe Device Function	109
4.58.1	Operations	109
4.59	Task Service.....	110
4.59.1	Operations	110
4.60	Task Collection.....	111
4.60.1	Operations	111
4.61	Task.....	111
4.61.1	Operations	112
4.62	Registries (MessageRegistryFileCollection)	113
4.62.1	Operations	113
4.63	Message Registry File	113
4.63.1	Operations	114
4.64	Metric Definition Collection	114
4.64.1	Operations	114
4.65	Metric Definition	116
4.65.1	Operations	116



4.66	Telemetry Service	118
4.66.1	Operations	118
4.67	Metric Report Definition Collection	119
4.67.1	Operations	119
4.68	Metric Report Definition	120
4.68.1	Operations	120
4.69	Metric Report Collection.....	121
4.69.1	Operations	121
4.70	Metric Report	122
4.70.1	Operations	122
4.71	Triggers Collection.....	123
4.71.1	Operations	123
4.72	Triggers.....	125
4.72.1	Operations	126
4.73	Power	127
4.73.1	Operations	128
4.74	Thermal	130
4.74.1	Operations	131
4.75	Network Interface Collection.....	134
4.75.1	Operations	134
4.76	Network Interface.....	134
4.76.1	Operations	135
4.77	Network Device Function Collection	135
4.77.1	Operations	135
4.78	Network Device Function.....	136
4.78.1	Operations	136
4.79	Update Service	140
4.79.1	Operations	140
4.80	ActionInfo.....	141
4.80.1	Operations	141
5.0	Required Resources per Service Type.....	143
6.0	Common Property Description	146
6.1	Status	146
6.2	Status -> State.....	146
6.3	Status -> Health	146
6.4	ComputerSystem.Reset.....	146
6.5	Bootsourceoverridetarget/Supported.....	147

Figures

Figure 1.	PSME REST API Hierarchy for Compute Resources	12
Figure 2.	PSME REST API Hierarchy for PNC Resources	13
Figure 3.	Chassis Relationship	23

Tables

Table 1.	Terminology	10
Table 2.	Document References	10



Table 3.	Resources and URIs.....	13
Table 4.	API Error Response Attributes	16
Table 5.	Message Object Attributes	16
Table 6.	HTTP Error Status Codes	17
Table 7.	Properties Updated by Patch Operation	26
Table 8.	Properties Updated by Patch Operation	33
Table 9.	Boot Override Update Properties.....	33
Table 10.	Action Parameters.....	35
Table 11.	Properties Updated by PATCH Operation	49
Table 12.	Properties Updated by Patch Operation	57
Table 13.	Properties Updated by Patch Operation	62
Table 14.	Port Attribute	68
Table 15.	New ACL Rule Condition Attributes.....	69
Table 16.	ACL Rule Condition Attributes	70
Table 17.	ACL Rule Modification Attributes.....	74
Table 18.	ACL Rule Condition Attributes	75
Table 19.	New Static MAC Entry Attributes	79
Table 20.	Static MAC Modification Attributes.....	80
Table 21.	Network Service Attributes	80
Table 22.	Post Action Attributes	85
Table 23.	Properties Updated by Patch Operation	86
Table 24.	Event Service Attributes	88
Table 25.	Event Subscription Attributes	90
Table 26.	Event Array Attributes.....	92
Table 27.	Event Attributes	92
Table 28.	Properties Updated by Patch Operation	103
Table 29.	Properties Updated by Patch Operation	108
Table 30.	Properties Updated by Patch Operation	138
Table 31.	Ethernet Object Properties	138
Table 32.	iSCSIBoot Object Properties.....	138
Table 33.	Required Resources per Service Type	143
Table 34.	Status	146



Revision History

Revision	Description	Date
003US	Intel® RSD software v2.3.2 minor release: • Table 3, replaced WIP with v1_0_0 • Updated Section 4.6 • Updated coded in Section 4.54.1.3	September 2018
002US	Intel® RSD software v2.3.1 interim release changes: • Section 4.13.4.1 GET replaced CPU with {ProcessorID} in code • Section 4.24 revised first paragraph • Removed Note below Table 20 • Section 4.55.1.1 Get Response code corrected • Section 4.58.1.1 Get Response code corrected • Section 4.61.1. Get Response code corrected • Section 4.65.1.2 GET Response code corrected • Section 4.65.1.3 GET Response code corrected • Section 4.75.1.1 Get Response code corrected • Section 4.77.1.1 Get Response code corrected • Section 4.78.1.3 Get Response code corrected • Updates PSME Storage Colum in Table 33	July 2018
001US	Initial release for Intel® RSD Storage Services software v2.3	March 2018



1.0 Introduction

1.1 Scope

This specification defines the interface to the Pooled System Management Engine (PSME) module to support Intel® Rack Scale Design (Intel® RSD) drawers, which cover the functionality designed and implemented in Intel® Rack Scale Design software v2.3.2.

The interface specified is based on the *Distributed Management Task Force's (DMTF) Redfish* Interface Specification and schema*, #DSP8010 v2016.3. The DMTF enhanced schema now includes the Sensor Model, which is still a work in progress at the Scalable Platforms Management Forum (SPMF). The [MemoryMetrics](#) model is based on the *Redfish/SPMF API DSP8010_2017.1*. For the location and title of documents mentioned, refer to [Table 2](#).

1.2 Intended Audience

The intended audience for this document includes:

- Software vendors (for example, independent software vendors (ISVs) of POD management applications, that make use of the PSME API to discover, compose, and manage Intel® RSD drawers, regardless of the hardware vendor
- Hardware vendors (for example, original equipment/design manufacturers (OxMs)) of PSME firmware that implement PSME firmware for Intel® RSD compliant systems

1.3 Conventions

The key words/phrases "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119; refer to [Table 2](#).


1.4 Notes and Symbol Convention

Symbol and note convention are similar to typographical conventions used in Cloud Infrastructure Management Interface (CIMI) Model and representational state transfer (REST) HTTP-based Protocol specification, refer to [Table 2](#).

Notation used in JSON* serialization description:

- Mandatory in italics indicate data types instead of literal Mandatory
- Characters are appended to items to indicate cardinality:
 - "?" (0 or 1)
 - "*" (0 or more)
 - "+" (1 or more)
- Vertical bars, "|", denote choice. For example, "a|b" means a choice between "a" and "b"
- Parentheses, "(" and ")", are used to indicate the scope of the operators "?", "*", "+" and "|"
- Ellipses (i.e., "...") indicate points of extensibility

Note: The lack of ellipses does not mean no extensibility point exists; rather it is just not explicitly called out.



1.5 Terminology

Table 1. Terminology

Term	Definition
ACL	Access Control List
BMC	Baseboard Management Controller
HTTP	Hypertext Transfer Protocol
Intel® RSD	Intel® Rack Scale Design
ISV	Independent Software Vendor
JSON*	JavaScript Object Notation*
NIC	Network Interface Card
OData	Open Data Protocol
OxM	Original Equipment/Design Manufacturer
PNC	Pooled Node Controller
PODM	Pod Manager
PSME	Pooled System Management Engine
PXE	Preboot Execution
REST	Representational State Transfer
SPMF	Scalable Platforms Management Forum
URI	Uniform Resource Identifier
UUID	Universally Unique Identifier
xSsV	Software Vendors

1.6 Document References

Table 2. Document References

Doc ID	Title	Location
337196	<i>Intel® Rack Scale Design (Intel® RSD) Pooled System Management Engine (PSME) User Guide Software v2.3.2</i>	http://www.intel.com/intelRSD
337197	<i>Intel® Rack Scale Design (Intel® RSD) Conformance and Software Reference Kit Getting Started Guide Software v2.3.2</i>	
337198	<i>Intel® Rack Scale Design (Intel® RSD) POD Manager (PODM) Release Notes Software v2.3.2</i>	
337199	<i>Intel® Rack Scale Design (Intel® RSD) POD Manager (PODM) Representational State Transfer (REST) User Guide Software v2.3.2</i>	
337200	<i>Intel® Rack Scale Design (Intel® RSD) Pooled System Management Engine (PSME) Release Notes Software v2.3.2</i>	
337201	<i>Intel® Rack Scale Design (Intel® RSD) Firmware Extension Specification Software v2.3.2</i>	
337202	<i>Intel® Rack Scale Design (Intel® RSD) Storage Services API Specification Software v2.3.2</i>	
337203	<i>Intel® Rack Scale Design (Intel® RSD) Architecture Specification Software v2.3.2</i>	
337204	<i>Intel® Rack Scale Design (Intel® RSD) POD Manager (PODM) Representational State Transfer (REST) API Specification Software v2.3.2</i>	
337205	<i>Intel® Rack Scale Design (Intel® RSD) Rack Management Module (RMM) Representational State Transfer (REST) API Specification Software v2.3.2</i>	
337206	<i>Intel® Rack Scale Design (Intel® RSD) Generic Assets Management Interface (GAMI) API Software v2.3.2</i>	



Doc ID	Title	Location
337207	Intel® Rack Scale Design (Intel® RSD) Pooled System Management Engine (PSME) Representational State Transfer (REST) API Specification Software v2.3.2	
DSP0263	Cloud Infrastructure Management Interface (CIMI) specification	https://www.dmtf.org/sites/default/files/standards/documents/DSP0263_1.0.1.pdf
DSP0266	Redfish* Scalable Platforms Management API Specification v1.4.0	https://www.dmtf.org/sites/default/files/DSP0266_1.4.0.pdf
DSP8010	Redfish*/SPMF API DSP8010_2017.1	http://redfish.dmtf.org/schemas/DSP8010_2017.1.zip
DSP8010	Redfish* Schema v2016.3	https://www.dmtf.org/sites/default/files/DSP8010_2017.3.zip
RFC2119	Key Words for Use in RFCs to Indicate Requirement Levels, March 1997	https://ietf.org/rfc/rfc2119.txt
RFC5789	PATCH Method for HTTP	https://www.ietf.org/mail-archive/web/ietf-announce/current/msg07238.html
N/A	Hypertext Transfer Protocol - HTTP/1.1	https://tools.ietf.org/html/rfc2616

§


2.1 PSME API Structure and Relations

The API hierarchy for compute resources is shown in [Figure 1](#), the API hierarchy for Pooled Node Controller (PNC) resources is shown in [Figure 2](#), and resources and Uniform Resource Identifiers (URI) are listed in [Table 3](#).


2.1.1 PSME API Physical Resource Hierarchy

PSME RESTful API

± Names are subject to change

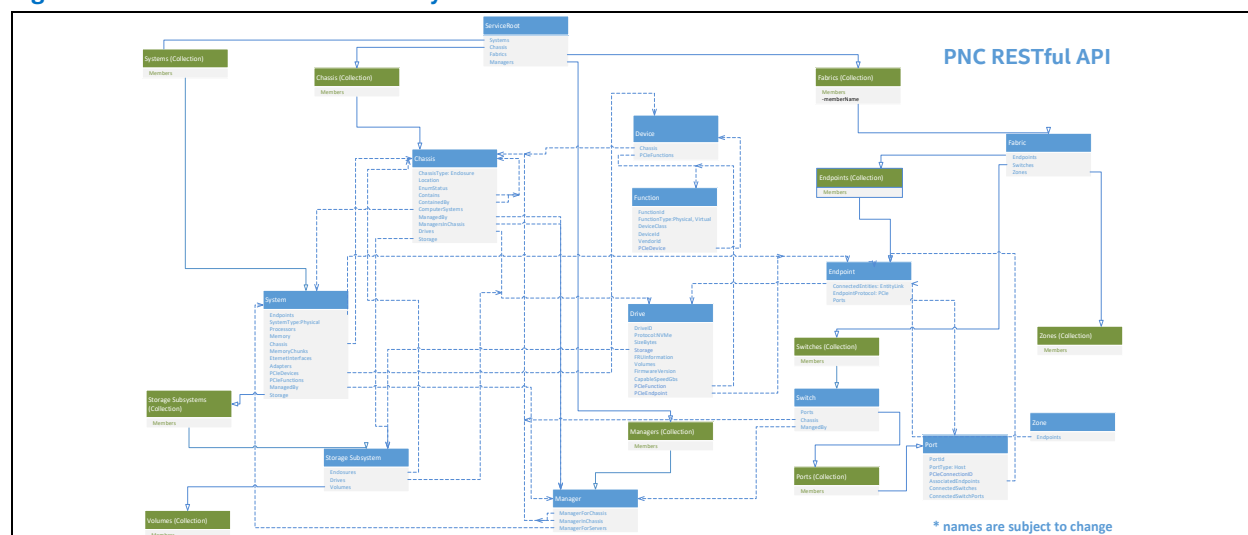Figure 2. PSME REST API Hierarchy for PNC Resources**Table 3. Resources and URIs**


Resource	Schema Version	OEM Extended?	URI
Service Root	v1_1_1	Yes	/redfish/v1
Chassis Collection		No	/redfish/v1/Chassis
Chassis	V1_3_0	Yes	/redfish/v1/Chassis/{chassisID}
Computer Systems Collection	–	No	/redfish/v1/Systems
Computer Systems	V1_2_0	Yes	/redfish/v1/Systems/{systemID}
Computer Systems Metrics	Oem v1_0_0	–	/redfish/v1/Systems/{systemID}/Metrics
Processors Collection	–	No	/redfish/v1/Systems/{systemID}/Processors
Processors	V1_0_0	Yes	/redfish/v1/Systems/{systemID}/Processors/{processorID}
Processors Metrics	Oem v1_0_0	–	/redfish/v1/Systems/{systemID}/Processors/{processorID}/Metrics
Memory Collection	–	–	/redfish/v1/Systems/{systemID}/Memory
Memory	V1_1_0	Yes	/redfish/v1/Systems/{systemID}/Memory/{memoryID}
Memory Metrics	V1_0_0	Yes	/redfish/v1/Systems/{systemID}/Memory/{memoryID}/Metrics
Storage Subsystem Collection	–	–	/redfish/v1/Systems/{systemID}/Storage
Storage Subsystem	V1_0_0	No	/redfish/v1/Systems/{systemID}/Storage/{storageID}
Drives	V1_1_1	Yes	/redfish/v1/Chassis/{chassisID}/Drives/{driveID}
Managers Collection	–	–	/redfish/v1/Managers
Managers	V1_2_0	No	/redfish/v1/Managers/{managerID}
NetworkProtocol	V1_0_0	No	/redfish/v1/Managers/{managerID}/NetworkProtocol
EthernetInterfaces Collection	–	–	/redfish/v1/Systems/{systemID}/EthernetInterfaces /redfish/v1/Managers/{managerID}/EthernetInterfaces



Resource	Schema Version	OEM Extended?	URI
EthernetInterfaces	V1_1_0	Yes	/redfish/v1/Systems/{systemID}/EthernetInterfaces/{nicID} /redfish/v1/Managers/{managerID}/EthernetInterfaces/{nicID}
EthernetSwitches Collection	-	-	/redfish/v1/EthernetSwitches
EthernetSwitches	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}
EthernetSwitches Metrics	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/Metrics
EthernetSwitches Ports Collection	-	-	/redfish/v1/EthernetSwitches/{switchID}/Ports
EthernetSwitches Ports	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}
EthernetSwitches Ports Metrics	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}/Metrics
EthernetSwitches Ports StaticMACs Collection	-	-	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}/StaticMACs
EthernetSwitches Ports StaticMACs	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}/StaticMACs/{macID}
EthernetSwitches Access Control Lists (ACL) collection	-	-	/redfish/v1/EthernetSwitches/{switchID}/ACLs
EthernetSwitches ACLs	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/ACLs/{aclID}
EthernetSwitches ACLs rules collection	-	-	/redfish/v1/EthernetSwitches/{switchID}/ACLs/{aclID}/Rules
EthernetSwitches ACLs rules	Oem v1_0_0	-	/redfish/v1/EthernetSwitches/{switchID}/ACLs/{aclID}/Rules/{ruleID}
VLANs Network Interface Collection	-	-	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}/VLANs /redfish/v1/Systems/{systemID}/EthernetInterfaces/{nicID}/VLANs /redfish/v1/Managers/{managerID}/EthernetInterfaces/{nicID}/VLANs
VLANs Network Interface	V1_0_1	Yes	/redfish/v1/EthernetSwitches/{switchID}/Ports/{portID}/VLANs/{vlanID} /redfish/v1/Systems/{systemID}/EthernetInterfaces/{nicID}/VLANs/{vlanID} /redfish/v1/Managers/{managerID}/EthernetInterfaces/{nicID}/VLANs/{vlanID}
EventService	V1_0_0	No	/redfish/v1/EventService
Event Subscriptions Collection	-	-	/redfish/v1/EventService/Subscriptions
Event Subscriptions	V1_1_1	No	/redfish/v1/EventService/Subscriptions/{subscriptionID}
Fabrics collection	-	-	/redfish/v1/Fabrics
Fabric	V1_0_0	No	/redfish/v1/Fabrics/{fabricID}
Fabrics Switches collection	-	-	/redfish/v1/Fabrics/{fabricID}/Switches
Fabrics Switches	V1_0_0	No	/redfish/v1/Fabrics/{fabricID}/Switches/{switchID}
Fabrics Switches Ports collection	-	-	/redfish/v1/Fabrics/{fabricID}/Switches/{switchID}/Ports



Resource	Schema Version	OEM Extended?	URI
Fabrics Switches Ports	V1_0_0	Yes	/redfish/v1/Fabrics/{fabricID}/Switches/{switchID}/Ports/{portID}
Fabrics Switches Ports Metrics	Oem v1_0_0	-	/redfish/v1/Fabrics/{fabricID}/Switches/{switchID}/Ports/{portID}/Metrics
Fabrics Zone collection	-	-	/redfish/v1/Fabrics/{fabricID}/Zones
Fabrics Zones	V1_0_0	No	/redfish/v1/Fabrics/{fabricID}/Zones/{zoneID}
Endpoints Collection	-	-	/redfish/v1/Fabrics/{fabricID}/Endpoints
Endpoints	V1_0_0	No	/redfish/v1/Fabrics/{fabricID}/Endpoints/{endpointID}
PCIeDevices	V1_0_0	No	/redfish/v1/Chassis/{chassisID}/PCIeDevices/{deviceID}
PCIeDevices Function	V1_0_0	No	/redfish/v1/Chassis/{chassisID}/PCIeDevices/{deviceID}/Functions/{functionID}
TelemetryService	V1_0_0	-	/redfish/v1/TelemetryService
MetricDefinitions Collection	V1_0_0	-	/redfish/v1/TelemetryService/MetricDefinitions
MetricDefinitions	V1_0_0	-	/redfish/v1/TelemetryService/MetricDefinitions/{metricDefinitionID}
MetricReportDefinitions Collection	V1_0_0	-	/redfish/v1/TelemetryService/MetricReportDefinitions
MetricReportDefinitions	V1_0_0	-	/redfish/v1/TelemetryService/MetricReportDefinitions/{metricReportDefinitionID}
MetricReports Collection	V1_0_0	-	/redfish/v1/TelemetryService/MetricReports
MetricReports	V1_0_0	-	/redfish/v1/TelemetryService/MetricReports/{metricReportID}
Triggers Collection	V1_0_0	-	/redfish/v1/TelemetryService/Triggers
Triggers	V1_0_0	-	/redfish/v1/TelemetryService/Triggers/{triggerID}
NetworkInterfaces collection	-	-	/redfish/v1/Systems/{systemID}/NetworkInterfaces
NetworkInterfaces	V1_0_0	No	/redfish/v1/Systems/{systemID}/NetworkInterfaces/{interfaceID}
NetworkDeviceFunctions collection	-	-	/redfish/v1/Systems/{systemID}/NetworkInterfaces/{interfaceID}/NetworkDeviceFunctions
NetworkDeviceFunctions	V1_0_0	No	/redfish/v1/Systems/{systemID}/NetworkInterfaces/{interfaceID}/NetworkDeviceFunctions/{functionID}
TaskService	V1_0_0	No	/redfish/v1/TaskService
Tasks Collection	-	-	/redfish/v1/TaskService/Tasks
Tasks	V1_0_0	No	/redfish/v1/TaskService/Tasks/{taskID}
Power	V1_1_0	No	/redfish/v1/Chassis/{chassisID}/Power
Thermal	V1_1_0	No	/redfish/v1/Chassis/{chassisID}/Thermal
UpdateService	V1_1_0	No	/redfish/v1/UpdateService
ActionInfo	V1_0_0	No	/redfish/v1/UpdateService/SimpleUpdateActionInfo



3.0 PSME REST API Error Codes

This chapter contains descriptions of all error codes that may be returned by the REST calls implemented in the PSME REST API in the Intel® Rack Scale Design (Intel® RSD) software v2.3.2 release; refer to [Table 2](#).

3.1 API Error Response

In the case of an error, the PSME REST API responds with a Hypertext Transfer Protocol (HTTP) status code, as defined by the HTTP 1.1 specification (see [Table 2](#)), and constrained by additional requirements described in this specification.

HTTP response status codes alone often do not provide enough information to enable deterministic error semantics. Intel® PSME REST API returns extended error information as a JSON object with single property named "error". The value of this property is a JSON object with the properties shown in [Table 4](#).

Table 4. API Error Response Attributes

Attribute	Description
code	A string indicating a specific MessageId from the message registry. "Base.1.0.GeneralError" should be used only if there is no better message.
message	A human readable error message corresponding to the message in the message registry.
@Message.ExtendedInfo	An array of message objects describing one or more error message(s).

3.1.1 Message Object

Message Objects provide additional information about an object, property, or error response.

Messages are represented as a JSON object with the properties listed in [Table 5](#).

Table 5. Message Object Attributes

Attribute	Description
MessageId	String indicating a specific error or message (not to be confused with the HTTP status code). This code can be used to access a detailed message from a message registry.
Message	A human readable error message indicating the semantics associated with the error. This is the complete message, and it does not rely on substitution variables.
MessageArgs	An optional array of strings representing the substitution parameter values for the message. This is included in the response if a MessageId is specified for a parameterized message.
Severity	An optional string representing the severity of the error.
Resolution	An optional string describing recommended action(s) to take to resolve the error.
RelatedProperties	An optional array of JSON Pointers defining the specific properties within a JSON payload described by the message.

3.1.2 Example Error JSON Object

```
{
  "error": {
    "code": "Base.1.0.GeneralError",
    "message": "A general error has occurred. See ExtendedInfo for more
information.",
    "@Message.ExtendedInfo": [
      {
        "@odata.type" : "/redfish/v1/$metadata#Message.v1_0_0.Message",
        "MessageId": "Base.1.0.MalformedJSON",
```



```

    "Message": "The request body submitted was malformed JSON and could
not be parsed by the receiving service",
    "Severity": "Error"
  }
  {
    "@odata.type" : "/redfish/v1/$metadata#Message.v1_0_0.Message",
    "MessageId": "Base.1.0.PropertyNotWriteable",
    "RelatedProperties": [
      "#/Name"
    ],
    "Message": "The property Name is a read only property and cannot be
assigned a value",
    "MessageArgs": [
      "Name"
    ],
    "Severity": "Warning",
    "Resolution": "Remove the property from the request body and resubmit
the request if the operation failed"
  }
]
}

```

3.2 API Error Codes

In general, if an error is not described in [Table 6](#), it is to be mapped into HTTP 500 Internal Error code.


3.2.1 General Error Codes

For a detailed list of stats error codes refer to *Redfish* Scalable Platforms Management API Specification*, Section 6.5.2. Refer to [Table 2](#) for a list of references.

The client should be prepared and ready to handle the error codes listed in [Table 6](#).

Table 6. HTTP Error Status Codes

HTTP Status Code	Description
400 Bad Request	The request could not be processed because it contains missing or invalid information (such as validation error on an input field, a missing required value, and so on). An extended error is returned in the response body.
404 Not Found	The request specified a URI of a resource that does not exist.
405 Method Not Allowed	The HTTP verb specified in the request (e.g., DELETE, GET, HEAD, POST, PUT, and PATCH) is not supported for this request URI. The response includes an Allow header, which provides a list of methods that are supported by the resource identified by the Request-URI.
409 Conflict	A creation or update request could not be completed, because it would cause a conflict in the current state of the resources supported by the platform (for example, an attempt to set multiple attributes that work in a linked manner using incompatible values).
500 Internal Server Error	The server encountered an unexpected condition that prevented it from fulfilling the request. An extended error is returned in the response body.
501 Not Implemented	The server does not (currently) support the functionality required to fulfill the request. This is the appropriate response when the server does not recognize the request method and is not capable of supporting it for any resource.
503 Service Unavailable	The server is currently unable to handle the request due to temporary overloading or maintenance of the server.



3.2.2 Patch Method Error Codes

For PATCH methods, the Intel® RSD service conforms to IETF RFC 5789. Refer to [Table 2](#) for details.

Service responds with the following error codes in the following cases:

- **400 Bad Request** – malformed JSON in request (values not in range, unknown property, etc.).
- **405 Method Not Allowed** – resource does not support PATCH method.
- **409 Conflict** – update cannot be executed at this moment. User might be able to resolve the conflict and resubmit the request.
- **501 Not Implemented** – resource supports PATCH method, but current implementation doesn't (e.g., underlying HARDWARE doesn't support such functionality).
- **500 Internal Server Error** – all other situations where any of the above codes does not fit (e.g., underlying HARDWARE does not allow to execute this particular request).

§



4.0 PSME REST API Definition

Important note: The JavaScript* object notation (JSON) examples in this document are informative, not normative. Metadata files that are referenced by this specification are normative.

4.1 OData Support

Intel® Rack Scale Design (Intel® RSD) supports the Open Data Protocol (OData) v4.0 as it is defined in Redfish* *Scalable Platforms Management API Specification*, [Table 4](#).

All resources within this REST API are identified by a unique identifier property named "@odata.id". Resource Identifiers is represented in JSON payloads as URI paths relative to the Redfish Schema portion of the URI. For example, the URIs always start with `"/redfish/"`. The resource identifier is the canonical URI for the resource and can be used to retrieve or edit the resource, as appropriate.

4.2 Asynchronous Operations

While the majority of operations in this architecture are synchronous in nature, some operations can take a long time to execute, more time than a client typically wants to wait. For this reason, some operations can be asynchronous at the discretion of the service. The request portion of an asynchronous operation is no different from the request portion of a synchronous operation.

The use of HTTP response codes enable a client to determine if the operation was completed synchronously or asynchronously. Clients must be prepared to handle both synchronous and asynchronous responses for requests using HTTP DELETE, POST, PATCH and PUT methods.

For details, refer to *Redfish* Scalable Platforms Management API Specification*, Section 8.2, Asynchronous operations; see [Table 2](#).

4.3 Protocol Version

The protocol version is separate from the version of the resources or the version of the Redfish Schema supported by them.

Each version of the Redfish protocol is strongly typed. This is accomplished using the URI of the Redfish service in combination with the resource obtained at that URI, called the `ServiceRoot`.

The root URI for this version of the Redfish protocol is `"/redfish/v1/"`.


While the major version of the protocol is represented in the URI, the major version, minor version, and errata version of the protocol are represented in the version property of the `ServiceRoot` resource, as defined in the Redfish Schema for that resource. The protocol version is a string of the form:

`MajorVersion.MinorVersion.Errata`

Where:

- MajorVersion = integer: something in the class changed in a backward incompatible way.
- MinorVersion = integer: a minor update. New functionality may have been added, but nothing removed. Compatibility will be preserved with previous minor versions.
- Errata = integer: something in the prior version was broken and needed to be fixed.

Any resource discovered through links can be found by accessing the root service, or any service or resource referenced. Using references from the root service conforms to the same version of the protocol supported by the root service.



4.3.1 Operations

4.3.1.1 GET

Request:

```
GET /redfish
Content-Type: application/json
```

Response:

```
{
  "v1": "/redfish/v1/"
}
```

4.4 OData Service Document

This service document provides a standard format for enumerating the resources exposed by the service, enabling generic hypermedia-driven OData clients to navigate to the resources of the service.

4.4.1 Operations

4.4.1.1 GET

Request:

```
GET /redfish/v1/odata
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata",
  "value": [
    {
      "name": "Service",
      "kind": "Singleton",
      "url": "/redfish/v1/"
    },
    {
      "name": "Systems",
      "kind": "Singleton",
      "url": "/redfish/v1/Systems"
    },
    {
      "name": "Chassis",
      "kind": "Singleton",
      "url": "/redfish/v1/Chassis"
    },
    {
      "name": "Managers",
      "kind": "Singleton",
      "url": "/redfish/v1/Managers"
    },
    {
      "name": "Services",
      "kind": "Singleton",
      "url": "/redfish/v1/Services"
    }
  ]
}
```



```

        "name": "EthernetSwitches",
        "kind": "Singleton",
        "url": "/redfish/v1/EthernetSwitches"
    },
    {
        "name": "EventService",
        "kind": "Singleton",
        "url": "/redfish/v1/EventService"
    },
    {
        "name": "Tasks",
        "kind": "Singleton",
        "url": "/redfish/v1/TaskService"
    },
    {
        "name": "Registries",
        "kind": "Singleton",
        "url": "/redfish/v1/Registries"
    },
    {
        "name": "Fabrics",
        "kind": "Singleton",
        "url": "/redfish/v1/Fabrics"
    },
    {
        "name": "UpdateService",
        "kind": "Singleton",
        "url": "/redfish/v1/UpdateService"
    }
]
}

```

4.5 Intel® Rack Scale Design OEM Extensions

All Intel® RSD Original Equipment Manufacturer (OEM) extensions to all resources defined in this document are supported.

4.6 Service Root

Service root resource – entry point.

Property details are available in `ServiceRoot.xml` metadata file. OEM extension details are available in `IntelRackScaleOem.xml`.

All PSME implementations should allow for setting the "Name" property in the service configuration file. This property is used by PODM for recognising the type of a service.

4.6.1 Operations

4.6.1.1 GET

Request:


```

GET /redfish/v1
Content-Type: application/json

```

Response:

```
{
```



```
"@odata.context": "/redfish/v1/$metadata#ServiceRoot.ServiceRoot",
"@odata.id": "/redfish/v1/",
"@odata.type": "#ServiceRoot.v1_1_1.ServiceRoot",
"Id": "RootService",
"Name": " PSME Root Service",
"Description": "description-as-string",
"RedfishVersion": "1.1.0",
"UUID": "92384634-2938-2342-8820-489239905423",
"Systems": {
  "@odata.id": "/redfish/v1/Systems"
},
"Chassis": {
  "@odata.id": "/redfish/v1/Chassis"
},
"Managers": {
  "@odata.id": "/redfish/v1/Managers"
},
"EventService": {
  "@odata.id": "/redfish/v1/EventService"
},
"Fabrics": {
  "@odata.id": "/redfish/v1/Fabrics"
},
"Tasks": {
  "@odata.id": "/redfish/v1/TaskService"
},
"Registries": {
  "@odata.id": "/redfish/v1/Registries"
},
"TelemetryService": {
  "@odata.id": "/redfish/v1/TelemetryService"
},
"Oem": {
  "Intel_RackScale": {
    "@odata.type": "#Intel.Oem.ServiceRoot",
    "ApiVersion": "2.2.0",
    "Services": {
      "@odata.id": "/redfish/v1/Services"
    },
    "EthernetSwitches": {
      "@odata.id": "/redfish/v1/EthernetSwitches"
    }
  }
},
"UpdateService": {
  "@odata.id": "/redfish/v1/UpdateService"
},
"Links": {}
}
```

4.6.1.2 PUT

Operation is not allowed on this resource.

4.6.1.3 PATCH

Operation is not allowed on this resource.

4.6.1.4 POST

Operation is not allowed on this resource.

4.6.1.5 DELETE


Operation is not allowed on this resource.

4.7 Chassis Collection

Chassis collection resource.

Figure 3 shows the relationship between chassis components in this example Intel® RSD rack.

Figure 3. Chassis Relationship

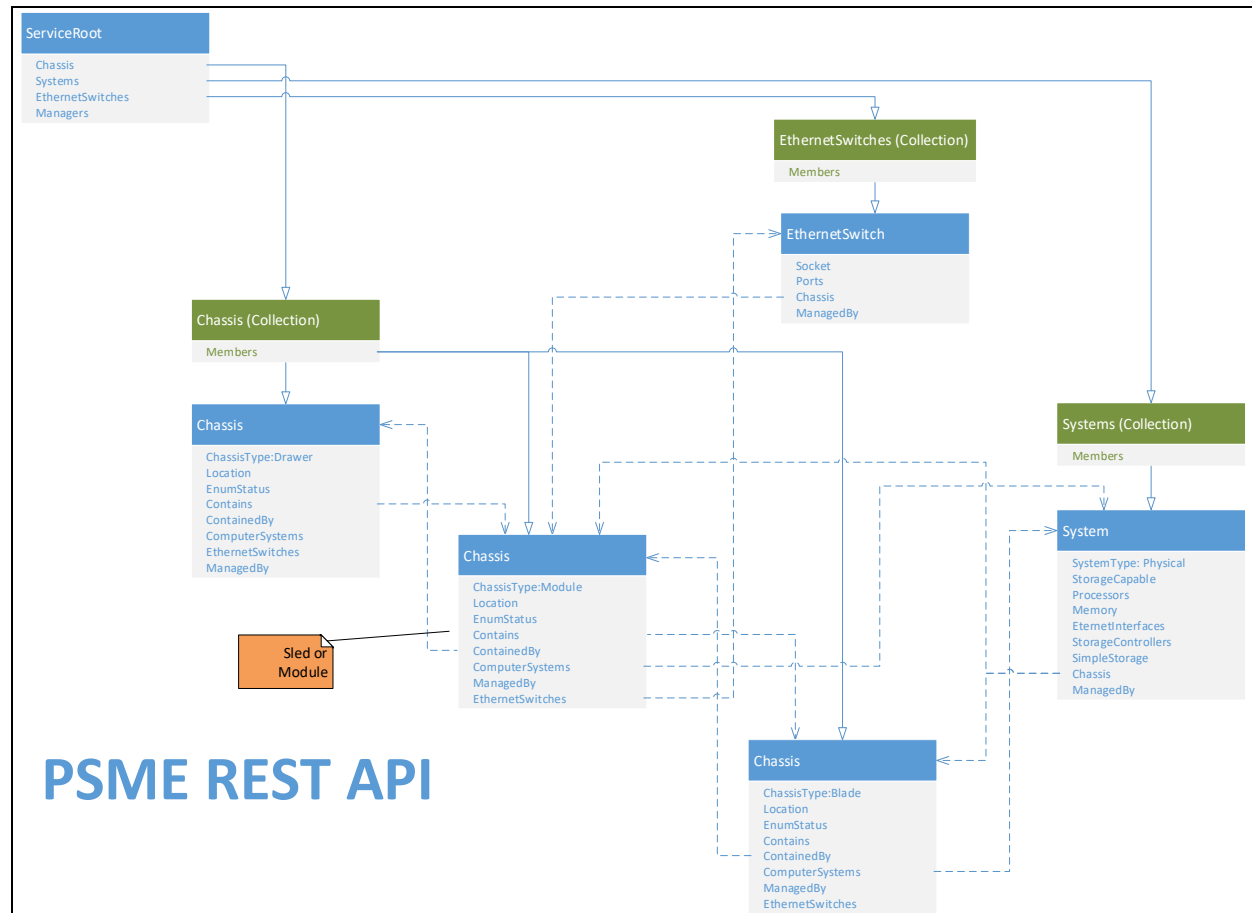

4.7.1 Operations

4.7.1.1 GET

Request:

```
GET /redfish/v1/Chassis
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ChassisCollection.ChassisCollection",
  "@odata.id": "/redfish/v1/Chassis",
  "@odata.type": "#ChassisCollection.ChassisCollection",
}
```

```

    "Name": "Chassis Collection",
    "Description": "description-as-string",
    "Members@odata.count": 4,
    "Members": [
      {
        "@odata.id": "/redfish/v1/Chassis/Drawer1"
      },
      {
        "@odata.id": "/redfish/v1/Chassis/FabricModule1"
      },
      {
        "@odata.id": "/redfish/v1/Chassis/Sled1"
      },
      {
        "@odata.id": "/redfish/v1/Chassis/Blade1"
      }
    ]
  }
}

```

4.7.1.2 PUT

Operation is not allowed on this resource.

4.7.1.3 PATCH

Operation is not allowed on this resource.

4.7.1.4 POST

Operation is not allowed on this resource.

4.7.1.5 DELETE

Operation is not allowed on this resource.

4.8 Chassis Resource

This section provides the schema definition for the Chassis resource. It represents the properties for physical components for any system. This resource is intended to represent racks, rackmount servers, blades, standalone, modular systems, enclosures, and all other containers. The non-cpu/device centric parts of the schema are all accessed either directly or indirectly through this resource.

Details of this resource are described in metadata file: [Chassis.xml](#). OEM extensions details are available in [IntelRackScaleOem.xml](#).

4.8.1 Operations

4.8.1.1 GET

Request:

```

GET /redfish/v1/Chassis/1
Content-Type: application/json

```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#Chassis.Chassis",


```



```

"@odata.id": "/redfish/v1/Chassis/Blade1",
"@odata.type": "#Chassis.v1_4_0.Chassis", "#Chassis.v1_4_0.Links",
"Id": "Blade1",
"ChassisType": "Blade",
"Name": "name-as-string",
"Description": "description-as-string",
"Manufacturer": "Intel Corporation",
"Model": "model-as-string",
"SKU": "sku-as-string",
"SerialNumber": "serial-number-as-string",
"PartNumber": "part-number-as-string",
"AssetTag": null,
"IndicatorLED": null,
"Status": {
    "State": "Enabled",
    "Health": "OK"
    "HealthRollup": "OK"
},
"Oem": {
    "Intel_RackScale": {
        "@odata.type": "#Intel.Oem.Chassis",
        "Location": {
            "Id": "Blade1",
            "ParentId": "Sled1"
        }
    }
},
"Links": {
    "@odata.type": "#Chassis.v1_2_0.Links",
    "Contains": [],
    "ContainedBy": {
        "@odata.id": "/redfish/v1/Chassis/Sled1"
    },
    "ComputerSystems": [{
        "@odata.id": "/redfish/v1/Systems/System1"
    }],
    "ManagedBy": [{
        "@odata.id": "/redfish/v1/Managers/VirtualBMC1"
    }],
    "ManagersInChassis": [{
        "@odata.id": "/redfish/v1/Managers/Manager1"
    }],
    "Storage": [
        {"@odata.id": "/redfish/v1/Systems/System1/Storage/SATA"}
    ],
    "Drives": [
        {"@odata.id": "/redfish/v1/Chassis/Blade1/Drives/1"}
    ],
    "Oem": {
        "Intel_RackScale": {
            "@odata.type": "#Intel.Oem.ChassisLinks",
            "Switches": [],
        },
    },
    "PoweredBy": [],
    "CooledBy": []
},
"PowerState": "On",
"Thermal": {
    "@odata.id": "/redfish/v1/Chassis/Blade1/Thermal"
},

```



```
"Power": {  
  "@odata.id": "/redfish/v1/Chassis/Blade1/Power"  
}
```

4.8.1.2 PUT

Operation is not allowed on this resource.

4.8.1.3 PATCH

The properties in [Table 7](#) can be updated by the PATCH operation:

Table 7. Properties Updated by Patch Operation

Attribute	Type	Required	Description
AssetTag	String	No	The user assigned asset tag for this chassis.
Oem->Intel_RackScale->Location	Object	No	Object representing physical location of chassis. Following properties can be patched: "Id" - String containing physical location ID of this chassis.

Request:

```
PATCH /redfish/v1/Chassis/1  
Content-Type: application/json  
{  
  "AssetTag": "Chassis1",  
  "Oem": {  
    "Intel_RackScale": {  
      "Location": {  
        "Id": "Blade1"  
      }  
    }  
  }  
}
```

Response:

```
HTTP/1.1 204 No Content
```

Or:

```
HTTP/1.1 200 OK  
{  
  (updated resource body)  
}
```

4.8.1.4 POST

Operation is not allowed on this resource.

4.8.1.5 DELETE

Operation is not allowed on this resource.



4.9 Computer Systems Collection

4.9.1 Operations

4.9.1.1 GET

Request:

```
GET /redfish/v1/Systems
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#ComputerSystemCollection.ComputerSystemCollection",
  "@odata.id": "/redfish/v1/Systems",
  "@odata.type": "#ComputerSystemCollection.ComputerSystemCollection",
  "Name": "Computer System Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Systems/System1"
    }
  ]
}
```

4.9.1.2 PUT

Operation is not allowed on this resource.

4.9.1.3 PATCH

Operation is not allowed on this resource.

4.9.1.4 POST

Operation is not allowed on this resource.

4.9.1.5 DELETE


Operation is not allowed on this resource.

4.10 Computer System

This schema defines a computer system and its respective properties. A computer system represents a machine (physical or virtual) and the local resources such as memory, CPU, and other devices that can be accessed from that machine.

Details of this resource are described in metadata file: [ComputerSystem.xml](#) OEM extensions details available in [IntelRackScaleOem.xml](#).

4.10.1 Operations



4.10.1.1 GET (PSME Compute)

Request:

```
GET /redfish/v1/Systems/{systemID}
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ComputerSystem.ComputerSystem",
  "@odata.id": "/redfish/v1/Systems/System1",
  "@odata.type": "#ComputerSystem.v1_3_0.ComputerSystem",
  "Id": "System1",
  "Name": "My Computer System",
  "Description": "Description of server",
  "SystemType": "Physical",
  "AssetTag": "free form asset tag",
  "Manufacturer": "Manufacturer Name",
  "Model": "Model Name",
  "SKU": "SKU",
  "SerialNumber": "2M220100SL",
  "PartNumber": "Computer1",
  "UUID": "00000000-0000-0000-0000-000000000000",
  "HostName": null,
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "IndicatorLED": "Off",
  "PowerState": "On",
  "Boot": {
    "@odata.type": "#ComputerSystem.v1_1_0.Boot",
    "BootSourceOverrideEnabled": "Once",
    "BootSourceOverrideTarget": "Pxe",
    "BootSourceOverrideTarget@Redfish.AllowableValues": [
      "None",
      "Pxe",
      "Hdd",
      "RemoteDrive"
    ],
    "BootSourceOverrideMode": "Legacy",
    "BootSourceOverrideMode@Redfish.AllowableValues": [
      "Legacy",
      "UEFI"
    ]
  },
  "BiosVersion": "P79 v1.00 (09/20/2013)",
  "ProcessorSummary": {
    "Count": 8,
    "Model": "Multi-Core Intel(R) Xeon(R) processor 7xxx Series",
    "Status": {
      "State": "Enabled",
      "Health": "OK",
      "HealthRollup": "OK"
    }
  },
  "MemorySummary": {
    "TotalSystemMemoryGiB": 16.0,
    "Status": {
      "State": "Enabled",
      "Health": "OK",


```



```

    "HealthRollup": "OK"
  }
},
"Processors": {
  "@odata.id": "/redfish/v1/Systems/System1/Processors"
},
"EthernetInterfaces": {
  "@odata.id": "/redfish/v1/Systems/System1/EthernetInterfaces"
},
"SimpleStorage": {},
"Storage": {
  "@odata.id": "/redfish/v1/Systems/System1/Storage"
},
"Memory": {
  "@odata.id": "/redfish/v1/Systems/System1/Memory"
},
"PCIeDevices": [],
"PCIeFunctions": [],
"TrustedModules": [
  {
    "@odata.type": "#ComputerSystem.v1_3_0.TrustedModules",
    "FirmwareVersion": "0.001",
    "InterfaceType": "TPM2_0",
    "Status": {
      "State": "Enabled",
      "Health": null,
      "HealthRollup": null
    },
    "Oem": {},
    "FirmwareVersion2": null,
    "InterfaceTypeSelection": "OemMethod"
  }
],
"Links": {
  "@odata.type": "#ComputerSystem.v1_2_0.Links",
  "Chassis": [
    {
      "@odata.id": "/redfish/v1/Chassis/4"
    }
  ],
  "ManagedBy": [
    {
      "@odata.id": "/redfish/v1/Managers/1"
    }
  ],
  "Endpoints": [],
  "Oem": {
  }
},
"Actions": {
  "#ComputerSystem.Reset": {
    "target": "/redfish/v1/Systems/System1/Actions/ComputerSystem.Reset",
    "ResetType@Redfish.AllowableValues": [
      "On",
      "ForceOff",
      "GracefulShutdown",
      "ForceRestart",
      "Nmi",
      "GracefulRestart",
      "ForceOn",
      "PushPowerButton"
    ]
  }
]

```



```
{
  "Oem": {
    "#Intel.Oem.StartDeepDiscovery": {
      "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDeepDiscovery"
    },
    "#Intel.Oem.StartDiscoveryOnDemand": {
      "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDiscoveryOnDemand"
    },
    "#Intel.Oem.ChangeTPMState": {
      "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.ChangeTPMState",
      "InterfaceType@Redfish.AllowableValues": [
        "TPM1_2",
        "TPM2_0"
      ]
    }
  }
},
{
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.ComputerSystem",
      "PciDevices": [
        {
          "VendorId": "0x8086",
          "DeviceId": "0x1234"
        }
      ],
      "DiscoveryState": "Basic",
      "ProcessorSockets": 8,
      "MemorySockets": 8,
      "PCIeConnectionId": [
        "XYZ1234567890"
      ],
      "UserModeEnabled": false,
      "TrustedExecutionTechnologyEnabled": false,
      "Metrics": {
        "@odata.id": "/redfish/v1/Systems/System1/Metrics"
      }
    }
  },
  "NetworkInterfaces": {
    "@odata.id": "/redfish/v1/Systems/System1/NetworkInterfaces"
  }
}
```

4.10.1.2 GET (PSME PCIe* Fabric)

This resource represents logical system containing PCIe* devices (no CPU or memory) and is excluded from PODM Composition.

Request:

```
GET /redfish/v1/Systems/{systemID}
Content-Type: application/json
```

Response:


```
{
  "@odata.context": "/redfish/v1/$metadata#ComputerSystem.ComputerSystem",
  "@odata.id": "/redfish/v1/Systems/System2",
  "@odata.type": "#ComputerSystem.v1_3_0.ComputerSystem",
```



```

    "Id": "System2",
    "Name": "My Computer System",
    "Description": "Description of server",
    "SystemType": "Physical",
    "AssetTag": "free form asset tag",
    "Manufacturer": "Manufacturer Name",
    "Model": "Model Name",
    "SKU": "SKU",
    "SerialNumber": "2M220100SL",
    "PartNumber": "Computer1",
    "UUID": "00000000-0000-0000-0000-000000000000",
    "HostName": null,
    "Status": {
        "State": "Enabled",
        "Health": "OK",
        "HealthRollup": "OK"
    },
    "IndicatorLED": null,
    "PowerState": "On",
    "Boot": {
        "@odata.type": "#ComputerSystem.v1_1_0.Boot",
        "BootSourceOverrideEnabled": "Disabled",
        "BootSourceOverrideTarget": "None",
        "BootSourceOverrideTarget@Redfish.AllowableValues": ["None"],
        "BootSourceOverrideMode": null,
        "BootSourceOverrideMode@Redfish.AllowableValues": []
    },
    "BiosVersion": null,
    "ProcessorSummary": {
        "Count": 0,
        "Model": null,
        "Status": {
            "State": null,
            "Health": null,
            "HealthRollup": null
        }
    },
    "MemorySummary": {
        "TotalSystemMemoryGiB": 0,
        "Status": {
            "State": null,
            "Health": null,
            "HealthRollup": null
        }
    },
    "Processors": {
        "@odata.id": "/redfish/v1/Systems/System2/Processors"
    },
    "EthernetInterfaces": {
        "@odata.id": "/redfish/v1/Systems/System2/EthernetInterfaces"
    },
    "SimpleStorage": {},
    "Storage": {
        "@odata.id": "/redfish/v1/Systems/System2/Storage"
    },
    "Memory": {
        "@odata.id": "/redfish/v1/Systems/System1/Memory"
    },
    "PCIeDevices": [
        {
            "@odata.id": "/redfish/v1/Chassis/PCIeSwitch1/PCIeDevices/Device1"
        }
    ]

```



```
    }
  ],
  "PCIeFunctions": [],
  "TrustedModules": [
  ],
  "Links": {
    "@odata.type": "#ComputerSystem.v1_2_0.Links",
    "Chassis": [{
      "@odata.id": "/redfish/v1/Chassis/4"
    }],
    "ManagedBy": [{
      "@odata.id": "/redfish/v1/Managers/1"
    }],
    "Endpoints": [
    ],
    "Oem": {
    }
  },
  "Actions": {
    "#ComputerSystem.Reset": {
      "target": "/redfish/v1/Systems/System1/Actions/ComputerSystem.Reset",
      "ResetType@Redfish.AllowableValues": ["On",
      "ForceOff",
      "GracefulShutdown",
      "ForceRestart",
      "Nmi",
      "GracefulRestart",
      "ForceOn",
      "PushPowerButton"]
    },
    "Oem": {
      "#Intel.Oem.StartDeepDiscovery": {
        "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDeepDiscovery"
      },
      "#Intel.Oem.StartDiscoveryOnDemand": {
        "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDiscoveryOnDemand"
      },
      "#Intel.Oem.ChangeTPMState": {
        "target":
"/redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.ChangeTPMState",
        "InterfaceType@Redfish.AllowableValues": [
          "TPM1_2",
          "TPM2_0"
        ]
      }
    }
  },
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.ComputerSystem",
    }
  },
  "PciDevices": [
    {
      "DiscoveryState": "Basic",
      "ProcessorSockets": null,
      "MemorySockets": null,
      "PCIeConnectionId": [
      ],
      "UserModeEnabled": false,
      "TrustedExecutionTechnologyEnabled": false,
      "Metrics": {
        "@odata.id": "/redfish/v1/Systems/System2/Metrics"
      }
    }
  ]
}
```



4.10.1.3 PUT

Operation is not allowed on this resource.

4.10.1.4 PATCH

The properties in [Table 8](#) can be updated by the PATCH operation:

Table 8. Properties Updated by Patch Operation

Attribute	Type	Required	Description
AssetTag	String	No	The user assigned asset tag for this system.
Boot	Object	No	Boot override properties, details in Table 9 .
UserModeEnabled	Boolean	No	Allows switching between user mode (firmware upgrade of system components disabled) and admin mode (firmware upgrade enabled).


[Table 9](#) describes the “Boot” properties that can be patched.

Table 9. Boot Override Update Properties

Attribute	Type	Required	Description
BootSourceOverrideEnabled	String	No	Describes the state of the Boot Source Override feature. Allowed values: “Disabled” - The system will boot as normal. “Once” - On its next boot cycle, the system will boot (one time) to the Boot Source Override Target. “Continuous” - The system will boot to the target specified in the BootSourceOverride Target until this property is set to Disabled.
BootSourceOverrideTarget	String	No	The current boot source to be used at next boot instead of the normal boot device, if BootSourceOverrideEnabled is true. Available values (refer to annotation @Redfish.AllowableValues for actual list of supported values): “None” - Boot from the normal boot device. “Pxe” - Boot from the Pre-Boot EXecution (PXE) environment. “Hdd” - Boot from a hard drive. “RemoteDrive” - Boot from a remote drive (e.g. iSCSI).
BootSourceOverrideMode	String	No	The BIOS Boot Mode (either Legacy or UEFI) to be used when BootSourceOverrideTarget boot source is booted from: “Legacy” - The system will boot in non-UEFI boot mode to the Boot Source Override Target. “UEFI” - The system will boot in UEFI boot mode to the Boot Source Override Target.

Request:

```
PATCH /redfish/v1/Systems/System1
Content-Type: application/json
{
    "Boot": {
        "BootSourceOverrideEnabled": "Once",
        "BootSourceOverrideTarget": "Pxe",
        "BootSourceOverrideMode": "UEFI"
    },
    "AssetTag": "Storage System",
}
```



```
"Oem": {
  "Intel_RackScale": {
    "UserModeEnabled": true
  }
}
```

Response:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

Or (when task is created):

```
HTTP/1.1 202 Accepted
Location: http://<IP:port>/redfish/v1/TaskService/Tasks/1/TaskMonitor
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": " New",
  "StartTime": "2016-09-01T04:45+01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```

4.10.1.5 POST

4.10.1.5.1 Reset Computer System:

Request:

```
POST /redfish/v1/Systems/System1/Actions/ComputerSystem.Reset
Content-Type: application/json
{
  "ResetType": "On"
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.10.1.5.2 Start Deep Discovery Process (PODM only)

This action is deprecated and may be removed in future version of service.

Request:

```
POST /redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDeepDiscovery
Content-Type: application/json
{
}
```

Response:

```
HTTP/1.1 204 No Content
```

Note: If `DeepDiscovery` process already started, or resource is allocated for composed node.

```
HTTP/1.1 409 Conflict
```



4.10.1.5.3 Start Discovery on Demand Process (PODM only)

This action is deprecated and may be removed in future version of service.

This action is used to trigger the discovery process on the PODM despite other discovery mechanisms (refresh assets inventory).

Request:

```
POST /redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.StartDiscoveryOnDemand
Content-Type: application/json
{
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.10.1.5.4 Change TPM State and/or Version:

This action typically can be applied to system during reset operation. Created task remains "InProgress" until reset action is triggered. [Table 10](#) describes the action parameters.

Table 10. Action Parameters

Attribute	Type	Required	Description
DeviceEnabled	Boolean	Yes	This defines the Trusted Platform Module (TPM) device state as a result of triggering this action.
InterfaceType	String (enum)	No	Required interface type of the TPM. Allowed values are defined in metadata <code>ComputerSystem.xml</code> Refer to <code>Redfish@AllowableValues</code> for service-supported types.
ClearOwnership	Boolean	No	This indicates if TPM ownership should be cleared.

Request:


```
POST /redfish/v1/Systems/System1/Actions/Oem/Intel.Oem.ChangeTPMState
Content-Type: application/json
{
  "DeviceEnabled": true,
  "InterfaceType": "TPM2_0",
  "ClearOwnership": true
}
```

Response:

```
HTTP/1.1 204 No Content
```

Or when task is created:

```
(header)
HTTP/1.1 202 Accepted
Location: http://<ip>:<port>/redfish/v1/TaskService/TaskMonitors/1
(body)
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": "New",
  "StartTime": "2016-09-01T04:45:01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```



4.10.1.6 DELETE

Operation is not allowed on this resource.

4.11 Computer System Metrics

Property details are available in `ComputerSystemMetrics.xml` metadata file.

4.11.1 Operations

4.11.1.1 GET

Request:

```
GET /redfish/v1/Systems/{systemID}/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#ComputerSystemMetricsComputerSystemMetrics",
  "@odata.id": "/redfish/v1/Systems/System1/Metrics",
  "@odata.type": "#ComputerSystemMetrics.v1_0_0.ComputerSystemMetrics",
  "Name": "Computer System Metrics for System1",
  "Description": "description-as-string",
  "Id": "Metrics for System1",
  "ProcessorBandwidthPercent": 17,
  "MemoryBandwidthPercent": 23,
  "MemoryThrottledCyclesPercent": 13,
  "ProcessorPowerWatt": 120,
  "MemoryPowerWatt": 48,
  "IOBandwidthGBps": 4,
  "Health": ["OK"]
}
```

4.11.1.2 PUT

Operation is not allowed on this resource.

4.11.1.3 PATCH

Operation is not allowed on this resource.

4.11.1.4 POST

Operation is not allowed on this resource.

4.11.1.5 DELETE

Operation is not allowed on this resource.

4.12 Processor Collection

Processor collection resource – provides collection of all processors available in a blade.



4.12.1 Operations

4.12.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/Processors
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ProcessorCollectionProcessorCollection",
  "@odata.id": "/redfish/v1/Systems/System1/Processors",
  "@odata.type": "#ProcessorCollection.ProcessorCollection",
  "Name": "Processors Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Systems/System1/Processors/CPU1"
    }
  ]
}
```

4.12.1.2 PUT

Operation is not allowed on this resource.

4.12.1.3 PATCH

Operation is not allowed on this resource.

4.12.1.4 POST

Operation is not allowed on this resource.

4.12.1.5 DELETE

Operation is not allowed on this resource.

4.13 Processor

Processor resource – provides detailed information about a single processor identified by {ProcessorID}.

Property details are available in `Processor.xml` metadata file. OEM extensions details are available in `IntelRackScaleOem.xml`.

4.13.1 Operations


4.13.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/Processors/{ProcessorID}
Content-Type: application/json
```

Response:

```
{
```



```
"@odata.context": "/redfish/v1/$metadata#Processor.Processor",
"@odata.id": "/redfish/v1/Systems/System1/Processors/CPU1",
"@odata.type": "#Processor.v1_0_0.Processor",
"Name": "Processor",
"Id": "CPU1",
"Socket": "CPU 1",
"ProcessorType": "CPU",
"ProcessorArchitecture": "x86",
"InstructionSet": "x86-64",
"Manufacturer": "Intel(R) Corporation",
"Model": "Multi-Core Intel(R) Xeon(R) processor 7xxx Series",
"ProcessorId": {
  "VendorId": "GenuineIntel",
  "IdentificationRegisters": "0x34AC34DC8901274A",
  "EffectiveFamily": "0x42",
  "EffectiveModel": "0x61",
  "Step": "0x1",
  "MicrocodeInfo": "0x429943"
},
"MaxSpeedMHz": 3700,
"TotalCores": 8,
"TotalThreads": 16,
"Status": {
  "State": "Enabled",
  "Health": "OK",
  "HealthRollup": null
},
"Oem": {
  "Intel_RackScale": {
    "@odata.type": "http://rsa.intel.com/Schema#RSA.Processor",
    "Brand": "E5",
    "Capabilities": [
      "sse",
      "sse2",
      "sse3"
    ],
    "OnPackageMemory": [
      {
        "Type": "L2Cache",
        "CapacityMB": 2,
        "SpeedMHz": null
      },
      {
        "Type": "L3Cache",
        "CapacityMB": 20,
        "SpeedMHz": null
      }
    ]
  },
  "ThermalDesignPowerWatt": 160,
  "Metrics": {
    "@odata.id": "/redfish/v1/Systems/System1/Processors/CPU1/Metrics"
  },
  "ExtendedIdentificationRegisters": {
    "EAX_00h": "0x0429943FFFFFFFFF",
    "EAX_01h": "0x0429943FFFFFFFFF",
    "EAX_02h": "0x0429943FFFFFFFFF",
    "EAX_03h": "0x0429943FFFFFFFFF",
    "EAX_04h": "0x0429943FFFFFFFFF",
    "EAX_05h": "0x0429943FFFFFFFFF",
    "EAX_07h": "0x0429943FFFFFFFFF",
    "EAX_80000000h": "0x0429943FFFFFFFFF",
    "EAX_80000001h": "0x0429943FFFFFFFFF",
```



```

        "EAX_80000002h": "0x0429943FFFFFFFFF",
        "EAX_80000003h": "0x0429943FFFFFFFFF",
        "EAX_80000004h": "0x0429943FFFFFFFFF",
        "EAX_80000005h": "0x0429943FFFFFFFFF",
        "EAX_80000006h": "0x0429943FFFFFFFFF",
        "EAX_80000007h": "0x0429943FFFFFFFFF",
        "EAX_80000008h": "0x0429943FFFFFFFFF"
    }
}
}
}

```

4.13.1.2 GET (FPGA)

Request:

```

GET /redfish/v1/Systems/System1/Processors/FPGA1
Content-Type: application/json


```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#Processor.Processor",
  "@odata.id": "/redfish/v1/Systems/System1/Processors/FPGA1",
  "@odata.type": "#Processor.v1_0_0.Processor",
  "Description": "description-as-string",
  "Name": "Accelerator",
  "Id": "FPGA1",
  "Socket": "CPU 1",
  "ProcessorType": "FPGA",
  "ProcessorArchitecture": "OEM",
  "InstructionSet": "OEM",
  "Manufacturer": "Intel(R) Corporation",
  "Model": "CPU Integrated FPGA Accelerator XYZ8008",
  "ProcessorId": {
    "VendorId": "GenuineIntel",
    "IdentificationRegisters": "0xDEADBEEF",
    "EffectiveFamily": "0xFF",
    "EffectiveModel": "0xAA",
    "Step": "0x1",
    "MicrocodeInfo": null
  },
  "MaxSpeedMHz": null,
  "TotalCores": 2,
  "TotalThreads": null,
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.Processor",
      "Brand": null,
      "Capabilities": [],
      "OnPackageMemory": [
        {
          "Type": "HBM2",
          "CapacityMB": 512,
          "SpeedMHz": 1066
        }
      ]
    },
    "ThermalDesignPowerWatt": 2.5,
  }
}

```



```
"FPGA": {
  "Type": "Integrated",
  "BitStreamVersion": "Blue1",
  "HSSICongfiguration": "4x10G",
  "HSSISideband": "I2C",
  "ReconfigurationSlots": 1
}
```

4.13.1.3 PUT

Operation is not allowed on this resource.

4.13.1.4 PATCH

Operation is not allowed on this resource.

4.13.1.5 POST

Operation is not allowed on this resource.

4.13.1.6 DELETE

Operation is not allowed on this resource.

4.14 Processor Metrics

Property details are available in `ProcessorMetrics.xml` metadata file.

4.14.1 Operations

4.14.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/Processors/CPU1/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ProcessorMetrics.ProcessorMetrics",
  "@odata.id": "/redfish/v1/Systems/System1/Processors/CPU1/Metrics",
  "@odata.type": "#ProcessorMetrics.v1_0_0.ProcessorMetrics",
  "Name": "ProcessorMetrics for CPU1",
  "Description": "description-as-string",
  "Id": "Metrics for CPU1",
  "AverageFrequencyMHz": 3014,
  "ThrottlingCelsius": 19,
  "TemperatureCelsius": 73,
  "ConsumedPowerWatt": 153,
  "Health": ["FRB1 BIST Failure", "Processor Throttled"]
}
```



4.14.1.2 PUT

Operation is not allowed on this resource.

4.14.1.3 PATCH

Operation is not allowed on this resource.

4.14.1.4 POST

Operation is not allowed on this resource.

4.14.1.5 DELETE

Operation is not allowed on this resource.

4.15 Memory Collection

Memory collection resource – provides collection of all memory modules installed in a computer system.

4.15.1 Operations

4.15.1.1 GET

Request:

```
GET /redfish/v1/Systems/{systemID}/Memory
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#MemoryCollection.MemoryCollection",
  "@odata.type": "#MemoryCollection.MemoryCollection",
  "@odata.id": "/redfish/v1/Systems/System1/Memory",
  "Name": "Memory Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Systems/System1/Memory/Dimm1"
    }
  ]
}
```

4.15.1.2 PUT


Operation is not allowed on this resource.

4.15.1.3 PATCH

Operation is not allowed on this resource.

4.15.1.4 POST

Operation is not allowed on this resource.



4.15.1.5 DELETE

Operation is not allowed on this resource.

4.16 Memory

Memory resource – provides detailed information about a single memory module identified by {memoryID}.

Properties' details are available in the `Memory.xml` metadata file. OEM extensions details available in `IntelRackScaleOem.xml`.

4.16.1 Operations

4.16.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/Memory/{MemoryID}
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Memory.Memory",
  "@odata.id": "/redfish/v1/Systems/System1/Memory/Dimm1",
  "@odata.type": "#Memory.v1_1_0.Memory",
  "Name": "DIMM",
  "Id": "Dimm1",
  "MemoryType": "DRAM",
  "MemoryDeviceType": "DDR4",
  "BaseModuleType": "LRDIMM",
  "MemoryMedia": [
    "DRAM"
  ],
  "CapacityMiB": 16384,
  "DataWidthBits": 64,
  "BusWidthBits": 72,
  "Manufacturer": "Contoso",
  "SerialNumber": "1A2B3B",
  "PartNumber": "1A2B3D",
  "AllowedSpeedsMHz": [
    2133,
    2400,
    2667
  ],
  "FirmwareRevision": "RevAbc",
  "FirmwareApiVersion": "ApiAbc",
  "FunctionClasses": [
    "Volatile"
  ],
  "VendorID": "vendorX",
  "DeviceID": "deviceX",
  "RankCount": 1,
  "DeviceLocator": "PROC 1 DIMM 1",
  "MemoryLocation": {
    "Socket": 1,
    "MemoryController": 1,
    "Channel": 1,
    "Slot": 1
  },
}
```



```

    "ErrorCorrection": "MultiBitECC",
    "Status": {
        "State": "Enabled",
        "Health": "OK",
        "HealthRollup": null
    },
    "OperatingSpeedMhz": 2400,
    "Regions": [{
        "RegionId": "1",
        "MemoryClassification": "Volatile",
        "OffsetMiB": 0,
        "SizeMiB": 16384,
    }],
    "OperatingMemoryModes": [
        "Volatile"
    ],
    "Metrics": {
        "@odata.id": "/redfish/v1/Systems/System1/Memory/Dimm1/Metrics"
    },
    "Oem": {
        "Intel_RackScale": {
            "@odata.type": "#Intel.Oem.Memory",
            "VoltageVolt": 1.35
        }
    },
    "MaxTDPMilliWatts": [ 5000 ]
}

```

4.16.1.2 PUT

Operation is not allowed on this resource.

4.16.1.3 PATCH

Operation is not allowed on this resource.

4.16.1.4 POST

Operation is not allowed on this resource.


4.16.1.5 DELETE

Operation is not allowed on this resource.

4.17 Memory Metrics

Property details are available in [MemoryMetrics.xml](#) metadata file for official Redfish Memory Metrics and [IntelRackScaleOem.xml](#) file for Intel® RSD extensions for Memory Metrics.

Note: The current version of Intel® RSD does not implement all memory metrics. Currently implemented metrics are annotated as “Required in metadata”. Third Party PSME implementations may choose a bigger memory metric set for implementation based on capabilities on underlying hardware/firmware.



4.17.1 Operations

4.17.1.1 GET

Request:

```
GET /redfish/v1/Systems/3/Memory/Dimm1/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Systems/Members/1/Memory/Metrics/$entity",
  "@odata.id": "/redfish/v1/Systems/3/Memory/Dimm1/Metrics",
  "@odata.type": "#MemoryMetrics.v1_0_0.MemoryMetrics",
  "Name": "Memory Metrics for DIMM1",
  "Description": "description-as-string",
  "Id": "Metrics for DIMM1",
  "Oem": {
    "Intel_RackScale": {
      "TemperatureCelsius": 46,
      "Health": ["OK"]
    }
  }
}
```

4.17.1.2 PUT

Operation is not allowed on this resource.

4.17.1.3 PATCH

Operation is not allowed on this resource.

4.17.1.4 POST

Operation is not allowed on this resource.

4.17.1.5 DELETE

Operation is not allowed on this resource.

4.18 Storage Subsystem Collection

Storage subsystem collection resource – provides collection of all storage subsystems available in a computer system.

Details of this resource are described in metadata file: [StorageCollection.xml](#)

4.18.1 Operations

4.18.1.1 GET

Request:

```
GET /redfish/v1/Systems/{systemID}/Storage
Content-Type: application/json
```

**Response:**

```
{
  "@odata.context": "/redfish/v1/$metadata#StorageCollection.StorageCollection",
  "@odata.id": "/redfish/v1/Systems/1/Storage",
  "@odata.type": "#StorageCollection.StorageCollection",
  "Name": "Storage Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Systems/3/Storage/SATA"
    }
  ]
}
```

4.18.1.2 PUT

Operation is not allowed on this resource.

4.18.1.3 PATCH

Operation is not allowed on this resource.

4.18.1.4 POST

Operation is not allowed on this resource.

4.18.1.5 DELETE

Operation is not allowed on this resource.

4.19 Storage Subsystem

Storage subsystem resource – provides detailed information about a single storage subsystem identified by the {storageID}.

Details of this resource are described in metadata file: `Storage.xml`

4.19.1 Operations**4.19.1.1 GET****Request:**

```
GET /redfish/v1/Systems/{systemID}/Storage/{storageID}
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Storage.Storage",
  "@odata.id": "/redfish/v1/Systems/1/Storage/SATA",
  "@odata.type": "#Storage.v1_1_0.Storage",
  "Id": "1",
  "Name": "SATA Storage System",
  "Description": "System SATA",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
  }
}
```

```

    "HealthRollup": "OK"
  },
  "StorageControllers": [
    {
      "@odata.id": "/redfish/v1/Systems/1/Storage/SATA#/StorageControllers/0",
      "@odata.type": "#Storage.v1_1_0.StorageController",
      "MemberId": "0",
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      },
      "Manufacturer": "ManufacturerName",
      "Model": "ProductModelName",
      "SKU": "",
      "SerialNumber": "2M220100SL",
      "PartNumber": "",
      "AssetTag": "CustomerWritableThingy",
      "SpeedGbps": 6,
      "FirmwareVersion": null,
      "SupportedControllerProtocols": [
        "PCIe"
      ],
      "SupportedDeviceProtocols": [
        "SATA"
      ],
      "Identifiers": [
        {
          "DurableName": "123e4567-e89b-12d3-a456-426655440000",
          "DurableNameFormat": "UUID"
        }
      ],
      "Links": {
        "Endpoints": []
      }
    }
  ],
  "Drives": [
    {
      "@odata.id": "/redfish/v1/Chassis/Blade1/Drives/Disk1"
    }
  ],
  "Volumes": {
    "@odata.id": "/redfish/v1/Systems/1/Storage/SATA/Volumes"
  },
  "Links": {
    "Enclosures": [
      {
        "@odata.id": "/redfish/v1/Chassis/Blade1"
      }
    ]
  },
  "Actions": {}
}

```

4.19.1.2 PUT

Operation is not allowed on this resource.

4.19.1.3 PATCH

Operation is not allowed on this resource.

4.20 Volume Collection

Volume collection resource – provides collection of all storage volumes available in a storage subsystem.

Details of this resource are described in metadata file: [VolumeCollection.xml](#)



4.20.1 Operations

4.20.1.1 GET

Request:

```
GET /redfish/v1/Systems/1/Storage/SATA/VolumesCollection
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#VolumeCollection.VolumeCollection",
  "@odata.id": "/redfish/v1/Systems/1/Storage/SATA/Volumes",
  "@odata.type": "#VolumeCollection.VolumeCollection",
  "Name": "Storage Volume Collection",
  "Description": "Storage Volume Collection",
  "Members@odata.count": 0,
  "Members": [
  ],
  "Oem": {}
}
```

4.20.1.2 PUT

Operation is not allowed on this resource.

4.20.1.3 PATCH

Operation is not allowed on this resource.

4.20.1.4 POST

Operation is not allowed on this resource.

4.20.1.5 DELETE

Operation is not allowed on this resource.

4.21 Drive

Drive contains properties describing a single physical disk drive for any system.

Details of this resource are described in metadata file: [Drive.xml](#) OEM extensions details available in [IntelRackScaleOem.xml](#).


The Intel® RSD OEM section contains [EraseOnDetach](#) property, which is handled by PODM. If exposed on PSME it does not provide any function thus it is recommended to keep it read-only with value **null**.

4.21.1 Operations

4.21.1.1 GET

Request:

```
GET "/redfish/v1/Chassis/Blade1/Drives/1"
Content-Type: application/json
```

**Response:**

```
{
  "@odata.context": "/redfish/v1/$metadata#Drive.Drive",
  "@odata.id": "/redfish/v1/Chassis/Blade1/Drives/1",
  "@odata.type": "#Drive.v1_1_1.Drive",
  "Id": "1",
  "Name": "Drive",
  "Description": "Drive description string",
  "IndicatorLED": "Lit",
  "Model": "Drive Model string",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "CapacityBytes": 899527000000,
  "Protocol": "SATA",
  "MediaType": "SSD",
  "Manufacturer": "Intel",
  "SerialNumber": "72D0A037FRD27",
  "PartNumber": "SG0GP8811253178M02GJA00",
  "SKU": "SKU version",
  "StatusIndicator": "OK",
  "Revision": "revision string",
  "FailurePredicted": false,
  "AssetTag": null,
  "CapableSpeedGbs": 6,
  "NegotiatedSpeedGbs": 6,
  "Location": [{
    "Info": "4",
    "InfoFormat": "Hdd index"
  }],
  "Identifiers": [
    {
      "DurableName": "123e4567-e89b-12d3-a456-426655440000",
      "DurableNameFormat": "UUID"
    }
  ],
  "HotspareType": null,
  "EncryptionAbility": null,
  "EncryptionStatus": null,
  "RotationSpeedRPM": null,
  "BlockSizeBytes": null,
  "PredictedMediaLifeLeftPercent": null,
  "Links": {
    "@odata.type": "#Drive.v1_2_0.Links",
    "Volumes": [],
    "Endpoints": [],
    "Oem": {
    }
  },
  "Actions": {
    "#Drive.SecureErase": {
      "target": "/redfish/v1/Chassis/Blade1/Drives/1/Actions/Drive.SecureErase"
    }
  },
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.Drive",
      "EraseOnDetach": null,
      "FirmwareVersion": "1.17",

```



```

        "DriveErased": true,
        "Storage": {"@odata.id": "/redfish/v1/Systems/1/Storage/NVMe"},
        "PCIeFunction": {"@odata.id":
"/redfish/v1/Chassis/1/PCIeDevices/Device1/Functions/1"}
    }
}

```

4.21.1.2 PUT

Operation is not allowed on this resource.

4.21.1.3 PATCH

The properties in [Table 11](#) can be updated by the PATCH operation:

Table 11. Properties Updated by PATCH Operation

Attribute	Type	Required	Description
AssetTag	String	No	The user assigned asset tag for this drive.
Oem	Object	No	Within "Intel_RackScale" object following properties are PATCH-able: "EraseOnDetach" – property can be updated on PODM (PODM). It indicates if drive should be erased when detached from Composed Node. "DriveErased" – property used to indicate whether drive was cleared after assignment to composed node.

Request:

```

PATCH /redfish/v1/Chassis/Blade1/Drives/1
Content-Type: application/json
{
    "AssetTag": "TemporaryStorage",
    "Oem": {
        "Intel_RackScale": {
            "EraseOnDetach": true,
            "DriveErased": false
        }
    }
}

```

Response:

```
HTTP/1.1 204 No Content
```

Or:

```

HTTP/1.1 200 OK
{
    (updated resource body as in 4.21.1.1)
}

```

4.21.1.4 POST

POST action is used to [SecureErase](#) drives. If this operation is not immediate, Status->State of resource should be changed to "Starting". This action works only on drives currently not assigned to any zone.

```

POST /redfish/v1/Chassis/Blade1/Drives/1/Actions/Drive.SecureErase
Content-Type: application/json
{}

```

Response:

```
HTTP/1.1 204 No Content
```

Or (when task is created)

```
HTTP/1.1 202 Accepted
Location: http://<ip>:<port>/redfish/v1/TaskService/TaskMonitors/1
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": " New",
  "StartTime": "2016-09-01T04:45+01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```

4.21.1.5 DELETE

Operation is not allowed on this resource.

4.22 System Network Interface

Blade Network Interface resource – provides detailed information about a network interface identified by {*nicID*}.

Details of this resource are described in metadata file: [EthernetInterface.xml](#) OEM extensions details available in [IntelRackScaleOem.xml](#).

4.22.1 Operations

4.22.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/EthernetInterfaces/LAN1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#EthernetInterface.EthernetInterface",
  "@odata.id": "/redfish/v1/Systems/System1/EthernetInterfaces/LAN1",
  "@odata.type": "#EthernetInterface.v1_1_0.EthernetInterface",
  "Id": "LAN1",
  "Name": "Ethernet Interface",
  "Description": "System NIC 1",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "InterfaceEnabled": true,
  "PermanentMACAddress": "AA:BB:CC:DD:EE:FF",
  "MACAddress": "AA:BB:CC:DD:EE:FF",
  "SpeedMbps": 100,
  "AutoNeg": true,
  "FullDuplex": true,
  "MTUSize": 1500,
  "HostName": "web483",
  "FQDN": "web483.redfishspecification.org",
  "IPv6DefaultGateway": "fe80::3ed9:2bff:fe34:600",
  "MaxIPv6StaticAddresses": null,
  "NameServers": [
  ]
}
```



```

    "names.redfishspecification.org"
  ],
  "IPv4Addresses": [
    {
      "Address": "192.168.0.10",
      "SubnetMask": "255.255.252.0",
      "AddressOrigin": "Static",
      "Gateway": "192.168.0.1"
    }
  ],
  "IPv6Addresses": [
    {
      "Address": "fe80::1ec1:deff:fe6f:1e24",
      "PrefixLength": 64,
      "AddressOrigin": "Static",
      "AddressState": "Preferred"
    }
  ],
  "IPv6StaticAddresses": [
  ],
  "VLAN": null,
  "VLANs": null,

  "Oem": {
    "Intel_RackScale" : {
      "@odata.type" : "#Intel.Oem.EthernetInterface",
      "SupportedProtocols": [
        "RoCEv2",
        "iWARP",
        "iSCSI"
      ]
    }
  }

  "Links" : {
    "Oem" : {
      "Intel_RackScale" : {
        "@odata.type" : "#Intel.Oem.EthernetInterfaceLinks",
        "NeighborPort" : {
          "@odata.id" : "/redfish/v1/EthernetSwitches/1/Ports/1"
        },
      },
    }
  }
}

```

4.22.1.2 PUT


Operation is not allowed on this resource.

4.22.1.3 PATCH

Operation is not allowed on this resource.

4.22.1.4 POST

Operation is not allowed on this resource.



4.22.1.5 DELETE

Operation is not allowed on this resource.

4.23 Manager Collection

Manager collection resource – provides collection of all managers available in a drawer.

4.23.1 Operations

4.23.1.1 GET

Request:

```
GET /redfish/v1/Managers
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ManagerCollection.ManagerCollection",
  "@odata.id": "/redfish/v1/Managers",
  "@odata.type": "#ManagerCollection.ManagerCollection",
  "Name": "Manager Collection",
  "Description": "description-as-string",
  "Members@odata.count": 3,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Managers/BMC1"
    },
    {
      "@odata.id": "/redfish/v1/Managers/BMC2"
    },
    {
      "@odata.id": "/redfish/v1/Managers/PSME"
    }
  ]
}
```

4.23.1.2 PUT

Operation is not allowed on this resource.

4.23.1.3 PATCH

Operation is not allowed on this resource.

4.23.1.4 POST

Operation is not allowed on this resource.

4.23.1.5 DELETE

Operation is not allowed on this resource.



4.24 Manager

The manager is a systems management entity, which may implement or provide access to a Redfish service. Examples of managers are Baseboard Management Controllers (BMCs), Enclosure Managers, Management Controllers, and other subsystems assigned manageability functions. There may be multiple Managers in implementation, and they may, or may not, be directly accessible via a Redfish-defined interface.

Details about the resource properties are found in the metadata file: [Manager.xml](#) OEM extensions details are available in [IntelRackScaleOem.xml](#).

4.24.1 Operations

4.24.1.1 GET

Request:

```
GET /redfish/v1/Managers/PSME
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Manager.Manager",
  "@odata.id": "/redfish/v1/Managers/PSME",
  "@odata.type": "#Manager.v1_2_0.Manager",
  "Id": "1",
  "Name": "Manager",
  "ManagerType": "BMC",
  "Description": "BMC",
  "ServiceEntryPointUUID": "92384634-2938-2342-8820-489239905423",
  "UUID": "00000000-0000-0000-0000-000000000000",
  "Model": "Joo Janta 200",
  "DateTime": "2015-03-13T04:14:33+06:00",
  "DateTimeLocalOffset": "+06:00",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "GraphicalConsole": {
    "ServiceEnabled": true,
    "MaxConcurrentSessions": 2,
    "ConnectTypesSupported": ["KVMIP"]
  },
  "SerialConsole": {
    "ServiceEnabled": true,
    "MaxConcurrentSessions": 1,
    "ConnectTypesSupported": ["Telnet",
    "SSH",
    "IPMI"]
  },
  "CommandShell": {
    "ServiceEnabled": true,
    "MaxConcurrentSessions": 4,
    "ConnectTypesSupported": ["Telnet",
    "SSH"]
  },
  "FirmwareVersion": "1.00",
  "NetworkProtocol": {
    "@odata.id": "/redfish/v1/Managers/PSME/NetworkProtocol"
```

```

    },
    "EthernetInterfaces": {
        "@odata.id": "/redfish/v1/Managers/PSME/EthernetInterfaces"
    },
    "Links": {
        "@odata.type": "#Manager.v1_1_0.Links"
        "ManagerForServers": [],
        "ManagerForChassis": [{
            "@odata.id": "/redfish/v1/Chassis/FabricModule1"
        }],
        "ManagerInChassis": {
            "@odata.id": "/redfish/v1/Chassis/Drawer1"
        },
        "Oem": {
            "Intel_RackScale": {
                "@odata.type": "#Intel.Oem.ManagerLinks",
                "ManagerForServices": [{
                    "@odata.id":
"/redfish/v1/Services/RSS1"
                }],
                "ManagerForSwitches": []
            }
        },
        "Oem": {},
        "PowerState": "On",
        "Actions": {
            "#Manager.Reset": {
                "target": "/redfish/v1/Managers/PSME/Actions/Manager.Reset",
                "ResetType@Redfish.AllowableValues": [
                ]
            },
            "Oem": {}
        }
    }
}

```

4.24.1.2 PUT

Operation is not allowed on this resource.

4.24.1.3 PATCH

Operation is not allowed on this resource.

4.24.1.4 POST

Operation is not allowed on this resource.

4.24.1.5 DELETE

Operation is not allowed on this resource.

4.25 Ethernet Switch Collection

Ethernet Switch collection resource – provides collection of all switches available in a fabric module.



4.25.1 Operations

4.25.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchesCollection.EthernetSwitchesCollection",
  "@odata.id": "/redfish/v1/EthernetSwitches",
  "@odata.type": "#EthernetSwitchesCollection.EthernetSwitchesCollection",
  "Name": "Ethernet Switches Collection",
  "Description": "Network Switches Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/EthernetSwitches/Switch1"
    }
  ]
}
```

4.25.1.2 PUT

Operation is not allowed on this resource.

4.25.1.3 PATCH

Operation is not allowed on this resource.

4.25.1.4 POST

Operation is not allowed on this resource.

4.25.1.5 DELETE

Operation is not allowed on this resource.

4.26 Ethernet Switch

Ethernet Switch resource – provides detailed information about a switch identified by {switchID}.

Detailed info about these resource properties can be obtained from metadata file: [EthernetSwitch.xml](#)


4.26.1 Operations

4.26.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1
Content-Type: application/json
```

Response:



```
{
  "@odata.context": "/redfish/v1/$metadata#EthernetSwitch.EthernetSwitch",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1",
  "@odata.type": "#EthernetSwitch.v1_1_0.EthernetSwitch",
  "Id": "Switch1",
  "SwitchId": "unique switch id",
  "Name": "Switch1",
  "Description": "description-as-string",
  "Manufacturer": "Quanta",
  "Model": "ly8_rangley",
  "ManufacturingDate": "02/21/2015 00:00:00",
  "SerialNumber": "2M220100SL",
  "PartNumber": "1LY8UZZ0007",
  "FirmwareName": "ONIE",
  "FirmwareVersion": "1.1",
  "Role": "TOR",
  "MaxACLNumber": 4,
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "Oem": {},
  "Ports": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports"
  },
  "ACLs": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs"
  },
  "Metrics": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Metrics"
  },
  "Links": {
    "Chassis": {
      "@odata.id": "/redfish/v1/Chassis/FabricModule1"
    },
    "ManagedBy": [
      {
        "@odata.id": "/redfish/v1/Managers/PSME"
      }
    ],
    "Oem": {}
  },
  "LLDPEnabled": true,
  "ETSEnabled": true,
  "DCBXEnabled": true,
  "PriorityFlowControl": {
    "Enabled": true,
    "LosslessPriorities": [0, 1, 6, 7]
  },
  "TrafficClassification": [
    {
      "TrafficClass": 1,
      "Protocol": "UDP",
      "Port": 4791
    },
    {
      "TrafficClass": 2,
      "Protocol": "TCP",
      "Port": 860
    }
  ]
}
```



```

        "TrafficClass": 2,
        "Protocol": "TCP",
        "Port": 3260
    }
],
"ClassToPriorityMapping": [
    {
        "TrafficClass": 1,
        "Priority": 5
    },
    {
        "TrafficClass": 2,
        "Priority": 5
    }
],
"PriorityToClassMapping": [
    {
        "Priority": 5,
        "TrafficClass": 1
    },
    {
        "Priority": 6,
        "TrafficClass": 2
    }
],
"TransmissionSelection": [
    {
        "TrafficClass": 1,
        "BandwidthPercent": 60
    },
    {
        "TrafficClass": 2,
        "BandwidthPercent": 30
    }
]
}

```

4.26.1.2 PUT


Operation is not allowed on this resource.

4.26.1.3 PATCH

The properties in [Table 13](#) can be updated by the PATCH operation:

Table 12. Properties Updated by Patch Operation

Attribute	Type	Required	Description												
LLDPEnabled	Boolean	No	Enables Link Layer Discovery Protocol for this switch (globally).												
ETSEnabled	Boolean	No	Enables Enhanced Transmission Scheduling for this switch.												
PriorityFlowControl	Object	No	Configures Priority flow control for this switch: <table> <tr> <th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr> <tr> <td>Enabled</td><td>Boolean</td><td>No</td><td>Globally enables PFC for switch.</td></tr> <tr> <td>LosslessPriorities</td><td>Array of Int64</td><td>No</td><td>Identifiers of priorities that can't be dropped.</td></tr> </table>	Attribute	Type	Required	Description	Enabled	Boolean	No	Globally enables PFC for switch.	LosslessPriorities	Array of Int64	No	Identifiers of priorities that can't be dropped.
Attribute	Type	Required	Description												
Enabled	Boolean	No	Globally enables PFC for switch.												
LosslessPriorities	Array of Int64	No	Identifiers of priorities that can't be dropped.												



Attribute	Type	Required	Description																
TrafficClassification	Object	No	Configures mapping of traffic to Traffic Class: <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>TrafficClass</td><td>Int64</td><td>Yes</td><td>Id of Traffic Class to which this traffic should be mapped.</td></tr><tr><td>Protocol</td><td>String (enum)</td><td>Yes</td><td>Protocol of traffic. Available values: "TCP" "UDP"</td></tr><tr><td>Port</td><td>Int64</td><td>Yes</td><td>Port on which this traffic runs.</td></tr></table>	Attribute	Type	Required	Description	TrafficClass	Int64	Yes	Id of Traffic Class to which this traffic should be mapped.	Protocol	String (enum)	Yes	Protocol of traffic. Available values: "TCP" "UDP"	Port	Int64	Yes	Port on which this traffic runs.
Attribute	Type	Required	Description																
TrafficClass	Int64	Yes	Id of Traffic Class to which this traffic should be mapped.																
Protocol	String (enum)	Yes	Protocol of traffic. Available values: "TCP" "UDP"																
Port	Int64	Yes	Port on which this traffic runs.																
ClassToPriorityMapping	Object	No	Configures mapping Traffic Class to Traffic Priority <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>TrafficClass</td><td>Int64</td><td>Yes</td><td>Identifier of Traffic Class</td></tr><tr><td>Priority</td><td>Int64</td><td>Yes</td><td>Identifier of Priority for PFC</td></tr></table>	Attribute	Type	Required	Description	TrafficClass	Int64	Yes	Identifier of Traffic Class	Priority	Int64	Yes	Identifier of Priority for PFC				
Attribute	Type	Required	Description																
TrafficClass	Int64	Yes	Identifier of Traffic Class																
Priority	Int64	Yes	Identifier of Priority for PFC																
PriorityToClassMapping	Object	No	Configures mapping Traffic Priority to Traffic Class <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>TrafficClass</td><td>Int64</td><td>Yes</td><td>Identifier of Traffic Class</td></tr><tr><td>Priority</td><td>Int64</td><td>Yes</td><td>Identifier of Priority for PFC</td></tr></table>	Attribute	Type	Required	Description	TrafficClass	Int64	Yes	Identifier of Traffic Class	Priority	Int64	Yes	Identifier of Priority for PFC				
Attribute	Type	Required	Description																
TrafficClass	Int64	Yes	Identifier of Traffic Class																
Priority	Int64	Yes	Identifier of Priority for PFC																
TransmissionSelection	Object	No	Configures bandwidth for different Traffic Classes for ETS <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>TrafficClass</td><td>Int64</td><td>Yes</td><td>Identifier of Traffic Class</td></tr><tr><td>BandwidthPercent</td><td>Int64</td><td>Yes</td><td>Guaranteed minimal bandwidth for this Traffic Class.</td></tr></table>	Attribute	Type	Required	Description	TrafficClass	Int64	Yes	Identifier of Traffic Class	BandwidthPercent	Int64	Yes	Guaranteed minimal bandwidth for this Traffic Class.				
Attribute	Type	Required	Description																
TrafficClass	Int64	Yes	Identifier of Traffic Class																
BandwidthPercent	Int64	Yes	Guaranteed minimal bandwidth for this Traffic Class.																

4.26.1.4 DELETE

Operation is not allowed on this resource.

4.26.1.5 POST

Operation is not allowed on this resource.

4.26.1.6 DELETE

Operation is not allowed on this resource.

4.27 Ethernet Switch Metrics

Property details are available in [EthernetSwitchMetrics.xml](#) metadata file.

Note: The current version of Intel RSD does not implement Ethernet switch metrics.



4.27.1 Operations

4.27.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchMetrics.EthernetSwitchMetrics",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Metrics",
  "@odata.type": "#EthernetSwitchMetrics.v1_0_0.EthernetSwitchMetrics",
  "Name": "EthernetSwitch Metrics for Switch1",
  "Description": "description-as-string",
  "Id": "Metrics for Switch1",
  "Health": "OK"
}
```

4.27.1.2 PUT

Operation is not allowed on this resource.

4.27.1.3 PATCH

Operation is not allowed on this resource.

4.27.1.4 POST

Operation is not allowed on this resource.

4.27.1.5 DELETE

Operation is not allowed on this resource.

4.28 Ethernet Switch Port Collection

The Ethernet Switch port collection resource – provides a collection of all switch ports available in a switch.

4.28.1 Operations

4.28.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchPortCollection.EthernetSwitchPortCollection",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports",
  "@odata.type": "#EthernetSwitchPortCollection.EthernetSwitchPortCollection",
}
```

```

    "Name": "Ethernet Switch Port Collection",
    "Description": "Switch Port Collection",
    "Members@odata.count": 1,
    "Members": [
      {
        "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1"
      }
    ]
  }
}

```

4.28.1.2 PUT

Operation is not allowed on this resource.

4.28.1.3 PATCH

Operation is not allowed on this resource.

4.28.1.4 POST

Request:

```

POST /redfish/v1/EthernetSwitches/Switch1/Ports
Content-Type: application/json
{
  "PortId": "Lag1",
  "PortMode": "LinkAggregationStatic",
  "Links": {
    "PortMembers": [
      {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port10"
      },
      {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port11"
      }
    ]
  }
}

```

Response:

```

HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/EthernetSwitches/Switch1/Ports/Lag1

```

4.28.1.5 DELETE

Operation is not allowed on this resource.

4.29 Ethernet Switch Port

Ethernet Switch port resource – provides detailed information about a switch port identified by {portID}.

The Ethernet Switch port collection resource – provides a collection of all switch ports available in a switch.



4.29.1 Operations

4.29.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchPort.EthernetSwitchPort",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1",
  "@odata.type": "#EthernetSwitchPort.v1_1_0.EthernetSwitchPort",
  "Id": "Port1",
  "Name": "RSA Switch Port",
  "Description": "description-as-string",
  "PortId": "sw0p10",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "LinkType": "Ethernet",
  "OperationalState": "Up",
  "AdministrativeState": "Up",
  "LinkSpeedMbps": 10000,
  "NeighborInfo": {
    "SwitchId": "unique switch id",
    "PortId": "11",
    "CableId": "CustomerWritableThing"
  },
  "NeighborMAC": "00:11:22:33:44:55",
  "FrameSize": 1520,
  "Autosense": true,
  "FullDuplex": true,
  "MACAddress": "2c:60:0c:72:e6:33",
  "IPv4Addresses": [{
    "Address": "192.168.0.10",
    "SubnetMask": "255.255.252.0",
    "AddressOrigin": "Static",
    "Gateway": "192.168.0.1"
  }],
  "IPv6Addresses": [{
    "Address": "fe80::1ec1:deff:fe6f:1e24",
    "PrefixLength": 64,
    "AddressOrigin": "Static",
    "AddressState": "Preferred"
  }],
  "PortClass": "Logical",
  "PortMode": "LinkAggregationStatic",
  "PortType": "Upstream",
  "Oem": {
  },
  "VLANs": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs"
  },
  "StaticMACs": {
    "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs"
  }
}
```



```
    },
    "Metrics": {
      "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/Metrics"
    },
    "Links": {
      "@odata.type": "#EthernetSwitchPort.v1_1_0.Links",
      "PrimaryVLAN": {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN1"
      },
      "Switch": {
        "@odata.id": "/redfish/v1/EthernetSwitches/Switch1"
      },
      "MemberOfPort": {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/LAG1"
      },
      "PortMembers": [],
      "ActiveACLs": [{
        "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1"
      }]
    },
    "NeighborInterface": {
      "@odata.id":
"/redfish/v1/Systems/System1/EthernetInterfaces/LAN1"
    },
    "PFCEnabled": true,
    "DCBXState": "Disabled",
    "LLDPEnabled": true
  }
}
```

4.29.1.2 PUT

Operation is not allowed on this resource.

4.29.1.3 PATCH

The properties in [Table 13](#) can be updated by the PATCH operation:

Table 13. Properties Updated by Patch Operation

Attribute	Type	Required	Description															
AdministrativeState	String (enum)	No	Port link state forced by user. Allowed values: "Up" "Down"															
LinkSpeedMbps	Number	No	Port speed in Mbps															
FrameSize	Number	No	MAC frame size in bytes															
Autosense	Boolean	No	Indicates if the speed and duplex is automatically configured.															
Links	Object	No	<table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>PrimaryVLAN</td><td>Reference</td><td>No</td><td>Link to VLAN resource that should be primary for this port</td></tr><tr><td>PortMembers</td><td>Array of References</td><td>No</td><td>List of ports being members of this logical port</td></tr></table>				Attribute	Type	Required	Description	PrimaryVLAN	Reference	No	Link to VLAN resource that should be primary for this port	PortMembers	Array of References	No	List of ports being members of this logical port
			Attribute	Type	Required	Description												
			PrimaryVLAN	Reference	No	Link to VLAN resource that should be primary for this port												
PortMembers	Array of References	No	List of ports being members of this logical port															
FullDuplex	Boolean	No	Enables full duplex mode.															




Attribute	Type	Required	Description																
MACAddress	String	No	MAC address of port.																
IPv4Addresses	Array of objects	No	Array of IP addresses of this port in following format: <table> <tr> <th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr> <tr> <td>Address</td><td>String</td><td>Yes</td><td>IP v4 address</td></tr> <tr> <td>SubnetMask</td><td>String</td><td>No</td><td>Subnet mask</td></tr> <tr> <td>Gateway</td><td>String</td><td>No</td><td>IPv4 gateway for this address</td></tr> </table>	Attribute	Type	Required	Description	Address	String	Yes	IP v4 address	SubnetMask	String	No	Subnet mask	Gateway	String	No	IPv4 gateway for this address
Attribute	Type	Required	Description																
Address	String	Yes	IP v4 address																
SubnetMask	String	No	Subnet mask																
Gateway	String	No	IPv4 gateway for this address																
IPv6Addresses	Array of objects	No	Array of IP addresses of this port in following format: <table> <tr> <th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr> <tr> <td>Address</td><td>String</td><td>Yes</td><td>IP address in v6 format</td></tr> <tr> <td>PrefixLength</td><td>Number</td><td>No</td><td>Provides the IPv6 network prefix length in bits for this address</td></tr> </table>	Attribute	Type	Required	Description	Address	String	Yes	IP address in v6 format	PrefixLength	Number	No	Provides the IPv6 network prefix length in bits for this address				
Attribute	Type	Required	Description																
Address	String	Yes	IP address in v6 format																
PrefixLength	Number	No	Provides the IPv6 network prefix length in bits for this address																
PFCEnabled	Boolean	No	Enables Priority Flow Control for this port																
DCBXState	String (enum)	No	Sets Data Center Bridging Exchange TLV format. Allowable values: "Disabled" "EnabledIEEE" "EnabledCEE"																
LLDPEnabled	Boolean	No	Enables Link Layer Discovery Protocol for this port.																

Request:

```
PATCH /redfish/v1/EthernetSwitches/Switch1/Ports/Port1
Content-Type: application/json
{
  "AdministrativeState": "Up",
  "LinkSpeedMbps": 1000,
  "FrameSize": 1500,
  "Autosense": false,
  "Links": {
    "PrimaryVLAN": {
      "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN1"
    },
    "PortMembers": [
      {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port10"
      },
      {
        "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port12"
      }
    ]
  },
  "PFCEnabled": true,
  "DCBXState": "Disabled",
  "LLDPEnabled": true
}
```

Response:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```



Or:

```
HTTP/1.1 204 No Content
```

Or (when task is created):

```
HTTP/1.1 202 Accepted
Location: http://<IP:port>/redfish/v1/TaskService/Tasks/1/TaskMonitor
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": "New",
  "StartTime": "2016-09-01T04:45+01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```

Note: `PortMembers` array is an optional parameter. If not present in the PATCH request, a list of port members does not change.

4.29.1.4 POST

Operation is not allowed on this resource.

4.29.1.5 DELETE

Request:

```
DELETE /redfish/v1/EthernetSwitches/Switch1/Ports/Lag1
```

Response:

```
HTTP/1.1 204 No Content
```



4.30 Ethernet Switch Port Metrics

Property details are available in `EthernetSwitchPortMetrics.xml` metadata file.

Note: The current version of Intel® RSD does not implement Ethernet Switch Port metrics.

4.30.1 Operations

4.30.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
    "/redfish/v1/$metadata#EthernetSwitchPortMetrics.EthernetSwitchPortMetrics",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/Metrics",
  "@odata.type": "#EthernetSwitchPortMetrics.v1_0_0.EthernetSwitchPortMetrics",
  "Name": "Ethernet Switch Port Metrics",
  "Id": "Metrics",
  "Received": {
    "Packets": 8,
    "DroppedPackets": 0,
    "ErrorPackets": 0,
    "BroadcastPackets": 0,
    "MulticastPackets": 0,
    "Errors": 0,
    "Bytes": 64
  },
  "Transmitted": {
    "Packets": 128,
    "DroppedPackets": 0,
    "ErrorPackets": 0,
    "BroadcastPackets": 0,
    "MulticastPackets": 0,
    "Errors": 0,
    "Bytes": 512
  },
  "Collisions": 0,
  "Oem": {}
}
```

4.30.1.2 PUT


Operation is not allowed on this resource.

4.30.1.3 PATCH

Operation is not allowed on this resource.

4.30.1.4 POST

Operation is not allowed on this resource.



4.30.1.5 DELETE

Operation is not allowed on this resource.

4.31 Ethernet Switch ACL Collection

The Ethernet Switch Access Control List (ACL) collection resource provides the collection of resources of type `EthernetSwitchACL` defined on the Ethernet switch.

Information on properties can be obtained from metadata file: `EthernetSwitchACLCollection.xml`.

4.31.1 Operations

4.31.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/ACLs
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchACLCollection.EthernetSwitchACLCollection",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs",
  "@odata.type": "#EthernetSwitchACLCollection.EthernetSwitchACLCollection",
  "Name": "Ethernet Switch Access Control List Collection",
  "Description": "Switch Access Control List. Each ACL entry can be bind to any switch
port",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1"
    }
  ]
}
```

4.31.1.2 PUT

Operation is not allowed on this resource.

4.31.1.3 PATCH

Operation is not allowed on this resource.

4.31.1.4 POST

POST action is used to create a new clean Access Control List (ACL) without any rules and bound port. Because of that, JSON used in this post operation does not contain any properties.

Request:

```
POST /redfish/v1/EthernetSwitches/Switch1/ACLs
Content-Type: application/json
{
}
```

**Response:**

```
HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1
```

4.31.1.5 DELETE

Operation is not allowed on this resource.

4.32 Ethernet Switch ACL

Ethernet Switch ACL resource – provides detailed information about a switch ACL defined on switch.

Detailed information about resource properties can be obtained from metadata file: [EthernetSwitchACL.xml](#)

4.32.1 Operations**4.32.1.1 GET****Request:**

```
GET /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#EthernetSwitchACL.EthernetSwitchACL",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1",
  "@odata.type": "#EthernetSwitchACL.v1_0_0.EthernetSwitchACL",
  "Id": "ACL1",
  "Name": "Ethernet Switch Access Control List",
  "Description": "Switch ACL",
  "Oem": {},
  "Rules": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules"
  },
  "Links": {
    "BoundPorts": [{
      "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/sw0p1"
    }],
    "Oem": {}
  }
}

  "Actions": {
    "#EthernetSwitchACL.Bind": {
      "target":
"/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Actions/EthernetSwitchACL.Bind",
      "Port@Redfish.AllowableValues": [
        {"@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/sw0p2"},
        {"@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/sw0p3"}
      ]
    },
    "#EthernetSwitchACL.Unbind": {
      "target":
"/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Actions/EthernetSwitchACL.Unbind",
      "Port@Redfish.AllowableValues": [
        {"@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/sw0p1"}
      ]
    }
  },
}
```

}

4.32.1.2 PUT

Operation is not allowed on this resource.

4.32.1.3 PATCH

Operation is not allowed on this resource.

4.32.1.4 POST

POST action is used to execute one of supported actions:

1. Bind – action binds given port to ACL
2. Unbind – action will remove given port from ACL

Table 14. Port Attribute

Attribute	Type	Required	Description
Port	Link object	Yes	Provides URI of switch port that should be bind to current ACL. Port should be located on the same switch as ACL is.

Request:

```
POST /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Actions/EthernetSwitchACL.Bind
Content-Type: application/json
{
    "Port": {
        "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/sw0p2"
    }
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.32.1.5 DELETE

Request:

```
DELETE /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1
```

Response:

```
HTTP/1.1 204 No Content
```

Note: The switch may contain some pre-defined ACLs that cannot be deleted. In case of attempt to delete such rule, HTTP 400 `BadRequest` will be returned along with extended error info indicating that ACL is persistent.

4.33 Ethernet Switch ACL Rule Collection

Ethernet Switch ACL rule collection resource – provides a collection of all rules for ACL defined on switch.

Detailed info about resource properties can be obtained from metadata file:

`EthernetSwitchACLRuleCollection.xml`



4.33.1 Operations

4.33.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
    "/redfish/v1/$metadata#EthernetSwitchACLRuleCollection.EthernetSwitchACLRuleCollection",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules",
  "@odata.type": "#EthernetSwitchACLRuleCollection.EthernetSwitchACLRuleCollection",
  "Name": "Ethernet Switch Access Control List Rules Collection",
  "Description": "Rules for switch Access Control List. Each Rule defines single
    action and at least one condition",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule1"
    }
  ]
}
```

4.33.1.2 PUT

Operation is not allowed on this resource.


4.33.1.3 PATCH

Operation is not allowed on this resource.

4.33.1.4 POST

Table 15. New ACL Rule Condition Attributes

Attribute	Type	Required	Description
RuleId	Number	No	This is ACL rule ID which determine rule priority. If not provided during creation, service will assign default next free Id.
Action	String (enum)	Yes	Action that will be executed when rule condition will be met. Available actions: • Permit – packets meeting condition will be allowed • Deny – deny packets meeting condition • Forward – forwards packets to selected interface • Mirror – mirrors traffic on selected interface
ForwardMirrorInterface	Link object	Yes for "Forward" and "Mirror" actions	This is link to interface where traffic will be mirrored/forwarded.
MirrorPortRegion	Array of link objects	Yes for "Mirror" action	Array of links to Ethernet interfaces which traffic should be mirrored on ForwardMirrorInterface .
MirrorType	String (enum)	Yes for "Mirror" action	Type of mirroring traffic. Available values: • Egress - Mirror egressing traffic on the mirrored port to the mirror destination port • Ingress - Mirror ingressing traffic on the mirrored port to the mirror destination port




Attribute	Type	Required	Description
			- Bidirectional - Mirror ingressing and egressing traffic on the mirrored port to the mirror destination port - Redirect - Mirror ingress traffic to the mirror destination port and drop the traffic ingressing the mirror ports
Condition	Object	Yes	Provides all conditions that must be met to trigger rule action. Must contain at least one non-null property. List of available properties is described below.

Table 16. ACL Rule Condition Attributes

Attribute	Type	Required	Nullable	Description			
IPSource	Object	No	Yes	Provides packet source IPv4 address.			
				Attribute	Type	Required	Description
				IPv4Address	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in the corresponding value property are relevant for matching for a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
IPDestination	Object	No	Yes	Provides packet destination IPv4 address			
				Attribute	Type	Required	Description
				IPv4Address	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
MACSource	Object	No	Yes	Provides packet source MAC address:			
				Attribute	Type	Required	Description
				MACAddress	String	Yes	IPv4 address



Attribute	Type	Required	Nullable	Description			
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
MACDestination	Object	No	Yes	Provides packet destination MAC address:			
				Attribute	Type	Required	Description
				MACAddress	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
VLANId	Object	No	Yes	Provides packet VLAN tag ID:			
				Attribute	Type	Required	Description
				Id	Number	Yes	VLAN Id tag
				Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
L4SourcePort	Object	No	Yes	IP layer 4 Source port. Contains following properties:			
				Attribute	Type	Required	Description
				Port	Number	Yes	Port numeric value



Attribute	Type	Required	Nullable	Description																
				<table><tr><td>Mask</td><td>Number, null</td><td>No</td><td>The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.</td></tr></table>	Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.												
Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.																	
L4DestinationPort	Object	No	Yes	<table><tr><td colspan="4">IP layer 4 Destination port. Contains following properties:</td></tr><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>Port</td><td>Number</td><td>Yes</td><td>Port numeric value</td></tr><tr><td>Mask</td><td>Number, null</td><td>No</td><td>Mask</td></tr></table>	IP layer 4 Destination port. Contains following properties:				Attribute	Type	Required	Description	Port	Number	Yes	Port numeric value	Mask	Number, null	No	Mask
IP layer 4 Destination port. Contains following properties:																				
Attribute	Type	Required	Description																	
Port	Number	Yes	Port numeric value																	
Mask	Number, null	No	Mask																	
L4Protocol	Number	No	Yes	IP layer 4 protocol number as defined here: http://www.iana.org/assignments/protocol-numbers/protocol-numbers.xhtml																

Request:

```
POST /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules
Content-Type: application/json
{
  "RuleId": 1,
  "Action": "Deny",
  "ForwardMirrorInterface": null,
  "MirrorPortRegion": [],
  "MirrorType": null,
  "Condition": {
    "IPSource": {
      "IPv4Address": "192.168.8.0",
      "Mask": "0.0.0.255"
    },
    "IPDestination": null,
    "MACSource": null,
    "MACDestination": null,
    "VLANId": null,
    "L4SourcePort": null,
    "L4DestinationPort": null,
    "L4Protocol": null
  }
}
```

Response:

```
HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule2
```

4.33.1.5 DELETE

Operation is not allowed on this resource.



4.34 Ethernet Switch ACL Rule

The Ethernet Switch ACL rule resource – provides detailed information about a switch ACL rule defined identified by {ruleID}.

Detailed info about these resource properties can be obtained from metadata file:

EthernetSwitchACLRule.xml

4.34.1 Operations

4.34.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule1
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitchACLRule.EthernetSwitchACLRule",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule1",
  "@odata.type": "#EthernetSwitchACLRule.v1_0_0.EthernetSwitchACLRule",
  "Id": "Rule1",
  "Name": "Example Rule",
  "Description": "User defined rule for ACL",
  "RuleId": 1,
  "Action": "Mirror",
  "ForwardMirrorInterface": {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port9"
  },
  "MirrorPortRegion": [{
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1"
  },
  {
    "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port2"
  }],
  "MirrorType": "Bidirectional",
  "Condition": {
    "IPSource": {
      "IPv4Address": "192.168.1.0",
      "Mask": "0.0.0.255"
    },
    "IPDestination": null,
    "MACSource": {
      "Address": "00:11:22:33:44:55",
      "Mask": null
    },
    "MACDestination": null,
    "VLANId": {
      "Id": 1088,
      "Mask": 4095
    },
    "L4SourcePort": {
      "Port": 22,
      "Mask": 255
    },
    "L4DestinationPort": null,
    "L4Protocol": null
  },
}
```

```

    "Oem": {
    },
    "Links": {
    }
}

```

4.34.1.2 PUT

Operation is not allowed on this resource.

4.34.1.3 PATCH


The attributes of the ACL Rule that can be modified by PATCH method are listed in [Table 17](#).

Table 17. ACL Rule Modification Attributes

Attribute	Type	Required	Description
RuleId	Number	No	This is ACL rule ID that determines rule priority.
Action	String (enum)	No	Action that will be executed when rule condition will be met. Available actions: • Permit – packets meeting condition will be allowed • Deny – deny packets meeting condition • Forward – forwards packets to selected interface • Mirror – mirrors traffic on selected interface
ForwardMirrorInterface	Link object	Yes for "Forward" and "Mirror" actions	This is link to interface where traffic will be mirrored/forwarded.
MirrorPortRegion	Array of link objects	Yes for "Mirror" action	Array of links to Ethernet interfaces which traffic should be mirrored on ForwardMirrorInterface
MirrorType	String (enum)	Yes for "Mirror" action	Type of mirroring traffic. Available values: • Egress - Mirror egressing traffic on the mirrored port to the mirror destination port • Ingress - Mirror ingressing traffic on the mirrored port to the mirror destination port • Bidirectional - Mirror ingressing and egressing traffic on the mirrored port to the mirror destination port • Redirect - Mirror ingress traffic to the mirror destination port and drop the traffic ingressing the mirror ports
Condition	Object	No	Provides all conditions that must be met to trigger rule action. List of available properties is described in Table 18 .

**Table 18. ACL Rule Condition Attributes**

Attribute	Type	Required	Nullable	Description			
IPSource	Object	No	Yes	Provides packet source IPv4 address.			
				Attribute	Type	Required	Description
				IPv4Address	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.
IPDestination	Object	No	Yes	Provides packet destination IPv4 address			
				Attribute	Type	Required	Description
				IPv4Address	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.
MACSource	Object	No	Yes	Provides packet source MAC address:			
				Attribute	Type	Required	Description
				MACAddress	String	Yes	IPv4 address
				Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.



Attribute	Type	Required	Nullable	Description												
MACDestination	Object	No	Yes	Provides packet destination MAC address: <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>MACAddress</td><td>String</td><td>Yes</td><td>IPv4 address</td></tr><tr><td>Mask</td><td>String, null</td><td>No</td><td>The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.</td></tr></table>	Attribute	Type	Required	Description	MACAddress	String	Yes	IPv4 address	Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
Attribute	Type	Required	Description													
MACAddress	String	Yes	IPv4 address													
Mask	String, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.													
VLANId	Object	No	Yes	Provides packet VLAN tag ID: <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>Id</td><td>Number</td><td>Yes</td><td>VLAN Id tag</td></tr><tr><td>Mask</td><td>Number, null</td><td>No</td><td>The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don' t care bit in the value). Null value means all bits are relevant.</td></tr></table>	Attribute	Type	Required	Description	Id	Number	Yes	VLAN Id tag	Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don' t care bit in the value). Null value means all bits are relevant.
Attribute	Type	Required	Description													
Id	Number	Yes	VLAN Id tag													
Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don' t care bit in the value). Null value means all bits are relevant.													
L4SourcePort	Object	No	Yes	IP layer 4 Source port. Contains following properties: <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>Port</td><td>Number</td><td>Yes</td><td>Port numeric value</td></tr><tr><td>Mask</td><td>Number, null</td><td>No</td><td>The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.</td></tr></table>	Attribute	Type	Required	Description	Port	Number	Yes	Port numeric value	Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.
Attribute	Type	Required	Description													
Port	Number	Yes	Port numeric value													
Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a don't care bit in the value). Null value means all bits are relevant.													



Attribute	Type	Required	Nullable	Description												
L4DestinationPort	Object	No	Yes	IP layer 4 Destination port. Contains following properties: <table><tr><th>Attribute</th><th>Type</th><th>Required</th><th>Description</th></tr><tr><td>Port</td><td>Number</td><td>Yes</td><td>Port numeric value</td></tr><tr><td>Mask</td><td>Number, null</td><td>No</td><td>The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.</td></tr></table>	Attribute	Type	Required	Description	Port	Number	Yes	Port numeric value	Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.
Attribute	Type	Required	Description													
Port	Number	Yes	Port numeric value													
Mask	Number, null	No	The mask selects which bits in corresponding value property are relevant for matching a frame (a zero bit in the mask indicates a do not care bit in the value). Null value means all bits are relevant.													
L4Protocol	Number	No	Yes	IP layer 4 protocol number as defined here: http://www.iana.org/assignments/protocol-numbers/protocol-numbers.xhtml												

Request:

```

PATCH /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule2
Content-Type: application/json
{
  "RuleId": 1,
  "Action": "Permit",
  "ForwardMirrorInterface": null,
  "MirrorPortRegion": [],
  "MirrorType": null,
  "Condition": {
    "IPSource": {
      "IPv4Address": "192.168.6.0",
      "Mask": "0.0.0.255"
    },
    "IPDestination": null,
    "MACSource": null,
    "MACDestination": null,
    "VLANId": null,
    "L4SourcePort": null,
    "L4DestinationPort": null,
    "L4Protocol": null
  }
}

```

Response:**Or:**

```

HTTP/1.1 200 OK
{
  (updated resource body)
}

```

4.34.1.4 POST

Operation is not allowed on this resource.

4.34.1.5 DELETE

Request:

```
DELETE /redfish/v1/EthernetSwitches/Switch1/ACLs/ACL1/Rules/Rule2
```

Response:

```
HTTP/1.1 204 No Content
```

4.35 Ethernet Switch Port Static MAC Collection

Ethernet Switch Port Static MAC collection resource – provides a collection of all static MAC forwarding table entries.

Detailed information about these resource properties can be obtained from metadata file:

`EthernetSwitchACLRuleCollection.xml`

4.35.1 Operations

4.35.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#EthernetSwitches/Members/Switch1/Ports/Members/StaticMACs",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs",
  "@odata.type": "#StaticMACCollection.StaticMACCollection",
  "Name": "Static MAC Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/1"
    }
  ]
}
```

4.35.1.2 PUT

Operation is not allowed on this resource.

4.35.1.3 PATCH

Operation is not allowed on this resource.

4.35.1.4 POST

The attributes of POST action to create new static MAC entry are listed in [Table 19](#).

**Table 19. New Static MAC Entry Attributes**

Attribute	Type	Required	Description
MACAddress	String	Yes	MAC address that should be forwarded to this port.
VLANId	Number, null	No	This, if specified, defines which packets tagged with specific VLANId should be forwarded to this port.

Request:

```
POST /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs
Content-Type: application/json
{
  "MACAddress": "00:11:22:33:44:55",
  "VLANId": 69
}
```

Response:

```
HTTP/1.1 201 Created
Location:
http://<IP>:<PORT>/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/2
```

4.35.1.5 DELETE

Operation is not allowed on this resource.

4.36 Ethernet Switch Port Static MAC

Ethernet Switch Port Static MAC resource – provides detailed information about a static MAC address forward table entry.

Detailed information about this resource property can be obtained from metadata file:


EthernetSwitchStaticMAC.xml

4.36.1 Operations**4.36.1.1 GET****Request:**

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EthernetSwitches/Members/Switch1/Ports/Members/StaticMACs/Membe
rs/$entity",
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/1",
  "@odata.type": "#StaticMAC.v1_1_0.StaticMAC",
  "Id": "1",
  "Name": "StaticMAC",
  "Description": "description-as-string",
  "MACAddress": "00:11:22:33:44:55",
  "VLANId": 112,
  "Oem": {}
}
```



4.36.1.2 PUT

Operation is not allowed on this resource.

4.36.1.3 PATCH

Attributes of static MAC that can be modified by PATCH method are listed in [Table 20](#).

Table 20. Static MAC Modification Attributes

Attribute	Type	Required	Description
MACaddress	String	Yes	MAC address that should be forwarded to this port
VLANId	Number, null	No	This if specified defines which packets tagged with specific <code>VLANId</code> , should be forwarded to this port.

Request:

```
PATCH /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/2
Content-Type: application/json
{
  "MACAddress": "AA:11:22:33:44:55",
  "VLANId": 697
}
```

Response:

Or:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

4.36.1.4 POST

Operation is not allowed on this resource.

4.36.1.5 DELETE

Request:

```
DELETE /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/StaticMACs/2
Response:
HTTP/1.1 204 No Content
```

4.37 Network Protocol


Network protocol resource – provides detailed information about all network services supported by a manager identified by `{managerID}`. Network service attributes are listed in [Table 21](#).

Table 21. Network Service Attributes

Name	Network service		
Type URI	/redfish/v1/Managers/{managerID}/NetworkProtocol		
Attribute	Type	Required	Description
Id	String	Yes	Resource identifier
Name	String	Yes	Resource name
Description	String, null	No	Resource description



Name	Network service					
Type URI	/redfish/v1/Managers/{managerID}/NetworkProtocol					
Attribute	Type	Required	Description			
Status	Object, null	No	Refer to Section 6.1 for resource status.			
Oem	Object	No	OEM defined object			
HostName	String, null	No	Provides information about host name			
FQDN	String, null	No	Fully Qualified Domain Name			
HTTP	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
HTTPS	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
SNMP	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
VirtualMedia	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
Telnet	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
SSDP	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
			NotifyMulticastIntervalsSeconds	Number, null	No	Indicates how often the Multicast is done from this service for SSDP
			NotifyTTL	Number, null	No	Indicates the time to live hop count for SSDPs Notify messages.
			NotifyIPv6Scope	String, null	No	Indicates the scope for the IPv6 Notify messages for SSDP
IPMI	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port



Name	Network service					
Type URI	/redfish/v1/Managers/{managerID}/NetworkProtocol					
Attribute	Type	Required	Description			
SSH	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port
KVMIP	Object	No	Name	Type	Required	Description
			ProtocolEnabled	Boolean, null	No	Availability of protocol
			Port	Number, null	No	Indicates the protocol port

4.37.1 Operations

4.37.1.1 GET

Request:

```
GET /redfish/v1/Managers/{managerID}/NetworkProtocol
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#ManagerNetworkProtocol.ManagerNetworkProtocol",
  "@odata.id": "/redfish/v1/Managers/BMC1/NetworkProtocol",
  "@odata.type": "#ManagerNetworkProtocol.v1_0_0.ManagerNetworkProtocol",
  "Id": "NetworkProtocol",
  "Name": "Manager Network Protocol",
  "Description": "Manager Network Service Status",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "HostName": "mymanager",
  "FQDN": "mymanager.mydomain.com",
  "HTTP": {
    "ProtocolEnabled": true,
    "Port": 80
  },
  "HTTPS": {
    "ProtocolEnabled": true,
    "Port": 443
  },
  "IPMI": {
    "ProtocolEnabled": true,
    "Port": 623
  },
  "SSH": {
    "ProtocolEnabled": true,
    "Port": 22
  },
  "SNMP": {
    "ProtocolEnabled": true,
```



```

    "Port": 161
  },
  "VirtualMedia": {
    "ProtocolEnabled": true,
    "Port": 17988
  },
  "SSDP": {
    "ProtocolEnabled": true,
    "Port": 1900,
    "NotifyMulticastIntervalSeconds": 600,
    "NotifyTTL": 5,
    "NotifyIPv6Scope": "Site"
  },
  "Telnet": {
    "ProtocolEnabled": true,
    "Port": 23
  },
  "KVMIP": {
    "ProtocolEnabled": true,
    "Port": 5288
  },
  "Oem": {}
}

```

4.37.1.2 PUT

Operation is not allowed on this resource.

4.37.1.3 PATCH

Operation is not allowed on this resource.

4.37.1.4 POST

Operation is not allowed on this resource.

4.37.1.5 DELETE

Operation is not allowed on this resource.

4.38 Ethernet Interface Collection

Ethernet interface collection resource – provides a collection of all Ethernet interfaces supported by a manager identified by {managerID} or included in a blade identified by {bladeID}. Ethernet interface collection attributes are listed in [Table 2](#).

4.38.1 Operations

4.38.1.1 GET

Request:

```

GET /redfish/v1/Managers/{managerID}/EthernetInterfaces
Content-Type: application/json

```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#Managers/Members/1/EthernetInterfaces/$entity",
  "@odata.id": "/redfish/v1/Managers/1/EthernetInterfaces",
  "@odata.type":
"#EthernetNetworkInterface.v1_0_0.EthernetNetworkInterfaceCollection",
  "Name": "Ethernet Network Interface Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Managers/1/EthernetInterfaces/1"
    }
  ]
}
```

4.38.1.2 PUT

Operation is not allowed on this resource.

4.38.1.3 PATCH

Operation is not allowed on this resource.

4.38.1.4 POST

Operation is not allowed on this resource.

4.38.1.5 DELETE

Operation is not allowed on this resource.

4.39 Ethernet Interface

Ethernet interface resource – provides detailed information about an Ethernet interface identified by {nicID}.

For current API version this resource is identical with System Network Interface (refer to [Section 4.22](#)).

4.40 VLAN Network Interface Collection

VLAN Network Interface collection resource – provides a collection of all VLAN network interface existing on a Switch Port identified by {portID} or network interface identified by {nicID}. VLAN network interface collection attributes are listed in [Section 4.40, VLAN Network Interface Collection](#).

4.40.1 Operations

4.40.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs
Content-Type: application/json
```

**Response:**

```
{
  "@odata.context":
"/redfish/v1/$metadata#VlanNetworkInterfaceCollection.VlanNetworkInterfaceCollection",
  "@odata.id": "/redfish/v1/EthernetSwitches",
  "@odata.type": "#VlanNetworkInterfaceCollection.VlanNetworkInterfaceCollection",
  "Name": "VLAN Network Interface Collection",
  "Description": "VLAN Network Interface Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id":
"/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN1"
    }
  ]
}
```

4.40.1.2 PUT

Operation is not allowed on this resource.

4.40.1.3 PATCH

Operation is not allowed on this resource.

4.40.1.4 POST

POST action attributes are listed in [Table 22](#).

Table 22. Post Action Attributes


Attribute	Type	Required	Description		
Oem	Object	Yes	OEM defined object		
			"Intel_RackScale" extensions:		
			Attribute	Type	Description
			Tagged	Boolean	Indicates if VLAN is tagged (as defined in IEEE 802.1Q) – required property.
VLANEnable	Boolean	Yes	Indicates if this VLAN is enabled		
VLANId	Number	Yes	VLAN identifier for this Network interface card (NIC)		

Request:

```
POST /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs
Content-Type: application/json
{
  "VLANId": 101,
  "VLANEnable": true,
  "Oem": {
    "Intel_RackScale": {
      "Tagged": false
    }
  }
}
```

Response:

```
HTTP/1.1 201 Created
Location:
http://<IP>:<PORT>/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN2
```



4.40.1.5 DELETE

Operation is not allowed on this resource.

4.41 VLAN Network Interface

VLAN Network Interface resource – provides detailed information about a VLAN network interface identified by {vlanID}.

Details of this resource are described in metadata file: [VLanNetworkInterface.xml](#), OEM extensions details are available in [IntelRackScaleOem.xml](#).

4.41.1 Operations

4.41.1.1 GET

Request:

```
GET /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/{vlanID}
Content-Type: application/json
```

Response:

```
{
  "@odata.id": "/redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN1",
  "@odata.context":
"/redfish/v1/$metadata#VLanNetworkInterface.VLanNetworkInterface",
  "@odata.type": "#VLanNetworkInterface.v1_0_1.VLanNetworkInterface",
  "Id": "VLAN1",
  "Name": "VLAN Network Interface",
  "Description": "System NIC 1 VLAN",
  "VLANEnable": true,
  "VLANId": 101,
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.VLanNetworkInterface",
      "Tagged": false,
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      }
    }
  }
}
```

4.41.1.2 PUT

Operation is not allowed on this resource.

4.41.1.3 PATCH

The properties in [Table 23](#) can be updated by the PATCH operation:

Table 23. Properties Updated by Patch Operation

Attribute	Type	Required	Description
VLANId	Number	No	VLAN identifier for this VLAN.



Attribute	Type	Required	Description
			Note: Ability to write this property value is implementation specific. May not work, or may work on only some types of VLANs (e.g., only untagged VLANs).

Request:

```
PATCH /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN1
Content-Type: application/json
{
  "VLANId": 202
}
```

Response:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

Or:

```
HTTP/1.1 204 No Content
```

Or (when task is created):

```
HTTP/1.1 204 No Content202 Accepted
OrLocation: http://<IP:port>/redfish/v1/TaskService/Tasks/1/TaskMonitor
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": "New",
  "StartTime": "2016-09-01T04:45+01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```

Or:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

4.41.1.4 POST

Operation is not allowed on this resource.

4.41.1.5 DELETE**Request:**

```
DELETE /redfish/v1/EthernetSwitches/Switch1/Ports/Port1/VLANs/VLAN2
```

Response:

```
HTTP/1.1 204 No Content
```

4.42 Event Service

The Event Service resource is responsible for sending events to subscribers. Event service attributes are listed in [Table 24](#).

Table 24. Event Service Attributes

Name		Event service	
Type URI		/redfish/v1/EventService	
Attribute	Type	Required	Description
Id	String	Yes	Resource identifier
Name	String	Yes	Resource name
Description	String, null	No	Resource description
Status	Object, null	No	Refer to Section 6.1 for resource status.
Oem	Object, null	No	OEM defined object
ServiceEnabled	Boolean, Null	No	This indicates whether this service is enabled.
DeliveryRetryAttempts	Number	No	This is the number of attempts an event posting is retried before the subscription is terminated.
DeliveryRetryIntervalSeconds	Number	No	This represents the number of seconds between retry attempts for sending any given Event.
EventTypesForSubscription	Array	Yes	This is the types of Events that can be subscribed to. Available event types: • StatusChange - The status of this resource has changed • ResourceUpdated - The value of this resource has been updated. • ResourceAdded - A resource has been added • ResourceRemoved - A resource has been removed • Alert - A condition exist which requires attention. • MetricReport - A MetricReport as specified by MetricReportDefinition.
Subscriptions	Object, null	Yes	This is a reference to a collection of Event Destination resources.
Actions	Object	No	The Actions object contains the available custom actions on this resource.

4.42.1 Operations

4.42.1.1 GET

Request:

```
GET /redfish/v1/EventService
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#EventService",
  "@odata.id": "/redfish/v1/EventService",
  "@odata.type": "#EventService.v1_0_2.EventService",
  "Id": "EventService",
  "Name": "Event Service",
  "Description": "Event Service",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "ServiceEnabled": true,
  "DeliveryRetryAttempts": 3,
  "DeliveryRetryIntervalSeconds": 60,
  "EventTypesForSubscription": [
```



```

        „StatusChange“,
        „ResourceUpdated“,
        „ResourceAdded“,
        „ResourceRemoved“,
        „Alert“,
        „MetricReport“
    ],
    „Subscriptions“: {
        „@odata.id“: „/redfish/v1/EventService/Subscriptions“
    },
    „Actions“: {
        „Oem“: {}
    },
    „Oem“: {}
}

```

4.42.1.2 PUT

Operation is not allowed on this resource.

4.42.1.3 PATCH

Operation is not allowed on this resource.

4.42.1.4 POST

Operation is not allowed on this resource.

4.42.1.5 DELETE

Operation is not allowed on this resource.

4.43 Event Subscription Collection

4.43.1 Metadata

<http://redfish.dmtf.org/schemas/v1/EventDestinationCollection.xml>

4.43.2 Operations

4.43.2.1 GET

Request:

```

GET /redfish/v1/EventService/Subscriptions
Content-Type: application/json


```

Response:

```

{
    „@odata.context“: „/redfish/v1/$metadata#EventService/Members/Events/$entity“,
    „@odata.type“: „#EventDestinationCollection.EventDestinationCollection“,
    „Name“: „Event Subscriptions Collection“,
    „Description“: „description-as-a-string“,
    „Members@odata.count“: 1,
    „Members“: [
        {

```



```
        „@odata.id“: „/redfish/v1/EventService/Subscriptions/1“
    }
}
}
```

4.43.2.2 PUT

Operation is not allowed on this resource.

4.43.2.3 PATCH

Operation is not allowed on this resource.

4.43.2.4 POST

Request:

```
POST /redfish/v1/EventService/Subscriptions
Content-Type: application/json
{
    „Name“: „EventSubscription 2“,
    „Destination“: „http://10.0.0.1/Destination1“,
    „EventTypes“: [
        „ResourceAdded“,
        „ResourceRemoved“
    ],
    „Context“: „HotSwap events“,
    „Protocol“: „Redfish“
}
```

Response:

```
HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/EventService/Subscriptions/2
```

4.43.2.5 DELETE

Operation is not allowed on this resource.

4.44 Event Subscription

The Event Subscription contains information about the type of events that the user subscribes to and those that should be sent. Even subscription attributes are listed in [Table 25](#).

Table 25. Event Subscription Attributes

Name		Event subscription	
Type URI		/redfish/v1/EventService/Subscriptions/{destinationID}	
Attribute	Type	Required	Description
Id	String	Yes	Resource identifier
Name	String	No	Resource name
Description	String	No	Resource description
Oem	Object	No	OEM defined object
Destination	String	Yes	The URI of the destination Event Service.



Name		Event subscription	
Type URI		/redfish/v1/EventService/Subscriptions/{destinationID}	
Attribute	Type	Required	Description
EventTypes	Array	Yes	These are types of Events that can be subscribed to. Available event types: • <code>StatusChange</code> – The status of this resource has changed • <code>ResourceUpdated</code> – The value of this resource has been updated. • <code>ResourceAdded</code> – A resource has been added • <code>ResourceRemoved</code> – A resource has been removed • <code>Alert</code> – A condition exist which requires attention. • <code>MetricReport</code> – A <code>MetricReport</code> as specified by <code>MetricReportDefinition</code>.
Context	String	Deprecated	A client-supplied string that is stored with the event destination subscription.
Protocol	String (enum)	Yes	The protocol type of the event connection. Available protocols: "Redfish" – event type that adheres to definition in the Redfish specification.
OriginResources	Array	No	A list of resources for which the service will send events specified in <code>EventTypes</code> array. Empty array or NULL is interpreted as subscription for all resources and assets in subsystem. Not exposed by current version of PSME.
MessageIds	Array	No	A list of <code>MessageIds</code> that the service will send. Not exposed by current version of PSME.

4.44.1 Metadata

<http://redfish.dmtf.org/schemas/v1/EventDestination.xml>

4.44.2 Operations

4.44.2.1 GET

Request:

```
GET /redfish/v1/EventService/Subscriptions/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#EventService/Members/Subscriptions/Members/$entity",
  "@odata.id": "/redfish/v1/EventService/Subscriptions/1",
  "@odata.type": "#EventDestination.v1_1_1.EventDestination",
  "Id": "1",
  "Name": "EventSubscription 1",
  "Description": "EventSubscription",
  "Destination": "http://192.168.1.1/Destination1",
  "EventTypes": [
    "ResourceAdded",
    "ResourceRemoved"
  ],
  "Context": "My Event",
  "Protocol": "Redfish",
  "OriginResources": [
    {"@odata.id": "/redfish/v1/Systems/1"}
  ],
  "MessageIds": [
```

```
]
}
```

4.44.2.2 PUT

Operation is not allowed on this resource.

4.44.2.3 PATCH

Operation is not allowed on this resource.

4.44.2.4 POST

Operation is not allowed on this resource.

4.44.2.5 DELETE

Request:

```
DELETE /redfish/v1/EventService/Subscriptions/1
```

Response:

```
HTTP/1.1 204 No Content
```

4.45 Event Array

Definition of Event Array that is POSTed by the Event Service to active subscribers: It represents the properties for the events themselves and not subscriptions or any other resource. Each event in this array has a set of properties that describe the event. Since this is an array, more than one event can be sent simultaneously. Event array attributes are listed in [Table 26](#) and Event attributes are listed in [Table 27](#).

Table 26. Event Array Attributes

Name		Event array	
Type URI		n/a	
Attribute	Type	Required	Description
Id	String	Yes	Resource identifier
Name	String	No	Resource name
Description	String	No	Resource description
Oem	Object	No	OEM defined object
Events	Array	Yes	Array of events – Refer to Table 27
Context	String	No	A context can be supplied at subscription time. This property shall contain a client-supplied context for the Event Destination to which this event is being sent.

Table 27. Event Attributes

Attribute	Type	Required	Description
EventType	String (enum)	Yes	These are the types of Events that can be subscribed to. Available event types: StatusChange - The status of this resource has changed ResourceUpdated – The value of this resource has been updated. ResourceAdded – A resource has been added ResourceRemoved – A resource has been removed Alert – A condition exist which requires attention. MetricReport – A MetricReport as specified by MetricReportDefinition.
EventId	String	No	This is a unique instance identifier of an event.
EventTimestamp	String	No	The event occurred in this time.



Attribute	Type	Required	Description
Severity	String	No	This is the severity of the event.
Message	String	No	This is the human readable message, if provided.
MessageId	String	Yes	This is the key for this message, which can be used to look up the message in a message registry.
MessageArgs	Array of strings	No	This array of message arguments is substituted for the arguments in the message when looked up in the message registry.
Context	String	Deprecated.	A context can be supplied at subscription time. This property is the context value supplied by the subscriber.
OriginOfCondition	Object	Yes	This indicates the resource that originated the condition that caused the event to be generated.

4.45.1 Metadata

<http://redfish.dmtf.org/schemas/v1/Event.xml>

4.45.2 Operations

4.45.2.1 POST

Request:


```
POST http://192.168.1.1/Destination1
Content-Type: application/json
{
  "@odata.context": "/redfish/v1/$metadata#EventService/Members/Events/1",
  "@odata.id": "/redfish/v1/EventService/Events/1",
  "@odata.type": "#Event.v1_2_0.Event",
  "Id": "1",
  "Name": "Event Array",
  "Description": "Events",
  "Events": [
    {
      "EventType": "ResourceRemoved",
      "EventId": "ABC132489713478812346",
      "Severity": "Ok",
      "EventTimestamp": "2015-02-23T14:44:44+00:00",
      "Message": "The Blade was removed",
      "MessageId": "Base.1.0.Success",
      "MessageArgs": [],
      "OriginOfCondition": {
        "@odata.id": "/redfish/v1/Systems/System1"
      },
      "Context": "HotSwap event"
    }
  ]
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.45.2.2 PUT

Operation is not allowed on this resource.



4.45.2.3 PATCH

Operation is not allowed on this resource.

4.45.2.4 GET

Operation is not allowed on this resource.

4.45.2.5 DELETE

Operation is not allowed on this resource.

4.46 Fabric Collection

Property details are available in the `FabricCollection.xml` metadata file.

4.46.1 Operations

4.46.1.1 GET

Request:

```
GET /redfish/v1/Fabrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#FabricCollection.FabricCollection",
  "@odata.id": "/redfish/v1/Fabrics",
  "@odata.type": "#FabricCollection.FabricCollection",
  "Name": "Fabric Collection",
  "Description": " Fabric Collection",
  "Members@odata.count": 1,
  "Members": [{
    "@odata.id": "/redfish/v1/Fabrics/PCIe"
  }]
}
```

4.46.1.2 PUT

Operation is not allowed on this resource.

4.46.1.3 PATCH

Operation is not allowed on this resource.

4.46.1.4 POST

Operation is not allowed on this resource.

4.46.1.5 DELETE

Operation is not allowed on this resource.



4.47 Fabric

Property details are available in `Fabric.xml` metadata file.

4.47.1 Operations

4.47.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIE
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Fabric.Fabric",
  "@odata.id": "/redfish/v1/Fabrics/PCIE",
  "@odata.type": "#Fabric.v1_0_0.Fabric",
  "Id": "PCIE",
  "Name": "PCIE Fabric",
  "FabricType": "PCIE",
  "Description": "PCIE Fabric",
  "MaxZones": null,
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "Zones": {
    "@odata.id": "/redfish/v1/Fabrics/PCIE/Zones"
  },
  "Endpoints": {
    "@odata.id": "/redfish/v1/Fabrics/PCIE/Endpoints"
  },
  "Switches": {
    "@odata.id": "/redfish/v1/Fabrics/PCIE/Switches"
  },
  "Links": {
    "Oem": {}
  },
  "Actions": {
    "Oem": {}
  },
  "Oem": {}
}
```

4.47.1.2 PUT


Operation is not allowed on this resource.

4.47.1.3 PATCH

Operation is not allowed on this resource.

4.47.1.4 POST

Operation is not allowed on this resource.



4.47.1.5 DELETE

Operation is not allowed on this resource.

4.48 Switch collection

Property details are available in the `SwitchCollection.xml` metadata file.

4.48.1 Operations

4.48.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Switches
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#SwitchCollection.SwitchCollection",
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Switches",
  "@odata.type": "#SwitchCollection.SwitchCollection",
  "Name": "Switch Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1"
    }
  ]
}
```

4.48.1.2 PUT

Operation is not allowed on this resource.

4.48.1.3 PATCH

Operation is not allowed on this resource.

4.48.1.4 POST

Operation is not allowed on this resource.

4.48.1.5 DELETE

Operation is not allowed on this resource.

4.49 Switch

Property details are available in the `Switch.xml` metadata file.



4.49.1 Operations

4.49.1.1 GET

Request:


```
GET /redfish/v1/Fabrics/PCIE/Switches/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Switch.Switch",
  "@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1",
  "@odata.type": "#Switch.v1_0_0.Switch",
  "Id": "1",
  "Name": "PCIE Switch",
  "Description": "PCIE Switch",
  "SwitchType": "PCIE",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "Manufacturer": "Manufacturer Name",
  "Model": "Model Name",
  "SKU": "SKU",
  "SerialNumber": "1234567890",
  "PartNumber": "997",
  "AssetTag": "Customer Asset Tag",
  "DomainID": 1,
  "IsManaged": true,
  "TotalSwitchHardwareWidth": 97,
  "IndicatorLED": null,
  "PowerState": "On",
  "Ports": {
    "@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports"
  },
  "Redundancy": [],
  "Links": {
    "Chassis": [
      { "@odata.id": "/redfish/v1/Chassis/PCIESwitch1" }
    ],
    "ManagedBy": [],
    "Oem": {}
  },
  "Actions": {
    "#Switch.Reset": {
      "target": "/redfish/v1/Fabrics/PCIE/Switches/1/Actions/Switch.Reset",
      "ResetType@Redfish.AllowableValues": [
        "GracefulRestart"
      ]
    },
    "Oem": {}
  },
  "Oem": {}
}
```

4.49.1.2 PUT

Operation is not allowed on this resource.



4.49.1.3 PATCH

Operation is not allowed on this resource.

4.49.1.4 POST

To trigger a switch action the POST request should be sent:

Request:

```
POST /redfish/v1/Fabrics/PCIE/Switches/1/Actions/Switch.Reset
Content-Type: application/json
{
    "ResetType": "GracefulRestart"
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.49.1.5 DELETE

Operation is not allowed on this resource.

4.50 Port Collection

Property details are available in the `PortCollection.xml` metadata file.

4.50.1 Operations

4.50.1.1 GET

Request:

```
GET "/redfish/v1/Fabrics/PCIE/Switches/1/Ports
Content-Type: application/json
```

Response:

```
{
    "@odata.context": "/redfish/v1/$metadata#PortCollection.PortCollection",
    "@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports",
    "@odata.type": "#PortCollection.PortCollection",
    "Name": "PCIE Port Collection",
    "Description": "PCIE Port Collection",
    "Members@odata.count": 4,
    "Members": [
        {"@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Up1"},
        {"@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Up2"},
        {"@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Down1"},
        {"@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Down2"}
    ]
}
```

4.50.1.2 PUT

Operation is not allowed on this resource.



4.50.1.3 PATCH

Operation is not allowed on this resource.

4.50.1.4 POST

Operation is not allowed on this resource.

4.50.1.5 DELETE

Operation is not allowed on this resource.

4.51 Port

Property details are available in the [Port.xml](#) metadata file. OEM extension details are available in [IntelRackScaleOem.xml](#).

4.51.1 Operations

4.51.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIE/Switches/1/Ports/Up1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Port.Port",
  "@odata.id": "/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Up1",
  "@odata.type": "#Port.v1_0_0.Port",
  "Id": "Up1",
  "Name": "PCIE Upstream Port 1",
  "Description": "PCIE Upstream Port 1",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": null
  },
  "PortId": "1",
  "PortProtocol": "PCIE",
  "PortType": "UpstreamPort",
  "CurrentSpeedGbps": 32,
  "Width": 4,
  "MaxSpeedGbps": 64,
  "Actions": {
    "#Port.Reset": {
      "target":
"/redfish/v1/Fabrics/PCIE/Switches/1/Ports/Up1/Actions/PCIEPort.Reset",
      "ResetType@Redfish.AllowableValues": [
        "ForceOff",
        "ForceRestart",
        "ForceOn"
      ]
    }
  },
  "Oem": {}
},
"Links": {
```

```
"AssociatedEndpoints": [
  {
    "@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/HostRootComplex1"
  }
],
"ConnectedSwitches": [],
"ConnectedSwitchPorts": []
},
"Oem": {
  "Intel_RackScale": {
    "@odata.type": "#Intel.Oem.Port",
    "PCIeConnectionId": [
      "XYZ1234567890"
    ],
    "Metrics": {
      "@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1/Ports/Up1/Metrics"
    }
  }
}
}
```

4.51.1.2 PUT

Operation is not allowed on this resource.

4.51.1.3 PATCH

Operation is not allowed on this resource.

4.51.1.4 POST

To trigger the switch port action send a POST request:

Request:

```
POST /redfish/v1/Fabrics/PCIe/Switches/1/Ports/Up1/Actions/PCIePort.Reset
Content-Type: application/json
{
  "ResetType": "ForceRestart"
}
```

Response:

```
HTTP/1.1 204 No Content
```

4.51.1.5 DELETE

4.52 Port Metrics

Property details are available in `PortMetrics.xml` metadata file.

4.52.1 Operations



4.52.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Switches/1/Ports/Up1/Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Systems/Members/1/Port/Metrics/$entity",
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1/Ports/Up1/Metrics ",
  "@odata.type": "#PortMetrics.v1_0_0.PortMetrics",
  "Name": "Fabric Port Metrics for Port1",
  "Description": "description-as-string",
  "Id": "Metrics for Port1",
  "Health": "OK"
}
```

4.52.1.2 PUT

Operation is not allowed on this resource.

4.52.1.3 PATCH

Operation is not allowed on this resource.

4.52.1.4 POST

Operation is not allowed on this resource.

4.52.1.5 DELETE

Operation is not allowed on this resource.

4.53 Zones Collection

Property details are available in the `ZoneCollection.xml` metadata file.

4.53.1 Operations

4.53.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Zones
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#ZoneCollection.ZoneCollection",
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Zones",
  "@odata.type": "#ZoneCollection.ZoneCollection",
  "Name": "PCIe Zone Collection",
  "Description": "PCIe Zone Collection",
  "Members@odata.count": 2,
  "Members": [
    {

```

```

        "@odata.id": "/redfish/v1/Fabrics/PCIe/Zones/1"
    },
    {
        "@odata.id": "/redfish/v1/Fabrics/PCIe/Zones/2"
    }
]
}

```

4.53.1.2 PUT

Operation is not allowed on this resource.

4.53.1.3 PATCH

Operation is not allowed on this resource.

4.53.1.4 POST

To create a new Fabric zone, the initial zone structure should be POSTed.

Note: In the current PSME implementation, the PCIe Fabric switch is preconfigured with a maximum number of zones. Users cannot create additional zones.

Request:

```

POST /redfish/v1/Fabrics/PCIe/Zones
Content-Type: application/json
{
    "Name": "PCIe Zone 3",
    "Description": "PCIe Zone 3",
    "Links": {
        "Endpoints": [
            {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/HostRootComplex1"},
            {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF1"}
        ],
        "InvolvedSwitches": [
            {"@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1"}
        ]
    }
}

```

Response:

```

HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/Fabrics/PCIe/Zones/3

```

4.53.1.5 DELETE

Operation is not allowed on this resource.

4.54 Zone

Property details are available in [Zone.xml](#) metadata file.



4.54.1 Operations

4.54.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Zones/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Zone.Zone",
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Zones/1",
  "@odata.type": "#Zone.v1_0_0.Zone",
  "Id": "1",
  "Name": "PCIe Zone 1",
  "Description": "PCIe Zone 1",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "Links": {
    "Endpoints": [
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/HostRootComplex1"},
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF1"},
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF2"}
    ],
    "InvolvedSwitches": [
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1"}
    ]
  },
  "Oem": {}
}
```

4.54.1.2 PUT

Operation is not allowed on this resource.

4.54.1.3 PATCH

The PATCH method can be used to add or remove Endpoints from a Zone. The service is required to provide a complete representation of Endpoints array. A partial update is not supported.


The properties in [Table 28](#) can be updated by the PATCH operation:

Table 28. Properties Updated by Patch Operation

Attribute	Type	Required	Description
Endpoints	Array	No	An array of references to the endpoints that are contained in this zone.

Request:

```
PATCH /redfish/v1/Fabrics/PCIe/Zones/1
Content-Type: application/json
{
  "Links": {
    "Endpoints": [
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/HostRootComplex1"},
      {"@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF2"}
    ]
  }
}
```



```
}  
}
```

Response:

```
HTTP/1.1 204 No Content
```

Or:

```
HTTP/1.1 202 Accepted  
Location: http://<ip:port>/redfish/v1/TaskService/Tasks/1/TaskMonitor  
{  
  "@odata.context": "/redfish/v1/$metadata#Task.Task",  
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",  
  "@odata.type": "#Task.v1_0_0.Task",  
  "Id": "1",  
  "Name": "Task 1",  
  "TaskState": "New",  
  "StartTime": "2016-09-01T04:45+01:00",  
  "TaskStatus": "OK",  
  "Messages": [  
  ]  
}
```

4.54.1.4 POST

Operation is not allowed on this resource.

4.54.1.5 DELETE

Note: In current PSME implementation, PCIe fabric switch is preconfigured with maximum number of zones. The user cannot delete any existing zone.

Request:

```
DELETE /redfish/v1/Fabrics/PCIe/Zones/1
```

Response:

```
HTTP/1.1 204 No Content
```

4.55 Endpoint Collection

Property details are available in `EndpointCollection.xml` metadata file.

4.55.1 Operations

4.55.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Endpoints  
Content-Type: application/json
```

Response:

```
{  
  "@odata.context":  
  "/redfish/v1/$metadata#EndpointCollection.EndpointCollection",  
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints",  
  "@odata.type": "#EndpointCollection.EndpointCollection",  
  "Name": "PCIe Endpoint Collection",  
}
```



```

    "Members@odata.count": 3,
    "Members": [
      {
        "@odata.id": "/redfish/v1/Fabrics/PCIE/Endpoints/NVMeDrivePF1"
      },
      {
        "@odata.id": "/redfish/v1/Fabrics/PCIE/Endpoints/NVMeDrivePF2"
      },
      {
        "@odata.id": "/redfish/v1/Fabrics/PCIE/Endpoints/HostRootComplex1"
      }
    ]
  }
}

```

4.55.1.2 PUT

Operation is not allowed on this resource.

4.55.1.3 PATCH

Operation is not allowed on this resource.

4.55.1.4 POST

In the Intel® RSD software v2.3.2, Endpoints are created automatically for every detected NVMe drive connected to the PNC switch. Implementation of this action is not required.

Request:

```

POST /redfish/v1/Fabrics/PCIE/Endpoints
Content-Type: application/json
{
  "EndpointProtocol": "PCIE",
  "Identifiers": [
    {
      "DurableNameFormat": "UUID",
      "DurableName": "00000000-0000-0000-0000-000000000000"
    }
  ],
  "ConnectedEntities": [
    {
      "EntityRole": "Target",
      "EntityLink": {
        "@odata.id": "/redfish/v1/Chassis/PCIESwitch1/Drives/Disk.Bay.0"
      },
      "Identifiers": [
        {
          "DurableNameFormat": "UUID",
          "DurableName": "00000000-0000-0000-0000-000000000000"
        }
      ]
    }
  ]
}


```

Response:

```

HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/Fabrics/PCIE/Endpoints/3

```



4.55.1.5 DELETE

Operation is not allowed on this resource.

4.56 Endpoint

Property details are available in the `Endpoint.xml` metadata file.

Additional notes:

The `EntityLink` property may not present or may be *null* on the PSME. This property may be filled by the PODM if all resources are available.

4.56.1 Operations

4.56.1.1 GET

Request:

```
GET /redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Endpoint.Endpoint",
  "@odata.id": "/redfish/v1/Fabrics/PCIe/Endpoints/NVMeDrivePF1",
  "@odata.type": "#Endpoint.v1_1_0.Endpoint",
  "Id": "NVMeDrivePF1",
  "Name": "NVMe Drive",
  "Description": "The PCIe Physical function of an 850GB NVMe drive",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "EndpointProtocol": "PCIe",
  "Identifiers": [
    {
      "DurableNameFormat": "UUID",
      "DurableName": "00000000-0000-0000-0000-000000000000"
    }
  ],
  "ConnectedEntities": [
    {
      "EntityType": "Drive",
      "EntityRole": "Target",
      "EntityLink": {
        "@odata.id": "/redfish/v1/Chassis/PCISwitch1/Drives/Disk.Bay.0"
      },
      "Identifiers": [
        {
          "DurableNameFormat": "UUID",
          "DurableName": "00000000-0000-0000-0000-000000000000"
        }
      ]
    },
    {
      "Oem": {}
    }
  ],
  "Redundancy": [],

```



```

"HostReservationMemoryBytes": null,
"Links": {
  "Ports": [
    {
      "@odata.id": "/redfish/v1/Fabrics/PCIe/Switches/1/Ports/Down1"
    }
  ]
},
"Oem": {},
"Actions": {
  "Oem": {}
}
}

```

4.56.1.2 PUT

Operation is not allowed on this resource.

4.56.1.3 PATCH

Operation is not allowed on this resource.

4.56.1.4 POST

Operation is not allowed on this resource.

4.56.1.5 DELETE

4.57 PCIe* Device

Property details are available in the `PCIeDevice.xml` metadata file. This resource is required for PNC service.

Note: Chassis property in the links section of the Intel® RSD implementation points to a single Chassis (the array contains only one element).

4.57.1 Operations

4.57.1.1 GET

Request:

```

GET /redfish/v1/Chassis/1/PCIeDevices/Device1
Content-Type: application/json


```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#PCIeDevice.PCIeDevice",
  "@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/Device1",
  "@odata.type": "#PCIeDevice.v1_0_0.PCIeDevice",
  "Id": " Device1",
  "Name": "NVMe SSD Drive",
  "Description": "Simple NVMe Drive",
  "AssetTag": "free form asset tag",
  "Manufacturer": "Intel",
  "Model": "Model Name",
  "SKU": "",
  "SerialNumber": "SN123456",

```



```
{
  "PartNumber": "",
  "DeviceType": "SingleFunction",
  "FirmwareVersion": "XYZ1234",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "Links": {
    "Chassis": [{
      "@odata.id": "/redfish/v1/Chassis/1"
    }],
    "PCIeFunctions": [
      { "@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/Device1/Functions/1" }
    ],
    "Oem": {}
  },
  "Oem": {}
}
```

4.57.1.2 PUT

Operation is not allowed on this resource.

4.57.1.3 PATCH

The properties in [Table 29](#) can be updated by the PATCH operation:

Table 29. Properties Updated by Patch Operation

Attribute	Type	Required	Description
AssetTag	String	No	The user assigned asset tag for this storage PCIe device.

```
PATCH /redfish/v1/Chassis/1/PCIeDevices/Device1
Content-Type: application/json
{
  "AssetTag": "NVMe drive #1"
}
```

Response:

```
HTTP/1.1 204 No Content
```

Or:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

4.57.1.4 POST

Operation is not allowed on this resource.

4.57.1.5 DELETE

Operation is not allowed on this resource.



4.58 PCIe Device Function

Property details are available in the `PCIEFunction.xml` metadata file. This resource is required for PNC service.

4.58.1 Operations

4.58.1.1 GET

Request:

```
GET /redfish/v1/Chassis/1/PCIeDevices/Device1/Functions/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#PCIeFunction.PCIeFunction",
  "@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/Device1/Functions/1",
  "@odata.type": "#PCIeFunction.v1_0_0.PCIeFunction",
  "Id": "1",
  "Name": "SSD",
  "Description": "SSD Drive",
  "FunctionId": 1,
  "FunctionType": "Physical",
  "DeviceClass": "MassStorageController",
  "DeviceId": "0xABCD",
  "VendorId": "0x8086",
  "ClassCode": "0x10802",
  "RevisionId": "0x00",
  "SubsystemId": "0xABCD",
  "SubsystemVendorId": "0xABCD",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "Links": {
    "Drives": [
      { "@odata.id": "/redfish/v1/Chassis/PCIeSwitch1/Drives/Disk.Bay.1" }
    ],
    "PCIeDevice": {
      "@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/Device1"
    }
  },
  "Oem": {}
}
```

4.58.1.2 PUT


Operation is not allowed on this resource.

4.58.1.3 PATCH

Operation is not allowed on this resource.

4.58.1.4 POST

Operation is not allowed on this resource.



4.58.1.5 DELETE

Operation is not allowed on this resource.

4.59 Task Service

This resource represents the task service, which contains all actual tasks created by this service. This resource must be supported by services supporting asynchronous operations (Refer to [Section 4.2](#)).

Property details are available in the `TaskService.xml` metadata file.

4.59.1 Operations

4.59.1.1 GET

Request:

```
GET /redfish/v1/TaskService
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata/TaskService.TaskService",
  "@odata.id": "/redfish/v1/TaskService",
  "@odata.type": "#TaskService.v1_0_0.TaskService",
  "Id": "TaskService",
  "Name": "Tasks Service",
  "DateTime": "2015-03-13T04:14:33+06:00",
  "CompletedTaskOverWritePolicy": "Manual",
  "LifecycleEventOnTaskStateChange": true,
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "ServiceEnabled": true,
  "Tasks": {
    "@odata.id": "/redfish/v1/TaskService/Tasks"
  },
  "Oem": {}
}
```

4.59.1.2 PUT

Operation is not allowed on this resource.

4.59.1.3 PATCH

Operation is not allowed on this resource.

4.59.1.4 POST

Operation is not allowed on this resource.

4.59.1.5 DELETE

Operation is not allowed on this resource.



4.60 Task Collection

This resource represents a collection of resources of Task Collection type.

Property details are available in the `TaskCollection.xml` metadata file.

4.60.1 Operations

4.60.1.1 GET

Request:

```
GET /redfish/v1/TaskService/Tasks
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#TaskCollection.TaskCollection",
  "@odata.id": "/redfish/v1/TaskService/Tasks",
  "@odata.type": "#TaskCollection.TaskCollection",
  "Name": "Task Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/TaskService/Tasks/1"
    }
  ]
}
```

4.60.1.2 PUT

Operation is not allowed on this resource.

4.60.1.3 PATCH

Operation is not allowed on this resource.

4.60.1.4 POST

Operation is not allowed on this resource.


4.60.1.5 DELETE

Operation is not allowed on this resource.

4.61 Task

This resource contains information about a specific Task scheduled by, or being executed by, a Redfish service Task Service.

Property details are available in the `Task.xml` metadata file.



4.61.1 Operations

4.61.1.1 GET

Request:

```
GET /redfish/v1/TaskService/Tasks/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "Description": "Task 1",
  "TaskState": "Completed",
  "StartTime": "2016-08-18T12:00+01:00",
  "EndTime": "2016-08-18T13:13+01:00",
  "TaskStatus": "OK",
  "Messages": [
    {
      "@odata.type": "Message.v1_0_0.Message",
      "MessageId": "Base.1.0.Created",
      "RelatedProperties": [
      ],
      "Message": "The resource has been created successfully",
      "MessageArgs": [
      ],
      "Severity": "OK"
    }
  ]
}
```

4.61.1.2 PUT

Operation is not allowed on this resource.

4.61.1.3 PATCH

Operation is not allowed on this resource.

4.61.1.4 POST

Operation is not allowed on this resource.

4.61.1.5 DELETE

Request:

```
DELETE /redfish/v1/TaskService/Tasks/1
```

Response:

```
HTTP/1.1 204 No Content
```



4.62 Registries (MessageRegistryFileCollection)

This resource represents a collection of the Schema File locator resources.

Property details are available in the `MessageRegistryFileCollection.xml` metadata file.

4.62.1 Operations

4.62.1.1 GET

Request:

```
GET /redfish/v1/Registries
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#MessageRegistryFileCollection.MessageRegistryFileCollection",
  "@odata.id": "/redfish/v1/Registries",
  "@odata.type": "#MessageRegistryFileCollection.MessageRegistryFileCollection",
  "Name": "Registry File Collection",
  "Description": "Registry Repository",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Registries/Base"
    }
  ]
}
```

4.62.1.2 PUT

Operation is not allowed on this resource.

4.62.1.3 PATCH

Operation is not allowed on this resource.

4.62.1.4 POST

Operation is not allowed on this resource.

4.62.1.5 DELETE

Operation is not allowed on this resource.


4.63 Message Registry File

This resource shall be used to represent the Schema File locator resource for a Redfish implementation.

Property details are available in the `MessageRegistryFile.xml` metadata file.

The base message registry file is defined by Redfish. Refer to the following address:

http://redfish.dmtf.org/registries/Base.v1_0_0.json



4.63.1 Operations

4.63.1.1 GET

Request:

```
GET /redfish/v1/Registries/Base
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Registries/Members/$entity",
  "@odata.id": "/redfish/v1/Registries/Base",
  "@odata.type": "#MessageRegistryFile.v1_0_0.MessageRegistryFile",
  "Id": "Base",
  "Name": "Base Message Registry File",
  "Description": "Base Message Registry File locations",
  "Languages": [
    "en"
  ],
  "Registry": "Base.1.0",
  "Location": [
    {
      "Language": "en",
      "PublicationUri": "http://redfish.dmtf.org/registries/Base.v1_0_0.json",
    }
  ],
  "Oem": {}
}
```

4.63.1.2 PUT

Operation is not allowed on this resource.

4.63.1.3 PATCH

Operation is not allowed on this resource.

4.63.1.4 POST

Operation is not allowed on this resource.

4.63.1.5 DELETE

Operation is not allowed on this resource.

4.64 Metric Definition Collection

Property details are available in `MetricDefinitionCollection.xml` metadata file.

4.64.1 Operations



4.64.1.1 GET

Request:

```
GET /redfish/v1/TelemetryService/MetricDefinitions
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#TelemetryService/MetricDefinitions/$entity",
  "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions",
  "@odata.type": "#MetricDefinitionCollection.MetricDefinitionCollection",
  "Name": "Metric Definitions Collection",
  "Description": "description-as-string",
  "Members@odata.count": 5,
  "Members": [
    {
      "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUTemperature"
    },
    {
      "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUHealth"
    },
    {
      "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUBandwidth"
    },
    {
      "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/SLEDTemperatures"
    },
    {
      "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/MemoryHealth"
    }
  ]
}
```

4.64.1.2 PUT

Operation is not allowed on this resource.

4.64.1.3 PATCH

Operation is not allowed on this resource.

4.64.1.4 POST

Operation is not allowed on this resource.

4.64.1.5 DELETE

Operation is not allowed on this resource.

4.65 Metric Definition

Property details are available in the MetricDefinition.xml metadata file. Metric Definition describes either metrics associated with a physical sensor (e.g., exposed by BMC or metrics associated with the specific resource (e.g., statistics of Ethernet Switch Port). This resource is optional for metrics and required for sensors.

4.65.1 Operations

4.65.1.1 GET (Metric Definition for Discrete Sensor)

Request:

```
GET /redfish/v1/TelemetryService/MetricDefinitions/CPUHealth
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#MetricDefinition.MetricDefinition",
  "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUHealth",
  "@odata.type": "#MetricDefinition.v1_0_0.MetricDefinition",
  "Id": "CPUHealth1",
  "Name": "CPU1 IPMI Health Sensor",

  "MetricType": "Discrete",
  "SensorType": "PhysicalSensor",
  "Implementation": "PhysicalSensor",
  "SensingInterval": "PT1S",
  "PhysicalContext": "CPU",
  "DiscreteValues":
    "OK",
    "Internal Error",
    "Thermal Trip",
    "FRB1 BIST Failure",
    "FRB2 Hang in Post",
    "FRB3 Startup Failure",
    "Config Error",
    "SMBIOS Uncorrectable Error",
    "Processor Presence Detected",
    "Processor Disabled",
    "Terminator Presence Detected",
    "Processor Throttled",
    "Machine Check Exception",
    "Correctable Machine Check Error"
  ],
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth"
  ],
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.MetricDefinition",
      "DiscreteMetricType": "Multiple"
    }
  }
}
```



4.65.1.2 GET (Metric Definition for Numeric Sensor)

Request:

```
GET /redfish/v1/TelemetryService/MetricDefinitions/CPUTemperature
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#MetricDefinition.MetricDefinition",
  "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUTemperature",
  "@odata.type": "#MetricDefinition.v1_0_0.MetricDefinition",
  "Description": "CPU1 Temperature MetricDefinition",
  "Name": "Temperature MetricDefinition",
  "Id": "TEMP1",
  "SensorType": "Temperature",
  "Implementation": "Physical",
  "SensingInterval": "PT1S",
  "MetricType": "Numeric",
  "PhysicalContext": "CPU",
  "Units": "Cel",
  "MinReadingRange": 0,
  "MaxReadingRange": 80,
  "Precision": 1,
  "Calibration": 2,
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"
  ]
}
```

4.65.1.3 GET (Metric Definition for Counter or Metric not associated with Sensor)

Request:

```
GET /redfish/v1/TelemetryService/MetricDefinitions/CPUBandwidth
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#MetricDefinition.MetricDefinition",
  "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions/CPUBandwidth",
  "@odata.type": "#MetricDefinition.v1_0_0.MetricDefinition",
  "Id": "CPUBandwidth",
  "Name": "CPU Bandwidth type",
  "MetricType": "Numeric",
  "Implementation": "DigitalMeter",
  "PhysicalContext": "CPU",
  "SensingInterval": "PT1S",
  "Units": "%",
  "MinReadingRange": 0,
  "MaxReadingRange": 100,
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUBandwidthPercent"
  ],
  "Oem": {
    "Intel_RackScale": {
      "@odata.type": "#Intel.Oem.MetricDefinition",
      "CalculationPrecision": 5
    }
  }
}
```

```
}
}
}
```

4.65.1.4 PUT

Operation is not allowed on this resource.

4.65.1.5 PATCH

Operation is not allowed on this resource.

4.65.1.6 POST

Operation is not allowed on this resource.

4.65.1.7 DELETE

Operation is not allowed on this resource.

4.66 Telemetry Service

Property details are available in the `TelemetryService.xml` metadata file.

4.66.1 Operations

4.66.1.1 GET

Request:

```
GET /redfish/v1/TelemetryService
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#TelemetryService",
  "@odata.type": "#TelemetryService.v1_0_0.TelemetryService",
  "@odata.id": "/redfish/v1/TelemetryService",
  "Id": "TelemetryService",
  "Name": "Telemetry Service",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "MetricDefinitions": {
    "@odata.id": "/redfish/v1/TelemetryService/MetricDefinitions"
  }
}
```

4.66.1.2 PUT

Operation is not allowed on this resource.



4.66.1.3 PATCH

Operation is not allowed on this resource.

4.66.1.4 POST

Operation is not allowed on this resource.

4.66.1.5 DELETE

Operation is not allowed on this resource.

4.67 Metric Report Definition Collection

Property details are available in the `MetricReportDefinitionCollection.xml` metadata file.

Note: In the Intel® RSD PSME implementation, the Metric Report Definition Collection resource is not implemented.

4.67.1 Operations

4.67.1.1 GET

Request:

```
GET /redfish/v1/TelemetryService/MetricReportDefinitions
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#TelemetryService/MetricReportDefinitions/$entity",
  "@odata.id": "/redfish/v1/TelemetryService/MetricReportDefinitions",
  "@odata.type":
"#MetricReportDefinitionCollection.MetricReportDefinitionCollection",
  "Name": "MetricReportDefinition Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id":
"/redfish/v1/TelemetryService/MetricReportDefinitions/CPU1Metrics"
    }
  ]
}
```

4.67.1.2 PUT

Operation is not allowed on this resource.

4.67.1.3 PATCH

Operation is not allowed on this resource.

4.67.1.4 POST

Request:

```
POST /redfish/v1/TelemetryService/MetricReportDefinitions
Content-Type: application/json
{
  "Name": "CPU1 Metric Publisher",
  "Schedule": {
    "RecurrenceInterval": "PT1M"
  },
  "MetricReportType": "Periodic",
  "CollectionTimeScope": "Interval",
  "ReportActions": ["Transmit", "Log"],
  "MetricReport": {"@odata.id":
"/redfish/v1/TelemetryService/MetricReports/TransmitCPU1Metrics"},
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/BandwidthPercent",
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth",
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"
  ]
}
```

Response:

```
HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/TelemetryService/MetricReportDefinitions/1
```

4.67.1.5 DELETE

Operation is not allowed on this resource.

4.68 Metric Report Definition

Property details are available in the `MetricReportDefinition.xml` metadata file.

Note: In the Intel® RSD PSME implementation, the Metric Report Definition resource is not implemented.

4.68.1 Operations

4.68.1.1 GET

Request:

```
GET /redfish/v1/TelemetryService/MetricReportDefinitions/CPU1Metrics
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#MetricReportDefinition",
  "@odata.type": "#MetricReportDefinition.1.0.0.MetricReportDefinition",
  "@odata.id": "/redfish/v1/TelemetryService/MetricReportDefinitions/CPU1Metrics",
  "Id": "CPUEventPublish",
  "Name": "CPU1 Metric Publisher",
  "Schedule": {
    "RecurrenceInterval": "PT1M"
  },
  "MetricReportType": "Periodic",
}
```



```

"CollectionTimeScope": "Interval",
"ReportActions": ["Transmit", "Log"],
"MetricReport": {"@odata.id":
"/redfish/v1/TelemetryService/MetricReports/TransmitCPU1Metrics"},
"Status": {
  "State": "Enabled",
  "Health": "OK"
},
"MetricProperties": [
  "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/BandwidthPercent",
  "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth",
  "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"
]
}

```

4.68.1.2 PUT

Operation is not allowed on this resource.

4.68.1.3 PATCH

Operation is not allowed on this resource.

4.68.1.4 POST

Operation is not allowed on this resource.

4.68.1.5 DELETE

Request:

```
DELETE /redfish/v1/TelemetryService/MetricReportDefinitions/CPUEventPublish
```

Response:

```
HTTP/1.1 204 No Content
```

4.69 Metric Report Collection

Property details are available in the `MetricReportCollection.xml` metadata file.

Note: In the current PSME implementation, the Metric Report Collection resource is not implemented.

4.69.1 Operations

4.69.1.1 GET

Request:

```
GET /redfish/v1/TelemetryService/MetricReports
Content-Type: application/json
```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#TelemetryService/MetricReports",
  "@odata.id": "/redfish/v1/TelemetryService/MetricReports",
  "@odata.type": "#MetricReportCollection.MetricReportCollection",
  "Name": "MetricReports",
  "Members@odata.count": 1,

```

```

    "Members": [
      { "@odata.id":
"/redfish/v1/TelemetryService/MetricReports/TransmitCPU1Metrics" }
    ]
  }

```

4.69.1.2 PUT

Operation is not allowed on this resource.

4.69.1.3 PATCH

Operation is not allowed on this resource.

4.69.1.4 POST

Operation is not allowed on this resource.

4.69.1.5 DELETE

Operation is not allowed on this resource.

4.70 Metric Report

Property details are available in the `MetricReport.xml` metadata file.

Note: In the current PSME implementation, the Metric Report resource is not implemented.

4.70.1 Operations

4.70.1.1 GET

Request:

```

GET /redfish/v1/TelemetryService/MetricReports/TransmitCPU1Metrics
Content-Type: application/json

```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#MetricReport.MetricReport",
  "@odata.type": "#MetricReport.v1_0_0.MetricReport",
  "@odata.id": "/redfish/v1/TelemetryService/MetricReports/TransmitCPU1Metrics",
  "Id": "TransmitCPU1Metrics",
  "Name": "CPU1 Metric Report",
  "Description": "description-as-string",
  "MetricReportDefinition": { "@odata.id":
"/redfish/v1/TelemetryService/MetricReportDefinitions/CPU1Metrics" },
  "MetricValues": [
    {
      "MetricValue": "29",
      "Timestamp": "2016-07-25T11:27:59.895513984+02:00",
      "MetricProperty":
"/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/BandwidthPercent",
      "MetricDefinition": { "@odata.id":
"/redfish/v1/TelemetryService/MetricDefinitions/CPUBandwidth" }
    },
    {

```



```

        "MetricValue": "FRB1 BIST Failure",
        "Timestamp": "2016-07-25T11:27:59.795513984+02:00",
        "MetricProperty": { "@odata.id":
"/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth"},
        "MetricDefinition": { "@odata.id":
"/redfish/v1/TelemetryService/MetricDefinitions/CPUHealth" }
    },
    {
        "MetricValue": "43",
        "Timestamp": "2016-07-25T11:27:59.595513984+02:00",
        "MetricProperty": { "@odata.id":
"/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"},
        "MetricDefinition": { "@odata.id":
"/redfish/v1/TelemetryService/MetricDefinitions/CPUTemperature" }
    }
]
}

```

4.70.1.2 PUT

Operation is not allowed on this resource.

4.70.1.3 PATCH

Operation is not allowed on this resource.

4.70.1.4 POST

Operation is not allowed on this resource.

4.70.1.5 DELETE

Operation is not allowed on this resource.

4.71 Triggers Collection

Property details are available in the `TriggersCollection.xml` metadata file.

Note: In the current PSME implementation, the `TriggersCollection` resource is not implemented.

4.71.1 Operations

4.71.1.1 GET

Request:

```

GET /redfish/v1/TelemetryService/Triggers
Content-Type: application/json

```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#TelemetryService/Triggers/$entity",
  "@odata.id": "/redfish/v1/TelemetryService/Triggers",
  "@odata.type": "#TriggersCollection.TriggersCollection",
  "Name": "Triggers Collection",
  "Members@odata.count": 6,
  "Members": [
    {

```

```

        "@odata.id":
"/redfish/v1/TelemetryService/Triggers/ProcessorCatastrophicError"
    },
    {
        "@odata.id":
"/redfish/v1/TelemetryService/Triggers/ProcessorInitializationError"
    },
    {
        "@odata.id":
"/redfish/v1/TelemetryService/Triggers/ProcessorMachineCheckError"
    },
    {
        "@odata.id": "/redfish/v1/TelemetryService/Triggers/ProcessorPOSTFailure"
    },
    {
        "@odata.id": "/redfish/v1/TelemetryService/Triggers/ProcessorTemperature"
    },
    {
        "@odata.id": "/redfish/v1/TelemetryService/Triggers/ProcessorThermalTrip"
    }
    ]
}

```

4.71.1.2 PUT

Operation is not allowed on this resource.

4.71.1.3 PATCH

Operation is not allowed on this resource.

4.71.1.4 POST (Numeric Trigger)

Request:

```

POST /redfish/v1/TelemetryService/Triggers
Content-Type: application/json
{
  "Name": "Triggers for Processor Temperature Malfunction",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "MetricType": "Numeric",
  "TriggerActions": [
    "Transmit"
  ],
  "NumericTriggers": [
    {
      "Name": "UpperThresholdCritical",
      "Value": "90",
      "DirectionOfCrossing": "Increasing",
      "DwellTimems": "1",
      "Severity": "Critical"
    },
    {
      "Name": "UpperThresholdNonCritical",
      "Value": "75",
      "DirectionOfCrossing": "Increasing",
      "DwellTimems": "4",
      "Severity": "Warning"
    }
  ]
}

```



```

    }
  ],
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU0/Metrics#/TemperatureCelsius",
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"
  ]
}

```

Response:

```

HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/TelemetryService/Triggers/1

```

4.71.1.5 POST (Discrete Trigger)**Request:**

```

POST /redfish/v1/TelemetryService/Triggers
Content-Type: application/json
{
  "Name": "Trigger for Processor Machine Check Error",
  "Description": "Triggers for System1 Processor Machine Check Error",

  "MetricType": "Discrete",
  "TriggerActions": [
    "Transmit"
  ],
  "DiscreteTriggerCondition": "Specified",
  "DiscreteTriggers": [
    {
      "Value": "Machine Check Exception",
      "DwellTimems": "1",
      "Severity": "Critical"
    }
  ],

  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU0/Metrics#/CPUHealth",
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth"
  ]
}

```

Response:

```

HTTP/1.1 201 Created
Location: http://<IP>:<PORT>/redfish/v1/TelemetryService/Triggers/2

```


4.71.1.6 DELETE

Operation is not allowed on this resource.

4.72 Triggers

Property details are available in the `Triggers.xml` metadata file.

Note: In the current PSME implementation, the Triggers resource is not implemented.



4.72.1 Operations

4.72.1.1 GET (Numeric Trigger)

Request:

```
GET /redfish/v1/TelemetryService/Triggers/ProcessorTemperature
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#TelemetryService/Triggers/Members/$entity",
  "@odata.id": "/redfish/v1/TelemetryService/Triggers/ProcessorTemperature",
  "@odata.type": "#Trigger.v1_0_0.Trigger",
  "Id": "ProcessorTemperature",
  "Name": "Triggers for Processor Temperature Malfunction",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "MetricType": "Numeric",
  "TriggerActions": [
    "Transmit"
  ],
  "NumericTriggers": [
    {
      "Name": "UpperThresholdCritical",
      "Value": "90",
      "DirectionOfCrossing": "Increasing",
      "DwellTimems": "1",
      "Severity": "Critical"
    },
    {
      "Name": "UpperThresholdNonCritical",
      "Value": "75",
      "DirectionOfCrossing": "Increasing",
      "DwellTimems": "4",
      "Severity": "Warning"
    }
  ],
  "MetricProperties": [
    "/redfish/v1/Systems/System1/Processors/CPU0/Metrics#/TemperatureCelsius",
    "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/TemperatureCelsius"
  ]
}
```

4.72.1.2 GET (Discrete Trigger)

Request:

```
GET /redfish/v1/TelemetryService/Triggers/ProcessorMachineCheckError
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#TelemetryService/Triggers/Members/$entity",
  "@odata.id": "/redfish/v1/TelemetryService/Triggers/ProcessorMachineCheckError",
  "@odata.type": "#Trigger.v1_0_0.Trigger",
  "Id": "ProcessorMachineCheckError",
  "Name": "Trigger for Processor Machine Check Error",

```



```

"Description": "Triggers for System1 Processor Machine Check Error",

"MetricType": "Discrete",
"TriggerActions": [
  "Transmit"
],
"DiscreteTriggerCondition": "Specified",
  "DiscreteTriggers": [
    {
      "Value": "Machine Check Exception",
      "DwellTimems": "1",
      "Severity": "Critical"
    }
  ],
"Status": {
  "State": "Enabled",
  "Health": "OK"
},
"MetricProperties": [
  "/redfish/v1/Systems/System1/Processors/CPU0/Metrics#/CPUHealth",
  "/redfish/v1/Systems/System1/Processors/CPU1/Metrics#/CPUHealth"
]
}

```

4.72.1.3 PUT

Operation is not allowed on this resource.

4.72.1.4 PATCH

Operation is not allowed on this resource.

4.72.1.5 POST

Operation is not allowed on this resource.

4.72.1.6 DELETE

Request:

```
DELETE /redfish/v1/TelemetryService/Triggers/ProcessorMachineCheckError
```


Response:

```
HTTP/1.1 204 No Content
```

4.73 Power

The Power metrics resource represents the properties for Power Consumption and Power Limiting.

Detailed information about resource properties can be obtained from the metadata file: [Power.xml](#). OEM extensions details are available in the [IntelRackScaleOem.xml](#).



4.73.1 Operations

4.73.1.1 GET (Rack Level Power Metrics)

Request:

```
GET /redfish/v1/Chassis/Rack1/Power
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Power.Power",
  "@odata.id": "/redfish/v1/Chassis/Drawer1/Power",
  "@odata.type": "#Power.v1_1_0.Power",
  "Id": "Power",
  "Name": "Power",
  "Description": "PowerSubsystem",
  "PowerControl": [
    {
      "MemberId": "0",
      "Name": "System Power Control",
      "PowerConsumedWatts": 8000,
      "PowerRequestedWatts": null,
      "PowerAvailableWatts": null,
      "PowerCapacityWatts": 10000,
      "PowerAllocatedWatts": null,
      "PowerMetrics": {
        "IntervalInMin": 30,
        "MinConsumedWatts": 7500,
        "MaxConsumedWatts": 8200,
        "AverageConsumedWatts": 8000
      },
      "PowerLimit": {
        "LimitInWatts": null,
        "LimitException": null,
        "CorrectionInMs": null
      },
      "RelatedItem": [
        {"@odata.id": "/redfish/v1/Systems/System1"}
      ],
      "Status": {
        "State": "Enabled",
        "Health": "OK",
        "HealthRollup": "OK"
      },
      "Oem": {}
    }
  ],
  "Voltages": [
    {
      "MemberId": "0",
      "Name": "VRM1 Voltage",
      "SensorNumber": 11,
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      },
      "ReadingVolts": 12,
      "PhysicalContext": "VoltageRegulator",
      "RelatedItem": [
        {"@odata.id": "/redfish/v1/Systems/System1"}
      ]
    }
  ]
}
```



```

    ]
  }
],
"PowerSupplies": [
  {
    "MemberId": "0",
    "Name": "Power Supply Bay 1",
    "Status": {
      "State": "Enabled",
      "Health": "Warning"
    },
    "Oem": {},
    "PowerSupplyType": "DC",
    "LineInputVoltageType": "DCNeg48V",
    "LineInputVoltage": -48,
    "PowerCapacityWatts": 400,
    "LastPowerOutputWatts": 192,
    "Model": "499253-B21",
    "Manufacturer": "ManufacturerName",
    "FirmwareVersion": "1.00",
    "SerialNumber": "1z0000001",
    "PartNumber": "1z0000001A3a",
    "SparePartNumber": "0000001A3a",
    "InputRanges": [
    ],
    "IndicatorLED": "Off",
    "RelatedItem": [
      { "@odata.id": "/redfish/v1/Chassis/Drawer1" }
    ],
    "Redundancy": [
      { "@odata.id": "/redfish/v1/Chassis/Drawer1/Power#/Redundancy/0" }
    ]
  }
],
"Redundancy": [
  {
    "MemberId": "0",
    "Name": "PowerSupply Redundancy Group 1",
    "Mode": "Failover",
    "MaxNumSupported": 2,
    "MinNumNeeded": 1,
    "RedundancySet": [
      { "@odata.id": "/redfish/v1/Chassis/Drawer1/Power#/PowerSupplies/0" }
    ],
    "Status": {
      "State": "Offline",
      "Health": "OK"
    }
  }
],
"Oem": {}
}

```

4.73.1.2 GET (SLED level Power Metrics)

Chassis metrics that are available on the SLED level differ from those available on the Rack level; therefore, metadata file definition `Power.xml` contains a superset of all Chassis metrics.

Request:

```

GET /redfish/v1/Chassis/Sled1/Power
Content-Type: application/json

```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Power.Power",
  "@odata.id": "/redfish/v1/Chassis/Sled1/Power",
  "@odata.type": "#Power.v1_1_0.Power",
  "Id": "Power",
  "Name": "Power",
  "PowerControl": [
    {
      "@odata.id": "/redfish/v1/Chassis/Sled1/Power#/PowerControl/0",
      "MemberId": "0",
      "Name": "System Power Control",
      "PowerConsumedWatts": 8000,
      "RelatedItem": [
        { "@odata.id": "/redfish/v1/Chassis/Sled1" },
        { "@odata.id": "/redfish/v1/Systems/System1" }
      ],
      "Status": {
        "State": "Enabled",
        "Health": "OK",
        "HealthRollup": "OK"
      },
      "Oem": {}
    }
  ],
  "Oem": {
    "Intel_RackScale": {
      "InputACPowerWatts": 245
    }
  }
}
```

4.73.1.3 PUT

Operation is not allowed on this resource.

4.73.1.4 PATCH

Operation is not allowed on this resource.

4.73.1.5 POST

Operation is not allowed on this resource.

4.73.1.6 DELETE

Operation is not allowed on this resource.

4.74 Thermal

The Thermal metrics resource represents the properties for temperature and cooling.

Detailed information about the resource properties can be obtained from the metadata file: [Thermal.xml](#) OEM extensions details available in [IntelRackScaleOem.xml](#).



4.74.1 Operations

4.74.1.1 GET (Rack Level Thermal Metrics)

Request:

```
GET /redfish/v1/Chassis/Rack1/Thermal
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#Thermal.Thermal",
  "@odata.id": "/redfish/v1/Chassis/Drawer1/Thermal",
  "@odata.type": "#Thermal.v1_1_0.Thermal",
  "Id": "Thermal",
  "Name": "Thermal",
  "Description": "Thermal Subsystem",
  "Temperatures": [
    {
      "MemberId": "0",
      "Name": "Drawer inlet Temp",
      "SensorNumber": 42,
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      },
      "ReadingCelsius": 21,
      "PhysicalContext": "Intake",
      "RelatedItem": [
        { "@odata.id": "/redfish/v1/Chassis/Drawer1" }
      ]
    }
  ],
  "Fans": [
    {
      "MemberId": "0",
      "Name": "BaseBoard System Fan",
      "PhysicalContext": "Backplane",
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      },
      "Reading": 2100,
      "ReadingUnits": "RPM",
      "Redundancy": [
        { "@odata.id": "/redfish/v1/Chassis/Drawer1/Thermal#/Redundancy/0" }
      ],
      "RelatedItem": [
        { "@odata.id": "/redfish/v1/Chassis/Drawer1" }
      ]
    }
  ],
  "Redundancy": [
    {
      "MemberId": "0",
      "Name": "BaseBoard System Fans",
      "RedundancyEnabled": false,
      "RedundancySet": [
        { "@odata.id": "/redfish/v1/Chassis/Drawer1/Thermal#/Fans/0" }
      ],
      "Mode": "N+m",
      "Status": {
```

```

        "State": "Disabled",
        "Health": "OK"
    },
    "MinNumNeeded": 1,
    "MaxNumSupported": 2
}
]
}

```

4.74.1.2 PUT

Operation is not allowed on this resource.

4.74.1.3 PATCH

Operation is not allowed on this resource.

4.74.1.4 POST

Operation is not allowed on this resource.

4.74.1.5 DELETE

Operation is not allowed on this resource.

4.74.1.6 GET (SLED Level Thermal Metrics)

SLED Level Thermal Metrics differ from Rack Level Thermal Metrics; therefore, metadata definition file `Thermal.xml` contains the superset of all available Thermal Metrics.

Request:

```

GET /redfish/v1/Chassis/Rack1/Thermal
Content-Type: application/json

```

Response:

```

{
  "@odata.context": "/redfish/v1/$metadata#Thermal.Thermal",
  "@odata.id": "/redfish/v1/Chassis/Sled1/Thermal",
  "@odata.type": "#Thermal.v1_1_0.Thermal",
  "Id": "Thermal",
  "Name": "Thermal",
  "Temperatures": [
    {
      "@odata.id": "/redfish/v1/Chassis/Sled1/Thermal#/Temperatures/0",
      "MemberId": "0",
      "Name": "SLED inlet Temp",
      "SensorNumber": 42,
      "Status": {
        "State": "Enabled",
        "Health": "OK"
      },
      "ReadingCelsius": 21,
      "UpperThresholdNonCritical": 42,
      "UpperThresholdCritical": 42,
      "UpperThresholdFatal": 42,
      "LowerThresholdNonCritical": 42,
      "LowerThresholdCritical": 5,
      "LowerThresholdFatal": 42,
      "MinReadingRangeTemp": 0,
    }
  ]
}

```



```

        "MaxReadingRangeTemp": 200,
        "PhysicalContext": "Intake",
        "RelatedItem": [
            { "@odata.id": "/redfish/v1/Chassis/Sled1" }
        ]
    },
    {
        "@odata.id": "/redfish/v1/Chassis/Sled1/Thermal#/Temperatures/1",
        "MemberId": "0",
        "Name": "SLED Outlet Temp",
        "SensorNumber": 43,
        "Status": {
            "State": "Enabled",
            "Health": "OK"
        },
        "ReadingCelsius": 44,
        "UpperThresholdNonCritical": 55,
        "UpperThresholdCritical": 55,
        "UpperThresholdFatal": 55,
        "LowerThresholdNonCritical": 55,
        "LowerThresholdCritical": 5,
        "LowerThresholdFatal": 42,
        "MinReadingRangeTemp": 0,
        "MaxReadingRangeTemp": 200,
        "PhysicalContext": "Exhaust",
        "RelatedItem": [
            {
                "@odata.id": "/redfish/v1/Chassis/Sled1"
            }
        ]
    }
],
    "Oem": {
        "Intel_RackScale": {
            "VolumetricAirFlowCfm": 12
        }
    }
}

```

4.74.1.7 PUT

Operation is not allowed on this resource.

4.74.1.8 PATCH


Operation is not allowed on this resource.

4.74.1.9 POST

Operation is not allowed on this resource.

4.74.1.10 DELETE

Operation is not allowed on this resource.



4.75 Network Interface Collection

Property details are available in the `NetworkInterfaceCollection.xml` metadata file.

4.75.1 Operations

4.75.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/NetworkInterfaces
Content-Type: application/json
```

Response:

```
{
  "@odata.context":
"/redfish/v1/$metadata#NetworkInterfaceCollection.NetworkInterfaceCollection",
  "@odata.id": "/redfish/v1/Systems/System1/NetworkInterfaces",
  "@odata.type": "# NetworkInterfaceCollection.NetworkInterfaceCollection",
  "Name": "Network Interface Collection",
  "Description": "description-as-string",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id": "/redfish/v1/Systems/System1/NetworkInterfaces/1"
    }
  ]
}
```

4.75.1.2 PUT

Operation is not allowed on this resource.

4.75.1.3 PATCH

Operation is not allowed on this resource.

4.75.1.4 POST

Operation is not allowed on this resource.

4.75.1.5 DELETE

Operation is not allowed on this resource.

4.76 Network Interface

Network Interface contains references linking the `NetworkDeviceFunction` resources and represents network functionality available to the containing system.

Property details are available in the `NetworkInterface.xml` metadata file.



4.76.1 Operations

4.76.1.1 GET

Request:

```
GET /redfish/v1/Systems/System1/NetworkInterfaces/1
Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#NetworkInterface.NetworkInterface",
  "@odata.id": "/redfish/v1/Systems/System1/NetworkInterfaces/1",
  "@odata.type": "# NetworkInterface.v1_0_0.NetworkInterface",
  "Id": "1",
  "Name": "Network Device View",
  "Description": "Network Device View",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "NetworkDeviceFunctions": {
    "@odata.id":
"/redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions"
  },
  "Links": {
  },
  "Oem": {}
}
```

4.76.1.2 PUT

Operation is not allowed on this resource.

4.76.1.3 PATCH

Operation is not allowed on this resource.

4.76.1.4 POST

Operation is not allowed on this resource.

4.76.1.5 DELETE


Operation is not allowed on this resource.

4.77 Network Device Function Collection

Property details are available in the `NetworkDeviceFunctionCollection.xml` metadata file.

4.77.1 Operations

4.77.1.1 GET

**Request:**

```
GET /redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions Content-Type: application/json
```

Response:

```
{
  "@odata.context": "/redfish/v1/$metadata#NetworkDeviceFunctionCollection",
  "@odata.id":
"/redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions",
  "@odata.type": "#NetworkDeviceFunctionCollection",
  "Name": "Network Device Function Collection",
  "Members@odata.count": 1,
  "Members": [
    {
      "@odata.id":
"/redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions/1"
    }
  ]
}
```

4.77.1.2 PUT

Operation is not allowed on this resource.

4.77.1.3 PATCH

Operation is not allowed on this resource.

4.77.1.4 POST

Operation is not allowed on this resource.

4.77.1.5 DELETE

Operation is not allowed on this resource.

4.78 Network Device Function

Network Device Function represents a logical interface exposed by the network adapter.

Property details are available in the `NetworkDeviceFunction.xml` metadata file.

4.78.1 Operations

4.78.1.1 GET

Note: Because of the confidential nature of CHAP secret fields, they cannot be shown in a GET request, *null* is shown instead.

Request:

```
GET /redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions/1 Content-Type: application/json
```

**Response:**

```
{
  "@odata.context":
"/redfish/v1/$metadata#NetworkDeviceFunction.NetworkDeviceFunction",
  "@odata.id":
"/redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions/1",
  "@odata.type": "#NetworkDeviceFunction.v1_0_0.NetworkDeviceFunction",
  "Id": "1",
  "Name": "Network Device Function View",
  "Description": "Network Device Function View",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "DeviceEnabled": true,
  "Ethernet": {
    "MACAddress": "00:0C:29:9A:98:ED"
  },
  "iSCSIBoot": {
    "IPAddressType": "IPv4",
    "InitiatorIPAddress": "10.0.10.10",
    "InitiatorName": "iqn.2017-03.com.intel:workload-server",
    "InitiatorDefaultGateway": "10.0.10.1",
    "InitiatorNetmask": "255.255.255.0",
    "TargetInfoViaDHCP": false,
    "PrimaryTargetName": "iqn.2017-03.com.intel:image-server",
    "PrimaryTargetIPAddress": "10.0.10.254",
    "PrimaryTargetTCPPort": 3260,
    "PrimaryLUN": 1,
    "PrimaryVLANEnable": true,
    "PrimaryVLANId": 4088,
    "PrimaryDNS": null,
    "SecondaryTargetName": null,
    "SecondaryTargetIPAddress": null,
    "SecondaryTargetTCPPort": null,
    "SecondaryLUN": null,
    "SecondaryVLANEnable": null,
    "SecondaryVLANId": null,
    "SecondaryDNS": null,
    "IPMaskDNSViaDHCP": false,
    "RouterAdvertisementEnabled": false,
    "AuthenticationMethod": "CHAP",
    "CHAPUsername": "user",
    "CHAPSecret": null,
    "MutualCHAPUsername": "mutualuser",
    "MutualCHAPSecret": null
  },
  "Links": {
  },
  "Oem": {}
}
```

4.78.1.2 PUT

Operation is not allowed on this resource.



4.78.1.3 PATCH

The PATCH method should be used to enable iSCSI boot of the compute node ([Table 30](#)). After patching this resource, set the `BootOverride` target to `RemoteDrive` and submit a PATCH to the `ComputerSystem.Reset` action. Attributes for this method are listed in [Table 30](#), [Table 31](#), and [Table 32](#).

Table 30. Properties Updated by Patch Operation

Attribute	Type	Required	Description
Ethernet	Object	No	Ethernet capabilities for this network device function. Details in table below.
iSCSIBoot	Object	No	iSCSI boot has capabilities, status, and configuration values for these network device function—details in Table 31 .

Table 31. Ethernet Object Properties

Attribute	Type	Required	Description
MACAddress	String	No*	MAC address of NIC to be used for iSCSI boot.

Table 32. iSCSIBoot Object Properties

Attribute	Type	Required	Description
IPAddressType	String (enum)	No	The type of IP address (IPv6 or IPv4) being populated in the <code>iSCSIBoot</code> IP address fields.
InitiatorIPAddress	String	No	Address of the iSCSI initiator.
InitiatorName	String	No	The iSCSI initiator name.
InitiatorDefaultGateway	String	No	The IPv6 or IPv4 iSCSI boot default gateway.
InitiatorNetmask	String	No	The IPv6 or IPv4 netmask of the iSCSI boot initiator.
TargetInfoViaDHCP	Boolean	No	Whether the iSCSI boot target name, LUN, IP address, and netmask should be obtained from DHCP.
PrimaryTargetName	String	No	The name of the iSCSI primary boot target.
PrimaryTargetIPAddress	String	No	The IP address (IPv6 or IPv4) for the primary iSCSI boot target.
PrimaryTargetTCPPort	Number	No	The TCP port for the primary iSCSI boot target.
PrimaryLUN	Number	No	The logical unit number (LUN) for the primary iSCSI boot target.
PrimaryVLANEnable	Boolean	No	This indicates if the primary VLAN is enabled.
PrimaryVLANId	Number	No	The 802.1q VLAN ID to use for iSCSI boot from the primary target.
PrimaryDNS	String	No	The IPv6 or IPv4 address of the primary DNS server for the iSCSI boot initiator.
SecondaryTargetName	String	No	The name of the iSCSI secondary boot target.
SecondaryTargetIPAddress	String	No	The IP address (IPv6 or IPv4) for the secondary iSCSI boot target.
SecondaryTargetTCPPort	Number	No	The TCP port for the secondary iSCSI boot target.
SecondaryLUN	Number	No	The logical unit number (LUN) for the secondary iSCSI boot target.
SecondaryVLANEnable	Boolean	No	This indicates if the secondary VLAN is enabled.
SecondaryVLANId	Number	No	The 802.1q VLAN ID to use for iSCSI boot from the secondary target.
SecondaryDNS	String	No	The IPv6 or IPv4 address of the secondary DNS server for the iSCSI boot initiator.
IPMaskDNSViaDHCP	Boolean	No	Whether the iSCSI boot initiator uses DHCP to obtain the initiator name, IP address, and netmask.
RouterAdvertisementEnabled	Boolean	No	Whether IPv6 router advertisement is enabled for the iSCSI boot target.



Attribute	Type	Required	Description
AuthenticationMethod	String (enum)	No	The iSCSI boot authentication method for this network device function. Supported values: "None" "CHAP" "MutualCHAP"
CHAPUsername	String	No	The username for CHAP authentication.
CHAPSecret	String	No	The shared secret for CHAP authentication.
MutualCHAPUsername	String	No	The CHAP Username for 2-way CHAP authentication.
MutualCHAPSecret	String	No	The CHAP Secret for 2-way CHAP authentication.

Request:

```
PATCH /redfish/v1/Systems/System1/NetworkInterfaces/1/NetworkDeviceFunctions/1
Content-Type: application/json
```

```
{
  "Ethernet": {
    "MACAddress": "00:0C:29:9A:98:ED"
  },
  "iSCSIBoot": {
    "IPAddressType": "IPv4",
    "InitiatorIPAddress": "10.0.10.10",
    "InitiatorName": "iqn.2017-03.com.intel:workload-server",
    "InitiatorDefaultGateway": "10.0.10.1",
    "InitiatorNetmask": "255.255.255.0",
    "TargetInfoViaDHCP": false,
    "PrimaryTargetName": "iqn.2017-03.com.intel:image-server",
    "PrimaryTargetIPAddress": "10.0.10.254",
    "PrimaryTargetTCPPort": 3260,
    "PrimaryLUN": 1,
    "PrimaryVLANEnable": true,
    "PrimaryVLANId": 4088,
    "PrimaryDNS": null,
    "SecondaryTargetName": null,
    "SecondaryTargetIPAddress": null,
    "SecondaryTargetTCPPort": null,
    "SecondaryLUN": null,
    "SecondaryVLANEnable": null,
    "SecondaryVLANId": null,
    "SecondaryDNS": null,
    "IPMaskDNSViaDHCP": false,
    "RouterAdvertisementEnabled": false,
    "AuthenticationMethod": "CHAP",
    "CHAPUsername": "user",
    "CHAPSecret": "userpassword",
    "MutualCHAPUsername": "mutualuser",
    "MutualCHAPSecret": "mutualpassword"
  }
}
```

Response:

```
HTTP/1.1 204 No Content
```

Or:

```
HTTP/1.1 200 OK
{
  (updated resource body)
}
```

Or:

```
HTTP/1.1 202 Accepted
Location: http://<ip:port>/redfish/v1/TaskService/Tasks/1/TaskMonitor
{
  "@odata.context": "/redfish/v1/$metadata#Task.Task",
  "@odata.id": "/redfish/v1/TaskService/Tasks/1",
  "@odata.type": "#Task.v1_0_0.Task",
  "Id": "1",
  "Name": "Task 1",
  "TaskState": "New",
  "StartTime": "2016-09-01T04:45+01:00",
  "TaskStatus": "OK",
  "Messages": [
  ]
}
```

4.78.1.4 POST

Operation is not allowed on this resource.

4.78.1.5 DELETE

Operation is not allowed on this resource.

4.79 Update Service

The Update Service resource represents the properties required to invoke software/firmware update.

Note: In the current release, this functionality is not implemented.

4.79.1 Operations

4.79.1.1 GET

Request:

```
GET /redfish/v1/UpdateService
Content-Type: application/json
```

Response:

```
{
  "@odata.type": "#UpdateService.v1_0_2.UpdateService",
  "Id": "UpdateService",
  "Name": "Update service",
  "Status": {
    "State": "Disabled",
    "Health": null,
    "HealthRollup": null
  },
  "ServiceEnabled": false,
  "Actions": {
    "#UpdateService.SimpleUpdate": {
      "target": "/redfish/v1/UpdateService/Actions/SimpleUpdate",
      "@Redfish.ActionInfo": "/redfish/v1/UpdateService/SimpleUpdateActionInfo"
    },
    "Oem": {}
  },
  "Oem": {},
  "@odata.context": "/redfish/v1/$metadata#UpdateService/$entity",
}
```



```
}
```

4.79.1.2 PUT

Operation is not allowed on this resource.

4.79.1.3 PATCH

Operation is not allowed on this resource.

4.79.1.4 POST

4.79.1.4.1 Simple Update Action

Operation is not allowed on this resource.

4.80 ActionInfo

ActionInfo describes the parameters and other information necessary to perform a Redfish Action to a particular Action target. Because parameter support can differ between implementations and even among instances of a resource, this data can be used to ensure Action requests from applications contain supported parameters.

4.80.1 Operations

4.80.1.1 GET (UpdateService SimpleUpdate Action)

Request:

```
GET /redfish/v1/UpdateService/SimpleUpdateActionInfo
Content-Type: application/json
```

Response:

```
{
  "@odata.type": "#ActionInfo.v1_0_0.ActionInfo",
  "Parameters": [
    {
      "Name": "ImageURI",
      "Required": true,
      "DataType": "String"
    },
    {
      "Name": "TransferProtocol",
      "Required": false,
      "DataType": "String",
      "AllowableValues": []
    },
    {
      "Name": "Targets",
      "Required": false,
      "DataType": "StringArray",
      "AllowableValues": []
    }
  ],
  "Oem": {},
  "@odata.context": "/redfish/v1/$metadata#ActionInfo.ActionInfo",
  "@odata.id": "/redfish/v1/UpdateService/SimpleUpdateActionInfo"
}
```



4.80.1.2 PUT

Operation is not allowed on this resource.

4.80.1.3 PATCH

Operation is not allowed on this resource.

4.80.1.4 POST

Operation is not allowed on this resource.

4.80.1.5 DELETE

Operation is not allowed on this resource.

§



5.0 Required Resources per Service Type


Table 33 lists the types of resources that are required per service type.

R – Required

O – Optional/recommended

Table 33. Required Resources per Service Type

Resource	PSME Compute	PSME Storage	PSME Network	PSME PNC	PSME RMM
\$metadata.xml	R	R	R	R	R
AccountService.xml					
Chassis.xml	R			R	R
ChassisCollection.xml	R	O		R	R
ComposedNode.xml					
ComposedNodeCollection.xml					
ComputerSystem.xml	R	R		R	
ComputerSystemCollection.xml	R			R	
ComputerSystemMetrics.xml	R				
Drive.xml	R	R		R	
Endpoint.xml		R		R	
EndpointCollection.xml		R		R	
EthernetInterface.xml	R	R	R	R	R
EthernetInterfaceCollection.xml	R	R	R	R	R
EthernetSwitch.xml			R		
EthernetSwitchACL.xml			R		
EthernetSwitchACLCollection.xml			R		
EthernetSwitchACLRule.xml			R		
EthernetSwitchACLRuleCollection.xml			R		
EthernetSwitchCollection.xml			R		
EthernetSwitchMetrics.xml			O		
EthernetSwitchPort.xml			R		
EthernetSwitchPortCollection.xml			R		
EthernetSwitchPortMetrics.xml			O		
EthernetSwitchStaticMAC.xml			R		
EthernetSwitchStaticMACCollection.xml			R		
Event.xml	R	R	R	R	R
EventDestination.xml	R	R	R	R	R
EventDestinationCollection.xml	R	R	R	R	R
EventService.xml	R	R	R	R	R
Fabric.xml		R		R	
FabricCollection.xml		R		R	
IntelRackScaleOem.xml	R	R	R	R	R
JsonSchemaFile.xml					
JsonSchemaFileCollection.xml					
LogEntry.xml					
LogEntryCollection.xml					
LogService.xml					
LogServiceCollection.xml					



Resource	PSME Compute	PSME Storage	PSME Network	PSME PNC	PSME RMM
Manager.xml	R	R	R	R	R
ManagerAccount.xml					
ManagerAccountCollection.xml					
ManagerCollection.xml	R	R	R	R	R
ManagerNetworkProtocol.xml					
Memory.xml	R				
MemoryCollection.xml	R				
MemoryMetrics.xml	R				
Message.xml	O	O	O	O	O
MessageRegistry.xml	O	O	O	O	O
MessageRegistryCollection.xml	O	O	O	O	O
MessageRegistryFile.xml	O	O	O	O	O
MessageRegistryFileCollection.xml	O	O	O	O	O
MetricDefinition_v1.xml	R		O	R	O
MetricDefinitionCollection_v1.xml	R		O	R	O
MetricReport.xml	O		O	O	O
MetricReportCollection.xml	O		O	O	O
MetricReportDefinition_v1.xml	O		O	O	O
MetricReportDefinitionCollection_v1.xml	O		O	O	O
NetworkDeviceFunction.xml	R				
NetworkDeviceFunctionCollection.xml	R				
NetworkInterface.xml	R				
NetworkInterfaceCollection.xml	R				
PCiDevice.xml	O			R	
PCiFunction.xml	O			R	
Port.xml				R	
PortCollection.xml				R	
PortMetrics.xml				O	
Power.xml	O				O
PowerZone.xml					
PowerZoneCollection.xml					
Privileges.xml					
Processor.xml	R				
ProcessorCollection.xml	R				
ProcessorMetrics.xml	R				
Redundancy.xml					R
Role.xml					
RoleCollection.xml					
SensorRegistry_v1.xml					
SerialInterface.xml					
SerialInterfaceCollection.xml					
ServiceRoot.xml	R	R	R	R	R
Session.xml					
SessionCollection.xml					
SessionService.xml					
Settings.xml					
SimpleStorage.xml					



Resource	PSME Compute	PSME Storage	PSME Network	PSME PNC	PSME RMM
SimpleStorageCollection.xml					
Storage.xml	R				
StorageCollection.xml	R				
StoragePool		R			
StorageService.xml		R			
StorageServiceCollection.xml		R			
Switch.xml				R	
SwitchCollection.xml				R	
Task.xml	R	O	O	R	R
TaskCollection.xml	R	O	O	R	R
TaskService.xml	R	O	O	R	R
TelemetryService_v1.xml	R		O	R	O
Thermal.xml	O				O
ThermalZone.xml					
ThermalZoneCollection.xml					
Triggers_v1.xml	O		O	O	O
TriggersCollection_v1.xml	O		O	O	O
VirtualMedia.xml					
VirtualMediaCollection.xml					
VLanNetworkInterface.xml			R		
VLanNetworkInterfaceCollection.xml			R		
Volume.xml		R			
VolumeCollection.xml		R			
Zone.xml		R		R	
ZoneCollection.xml		R		R	

6.0 Common Property Description

6.1 Status

Table 34. Status

Attribute	Type	Nullable	Description
State	String	Yes	This indicates the known state of the resource, such as if it is enabled. Allowed values: Refer to Section 6.2 .
Health	String	Yes	This represents the health state of this resource in the absence of its dependent resources. Allowed values: Refer to Section 6.3 .
HealthRollup	String	Yes	This represents the overall health state from the view of this resource. Allowed values: Refer to Section 6.3 .

6.2 Status -> State

- **Enabled**: This function or resource has been enabled
- **Disabled**: This function or resource has been disabled
- **StandbyOffline**: This function or resource is enabled, but awaiting an external action to activate it
- **StandbySpare**: This function or resource is part of a redundancy set and is awaiting a failover or other external action to activate it
- **InTest**: This function or resource is undergoing testing
- **Starting**: This function or resource is starting
- **Absent**: This function or resource is not installed
- **UnavailableOffline**: This function or resource is present but cannot be used
- **Deferring**: The element does not process any commands, but queues new requests
- **Quiesced**: The element is enabled, but processes a restricted set of commands
- **Updating**: The element is updating and may be unavailable or degraded

6.3 Status -> Health

- **OK**: Normal
- **Warning**: A condition exists that requires attention
- **Critical**: A critical condition exists that requires immediate attention

6.4 ComputerSystem.Reset

- **On**: Turns the system on
- **ForceOff**: Turns the system off immediately (nongraceful) shutdown
- **GracefulRestart**: Performs a graceful system shutdown followed by a restart of the system
- **ForceRestart**: Performs an immediate (non-graceful) shutdown, followed by a restart of the system
- **Nmi**: Generates a nonmaskable interrupt to cause an immediate system halt
- **ForceOn**: Turns the system on immediately
- **PushPowerButton**: Simulates the pressing of the physical power button on this system
- **GracefulShutdown**: Performs a graceful system shutdown and power off



6.5 Bootsourceoverridetarget/Supported

- **None**: Boot from the normal boot device
- **Pxe**: Boot from the preboot execution (PXE) environment
- **Floppy**: Boot from the floppy disk drive
- **Cd**: Boot from the CD/DVD disc
- **Usb**: Boot from a USB device as specified by the system BIOS
- **Hdd**: Boot from a hard drive
- **BiosSetup** - Boot to the BIOS Setup Utility
- **Utilities**: Boot the manufacturer's Utilities programs
- **Diagnostics**: Boot the manufacturer's Diagnostics program
- **UefiShell**: Boot to the UEFI Shell
- **UefiTarget**: Boot to the UEFI Device specified in the `UefiTargetBootSourceOverride` property
- **SDCard**: Boot from an SD Card
- **UefiHttp**: Boot from a UEFI HTTP network location
- **RemoteDrive**: Boot from a remote drive (e.g. iSCSI)

§